


THESE DRAWINGS ARE THE PROPERTY OF QUALEK  
ELECTRONICS AND NOT TO BE REPRODUCED FOR  
OR COMMUNICATED TO A THIRD PARTY WITHOUT  
THE EXPRESS WRITTEN PERMISSION OF AN OFFICER  
OF QUALEK ELECTRONICS.

REVISION

REV.	DESCRIPTION	DATE	APPROVED
B	RoHS Compliancy	06-01-06	DP

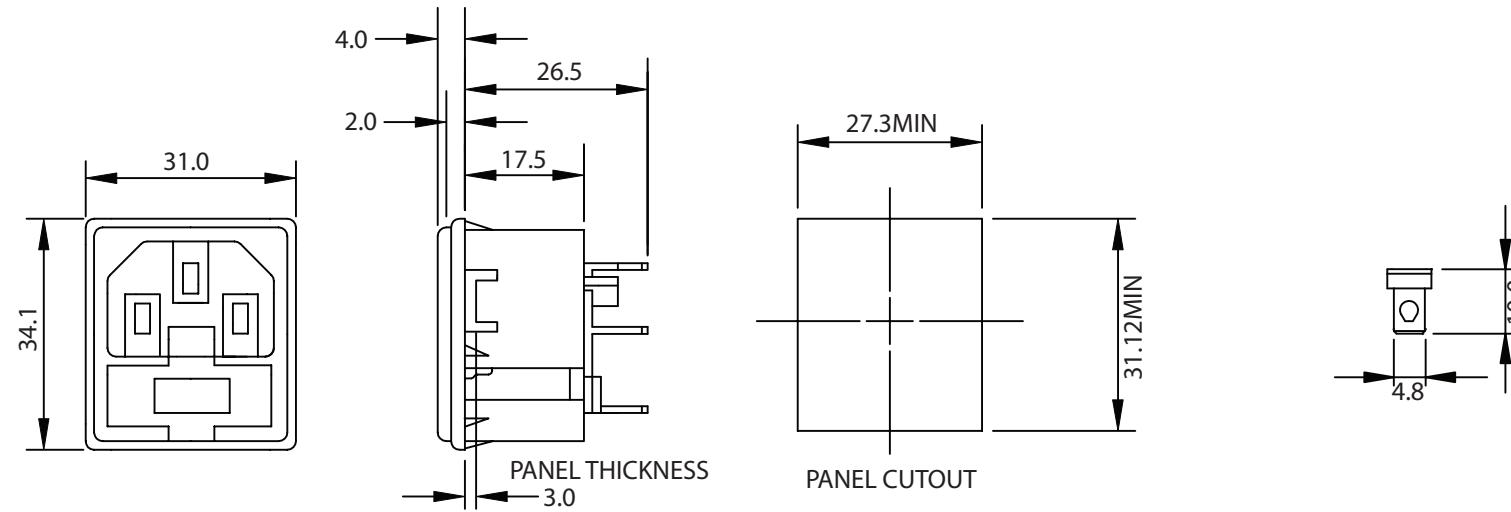

NOTES:

MAX RATING: 10A 250V AC

CONTACT RESISTANCE: <10 m OHM 9<15 OHM INCLUDING FUSEHOLDER

INSULATION RESISTANCE: >10<sup>3</sup> M OHM

A.C. BREAKDOWN: POLE-POLE 5.5kV.

POLES-PANEL 4.0kV

OPERATING TEMPERATURE: -40 °C TO 70 °C

MAX. PIN TEMPERATURE: +65 °C

MATERIALS: NYLON, FLAMMABILITY RATING UL 94 V-0

CONTACTS: BRASS, PINS NICKEL PLATED, TAGS TIN PLATED

DUAL FUSE HOLDER, ONE ACTIVE, ONE SPARE

FUSES NOT INCLUDED - RECOMMENDED SIZE: 5 X 20mm

RoHS COMPLIANT

**CONTROLLED**

Dim range (mm)	Tolerance +/- (mm)	Qualek Electronics Corp. PPC DIVISION		
		Part Number:	723-30/48	RoHS Compliant
0-1	0.15	Description: SNAP-IN INLET WITH FUSEHOLDER		
1-6	0.20			
6-18	0.30			
18-50	0.50			
50-120	0.70		UNIT: mm	REV.B
120-250	0.90		Drawn / Date	Checked / Date
250-500	1.20		B.Zhang 08-06-03	Approved / Date JJH / 08-06-03

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Qualtek:

723-30/48