



10 9 8 7 6 5 4 3 2 1

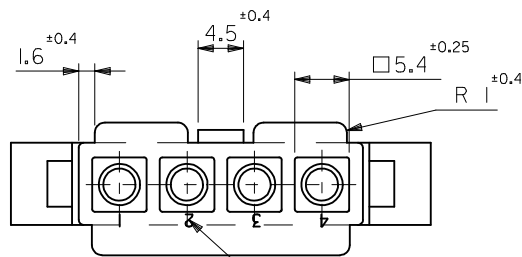

サーキット番号
CIRCUIT NO.



パネル取付耳
MTG. EARS

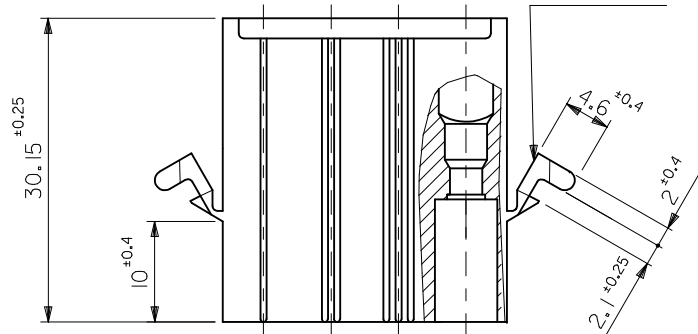

キャビティー番号
CAVITY NO.


製品番号
ENG. NO.

トレードマーク
TRADE MARK

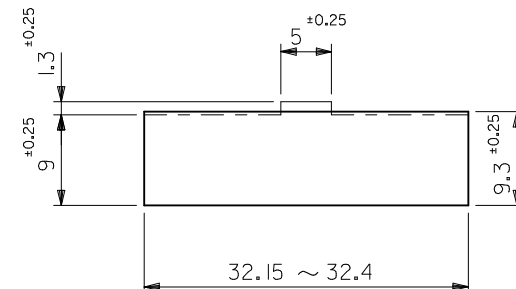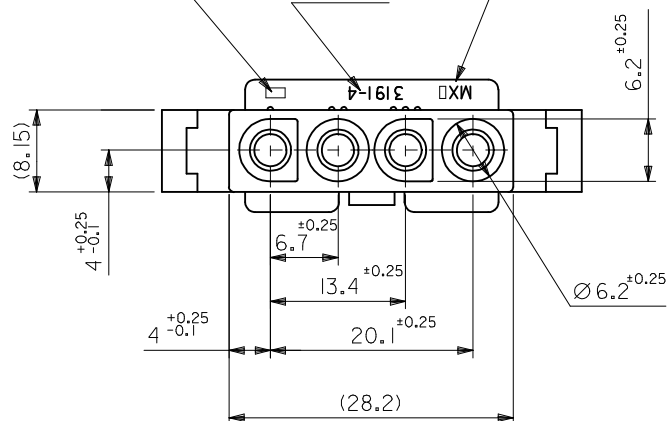

パネル取付穴推奨寸法 (厚さ2.0最大)

ハウジングの装着はパネル穴打抜き方向より行うこと
RECOMMENDED PANEL HOLE DIMENSION (THK. 2.0 MAX.)
ATTACH THE HOUSING FROM THE DIRECTION OF
PANEL HOLE PUNCHED OUT.

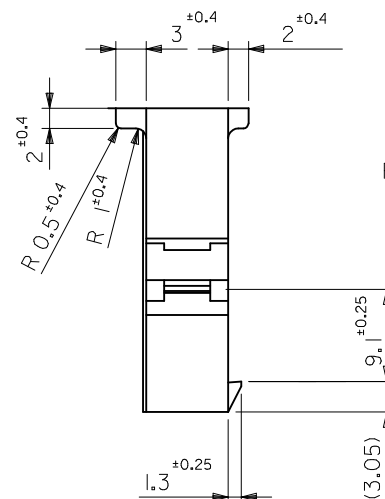

注記
NOTE

() 内寸法は参考値
DIMENSIONS IN () ARE REFERENCE

39-03-6041	3191-04P-201	NYLON66	94V-0
39-03-6040	3191-04P	NYLON66	94V-2
POLYBAG PACKAGE	モデル番号 MODEL No.	材質 MATERIAL	UL
オーダー番号 ORDER NO.			

REVISED EC NO: J2013-0829 DRWN:SSAT002 CHKD:KASAKAWA APPR:Y0110	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
		10 UNDER	± ---	DRAWN BY H.IIJIMA	DATE '96/06/24	TITLE 4 CKT. PLUG HS'G. (.093 DIA. TERMINAL)		
		10 OVER 30 UNDER	± ---	CHECKED BY M.FUKUSHIMA	DATE '96/06/24			
		30 OVER	± ---	APPROVED BY M.ENOMOTO	DATE '96/06/24			
		ANGULAR ± --- °		MATERIAL NO.		DOCUMENT NO.		
	REV	L	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-3191-005	
			SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

9 8 7 6 5 4 3 2