


EAO – Your Expert Partner for
Human Machine Interfaces



EAO Product Information

Series 17

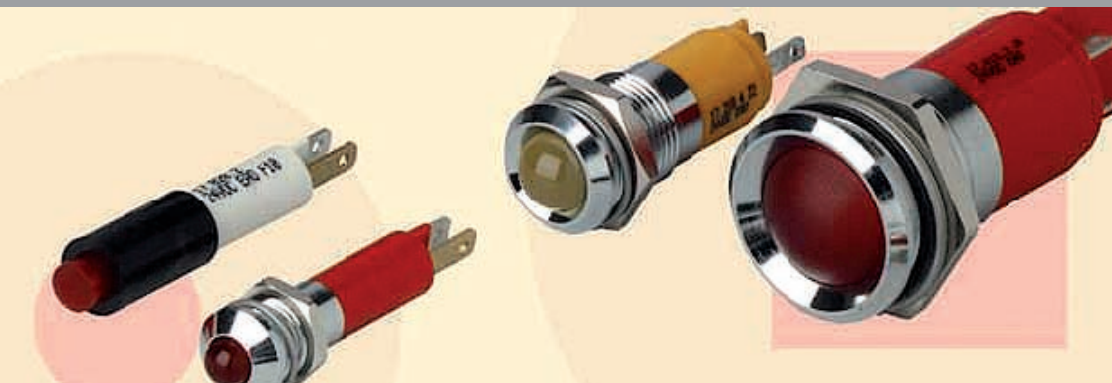

Description 3

Product Assembly 4

Devices raised mounting 5

Accessories..... 11

Technical Data..... 12

Drawings..... 13

Index..... 16

Product Information

General notes

The LED indicators are fitted with an integrated series resistor so that additional wiring can be dispensed with.

The different front versions, such as:

- internal/external reflector
- flat front
- satin-chrome or black-chrome
- optical lens

allow them to be used in most frequent applications.

Mounting

Mounted from the front through cut out.

The indicators are secured to the panel by means of a fixing nut and washer.

Terminals

Connection is through plug-in terminals 2.0 x 0.5 mm or 2.8 x 0.8 mm.

The anode (+) and cathode (-) are marked at the rear.

*We reserve the right to modify technical data
All dimensions in mm*

Indicator, raised mounting



- 1 Indicator
- 2 Fixing nut

Indicator 6 mm dia., LED 3 mm



	Front protection	Reflector	Light colour	Lumi. Intensity	Operating voltage/-current	Terminals	Ø 7 mm Typ-Nr.	Technical drawing	
Indicator 6 mm dia., LED 3 mm	IP 40	Metal satin-chrome exterior	green	6	24 VDC, 15 mA	PT	17-020351	1	0.003
			red	8	24 VDC, 15 mA	PT	17-020350	1	0.003
			white	410	24 VDC, 15 mA	PT	17-02035W	1	0.003
			yellow	6	24 VDC, 15 mA	PT	17-020352	1	0.003
		Metal satin-chrome flush	green	6	24 VDC, 15 mA	PT	17-000351	1	0.003
			red	8	24 VDC, 15 mA	PT	17-000350	1	0.003
			yellow	6	24 VDC, 15 mA	PT	17-000352	1	0.003
		Metal satin-chrome interior	blue	26	24 VDC, 15 mA	PT	17-030357	1	0.003
			green	6	24 VDC, 15 mA	PT	17-030351	1	0.003
			green/yellow	30/15	24 VDC, 15 mA	PT	17-030356	1	0.003
			red	8	24 VDC, 15 mA	PT	17-030350	1	0.003
			white	410	24 VDC, 15 mA	PT	17-03035W	1	0.003
			yellow	6	24 VDC, 15 mA	PT	17-030352	1	0.003

Terminals: PT = Plug-in terminal

Technical drawing from page 13

Indicator 8 mm dia., LED 5 mm



	Front protection	Reflector	Light colour	Lumi. Intensity	Operating voltage/-current	Terminals	Ø 9.5 mm Typ-Nr.	Technical drawing	
Indicator 8 mm dia., LED 5 mm	IP 67	Metal black-chrome exterior	blue	60 mcd	24 VDC, 20 mA	PT	17-041357	2	0.005
			green	32 mcd	24 VDC, 20 mA	PT	17-041351	2	0.005
			red	80 mcd	24 VDC, 20 mA	PT	17-041350	2	0.005
			yellow	32 mcd	24 VDC, 20 mA	PT	17-041352	2	0.005
		Metal black-chrome interior	blue	60 mcd	24 VDC, 20 mA	PT	17-051357	2	0.005
			green	32 mcd	24 VDC, 20 mA	PT	17-051351	2	0.005
			red	80 mcd	24 VDC, 20 mA	PT	17-051350	2	0.005
			yellow	32 mcd	24 VDC, 20 mA	PT	17-051352	2	0.005
		Metal satin-chrome exterior	blue	57 mcd	24 VAC, 19 mA	PT	17-040367	2	0.005
				60 mcd	24 VDC, 20 mA	PT	17-040357	2	0.005
			green	30 mcd	24 VAC, 19 mA	PT	17-040361	2	0.005
				32 mcd	24 VDC, 20 mA	PT	17-040351	2	0.005
			green/yellow	20/15 mcd	24 VDC, 22 mA	PT	17-120356	3	0.005
				76 mcd	24 VAC, 19 mA	PT	17-040360	2	0.005
			red	80 mcd	24 VDC, 20 mA	PT	17-040350	2	0.005
				11/30 mcd	24 VDC, 22 mA	PT	17-120354	3	0.005
			red/green	10/11 mcd	24 VDC, 22 mA	PT	17-120355	3	0.005
				30 mcd	24 VAC, 19 mA	PT	17-040362	2	0.005
			red/yellow	32 mcd	24 VDC, 20 mA	PT	17-040352	2	0.005
				8 mcd	24 VDC, 20 mA	PT	17-010351	2	0.005
		Metal satin-chrome flat	red	13 mcd	24 VDC, 20 mA	PT	17-010350	2	0.005
			red/green/yellow	3/3/6 mcd	24 VDC, 15/15/30 mA	PT	17-100354	3	0.005
			yellow	8 mcd	24 VDC, 20 mA	PT	17-010352	2	0.005
				57 mcd	24 VAC, 19 mA	PT	17-050367	2	0.005
		Metal satin-chrome interior	blue	60 mcd	24 VDC, 20 mA	PT	17-050357	2	0.005
				32 mcd	24 VDC, 20 mA	PT	17-050351	2	0.005
			green	20/15 mcd	24 VDC, 22 mA	PT	17-130356	3	0.005
				76 mcd	24 VAC, 19 mA	PT	17-050360	2	0.005
			red	80 mcd	24 VDC, 20 mA	PT	17-050350	2	0.005
				11/30 mcd	24 VDC, 22 mA	PT	17-130354	3	0.005
			red/green	10/11 mcd	24 VDC, 22 mA	PT	17-130355	3	0.005
				30 mcd	24 VAC, 19 mA	PT	17-050362	2	0.005
			red/yellow	32 mcd	24 VDC, 20 mA	PT	17-050352	2	0.005
				600 mcd	24 VAC/DC, 9/17 mA	PT	17-080357	2	0.005
Sunlight visibility Light reduction of around 25 % by use of AC	IP 67	Metal satin-chrome exterior	green	1300 mcd	24 VAC/DC, 9/17 mA	PT	17-080355	2	0.005
			red	1200 mcd	24 VAC/DC, 9/17 mA	PT	17-080350	2	0.005
			white	1000 mcd	24 VAC/DC, 9/17 mA	PT	17-08035W	2	0.005
			yellow	1100 mcd	24 VAC/DC, 9/17 mA	PT	17-080352	2	0.005
				600 mcd	24 VAC/DC, 9/17 mA	PT	17-090357	2	0.005
		Metal satin-chrome interior	green	1300 mcd	24 VAC/DC, 9/17 mA	PT	17-090355	2	0.005
			red	1200 mcd	24 VAC/DC, 9/17 mA	PT	17-090350	2	0.005
			white	1000 mcd	24 VAC/DC, 9/17 mA	PT	17-09035W	2	0.005
			yellow	1100 mcd	24 VAC/DC, 9/17 mA	PT	17-090352	2	0.005
				600 mcd	24 VAC/DC, 9/17 mA	PT	17-090357	2	0.005
			green	1300 mcd	24 VAC/DC, 9/17 mA	PT	17-090355	2	0.005
			red	1200 mcd	24 VAC/DC, 9/17 mA	PT	17-090350	2	0.005

Continuation see next page

Continued from previous page

	Front protection	Reflector	Light colour	Lumi. Intensity	Operating voltage/-current	Terminals	Ø 9.5 mm Typ-Nr.	Technical drawing	
with protection tube	IP 67	Metal satin-chrome exterior	green	5 mcd	230 VAC, 3 mA	PT	17-510431	9	0.006
			red	22 mcd	230 VAC, 3 mA	PT	17-510430	9	0.006
			yellow	7 mcd	230 VAC, 3 mA	PT	17-510432	9	0.006
		Metal satin-chrome interior	green	5 mcd	230 VAC, 3 mA	PT	17-500431	9	0.005
			red	22 mcd	230 VAC, 3 mA	PT	17-500430	9	0.005
			yellow	7 mcd	230 VAC, 3 mA	PT	17-500432	9	0.005

Terminals: PT = Plug-in terminal

Technical drawing from page 13

Indicator 8 mm dia., LED 5 mm, flush mounted

The mounting is performed by cementing the LED Indicator using a solvent free two element epoxy-based adhesive



	Front protection	Light colour	Lumi. Intensity	Operating voltage/-current	Terminals	Ø 8 mm Typ-Nr.	Technical drawing	
Indicator 8 mm dia., LED 5 mm, flush mounted	IP 40	green	10 mcd	24 VDC, 22 mA	PT	17-590351	6	0.002
		red	11 mcd	24 VDC, 22 mA	PT	17-590350	6	0.002
		yellow	9 mcd	24 VDC, 22 mA	PT	17-590352	6	0.002
Tri-colour LED	IP 40	red/green/yellow	3/3/6 mcd	24 VDC, 15/15/30 mA	PT	17-590354	6	0.002

Operation modes (tri-colour LED): Red, green or yellow. Both diodes produce yellow as a mixed colour.

Terminals: PT = Plug-in terminal

Technical drawing from page 13

Indicator 14 mm dia., LED 10 mm



	Front protection	Reflector	Lumi. Intensity	Light colour	Operating voltage/-current	Terminals	Ø 16 mm Typ-Nr.	Technical drawing	
Indicator 14 mm dia., LED 10 mm	IP 67	Metal black-chrome interior-exterior	150 mcd	red	24 VDC, 20 mA	PT	17-211350	4	0.014
			70 mcd	green	24 VDC, 20 mA	PT	17-211351	4	0.014
				yellow	24 VDC, 20 mA	PT	17-211352	4	0.014
		Metal satin-chrome interior-exterior	150 mcd	red	24 VDC, 20 mA	PT	17-210350	4	0.014
			70 mcd	green	24 VDC, 20 mA	PT	17-210351	4	0.014
				yellow	24 VDC, 20 mA	PT	17-210352	4	0.014
flashing	IP 67	Metal black-chrome interior-exterior	100 mcd	red	24 VDC, 38 ... 56 mA	PT	17-221350	4	0.014
			70 mcd	green	24 VDC, 38 ... 56 mA	PT	17-221351	4	0.014
				yellow	24 VDC, 38 ... 56 mA	PT	17-221352	4	0.014
		Metal satin-chrome interior-exterior	100 mcd	red	24 VDC, 38 ... 56 mA	PT	17-220350	4	0.014
			70 mcd	green	24 VDC, 38 ... 56 mA	PT	17-220351	4	0.014
				yellow	24 VDC, 38 ... 56 mA	PT	17-220352	4	0.014
Sunlight visibility Light reduction of around 25 % by use of AC	IP 67	Metal satin-chrome interior-exterior	1000 mcd	yellow	24 VAC/DC, 9/17 mA	PT	17-2A0352	4	0.014
			1250 mcd	green	24 VAC/DC, 9/17 mA	PT	17-2A0355	4	0.014
			1350 mcd	white	24 VAC/DC, 9/17 mA	PT	17-2A035W	4	0.014
			500 mcd	blue	24 VAC/DC, 9/17 mA	PT	17-2A0357	4	0.014
			700 mcd	red	24 VAC/DC, 9/17 mA	PT	17-2A0350	4	0.014
Tri-colour LED	IP 67	Metal satin-chrome interior-exterior	90/60/150 mcd	red/green/yellow	24 VDC, 20/20/20 mA	PT	17-240354	4	0.014
with protection tube	IP 67	Metal black-chrome interior-exterior	11 mcd	green	230 VAC, 3 mA	PT	17-351231	5	0.015
			18 mcd	red	230 VAC, 3 mA	PT	17-351230	5	0.015
			8 mcd	yellow	230 VAC, 3 mA	PT	17-351233	5	0.015
		Metal satin-chrome interior-exterior	11 mcd	green	230 VAC, 3 mA	PT	17-350231	5	0.015
			18 mcd	red	230 VAC, 3 mA	PT	17-350230	5	0.015
			8 mcd	yellow	230 VAC, 3 mA	PT	17-350233	5	0.015

Terminals: PT = Plug-in terminal
Technical drawing from page 13

Indicator 16 mm dia., LED 10 mm



	Front protection	Lense	Reflector	Light colour	Lumi. Intensity	Operating voltage/-current	Terminals	Ø 18.3 mm Typ-Nr.	Technical drawing	
Indicator 16 mm dia., LED 10 mm	IP 67	conical	Plastic black	blue	860 mcd	24 VDC, 14 mA	PT	17-391357Z	10	0.007
						28 VDC, 14 mA	PT	17-391457Z	10	0.007
				green	820 mcd	24 VDC, 15 mA	PT	17-391351Z	10	0.007
						28 VDC, 15 mA	PT	17-391451Z	10	0.007
				red	1470 mcd	24 VDC, 16 mA	PT	17-391350Z	10	0.007
						28 VDC, 16 mA	PT	17-391450Z	10	0.007
				ultra-green	5030 mcd	24 VDC, 14 mA	PT	17-391355Z	10	0.007
						28 VDC, 14 mA	PT	17-391455Z	10	0.007
				white	2760 mcd	24 VDC, 14 mA	PT	17-39135WZ	10	0.007
						28 VDC, 14 mA	PT	17-39145WZ	10	0.007
				yellow	1640 mcd	24 VDC, 16 mA	PT	17-391352Z	10	0.007
						28 VDC, 16 mA	PT	17-391452Z	10	0.007
		convex	Plastic black	blue	860 mcd	24 VDC, 14 mA	PT	17-371357Z	10	0.007
						28 VDC, 14 mA	PT	17-371457Z	10	0.007
				green	980 mcd	24 VDC, 15 mA	PT	17-371351Z	10	0.007
						28 VDC, 15 mA	PT	17-371451Z	10	0.007
				red	1200 mcd	24 VDC, 16 mA	PT	17-371350Z	10	0.007
						28 VDC, 16 mA	PT	17-371450Z	10	0.007
				ultra-green	5440 mcd	24 VDC, 14 mA	PT	17-371355Z	10	0.007
						28 VDC, 14 mA	PT	17-371455Z	10	0.007
				white	2460 mcd	24 VDC, 14 mA	PT	17-37135WZ	10	0.007
						28 VDC, 14 mA	PT	17-37145WZ	10	0.007
				yellow	1650 mcd	24 VDC, 16 mA	PT	17-371352Z	10	0.007
						28 VDC, 16 mA	PT	17-371452Z	10	0.007
		flush	Plastic black	blue	740 mcd	24 VDC, 14 mA	PT	17-381357Z	10	0.007
						28 VDC, 14 mA	PT	17-381457Z	10	0.007
				green	870 mcd	24 VDC, 15 mA	PT	17-381351Z	10	0.007
						28 VDC, 15 mA	PT	17-381451Z	10	0.007
				red	870 mcd	24 VDC, 16 mA	PT	17-381350Z	10	0.007
						28 VDC, 16 mA	PT	17-381450Z	10	0.007
				ultra-green	4130 mcd	24 VDC, 14 mA	PT	17-381355Z	10	0.007
						28 VDC, 14 mA	PT	17-381455Z	10	0.007
				white	1290 mcd	24 VDC, 14 mA	PT	17-38135WZ	10	0.007
						28 VDC, 14 mA	PT	17-38145WZ	10	0.007
				yellow	1250 mcd	24 VDC, 16 mA	PT	17-381352Z	10	0.007
						28 VDC, 16 mA	PT	17-381452Z	10	0.007

Continuation see next page

Continued from previous page

	Front protection	Lense	Reflector	Light colour	Lumi. Intensity	Operating voltage/-current	Terminals	Ø 18.3 mm Typ-Nr.	Technical drawing	
with protection tube	IP 67	conical	Plastic black	blue	200 mcd	230 VAC, 3 mA	PT	17-421237Z	11	0.008
				green	120 mcd	230 VAC, 3 mA	PT	17-421231Z	11	0.008
				red	240 mcd	230 VAC, 3 mA	PT	17-421230Z	11	0.008
				ultra-green	1280 mcd	230 VAC, 3 mA	PT	17-421235Z	11	0.008
				white	500 mcd	230 VAC, 3 mA	PT	17-42123WZ	11	0.008
				yellow	190 mcd	230 VAC, 3 mA	PT	17-421232Z	11	0.008
		convex	Plastic black	blue	200 mcd	230 VAC, 3 mA	PT	17-401237Z	11	0.008
				green	150 mcd	230 VAC, 3 mA	PT	17-401231Z	11	0.008
				red	240 mcd	230 VAC, 3 mA	PT	17-401230Z	11	0.008
				ultra-green	1560 mcd	230 VAC, 3 mA	PT	17-401235Z	11	0.008
				white	350 mcd	230 VAC, 3 mA	PT	17-40123WZ	11	0.008
				yellow	210 mcd	230 VAC, 3 mA	PT	17-401232Z	11	0.008
	flush	Plastic black	Plastic black	blue	150 mcd	230 VAC, 3 mA	PT	17-411237Z	11	0.008
				green	120 mcd	230 VAC, 3 mA	PT	17-411231Z	11	0.008
				red	140 mcd	230 VAC, 3 mA	PT	17-411230Z	11	0.008
				ultra-green	970 mcd	230 VAC, 3 mA	PT	17-411235Z	11	0.008
				white	280 mcd	230 VAC, 3 mA	PT	17-41123WZ	11	0.008
				yellow	130 mcd	230 VAC, 3 mA	PT	17-411232Z	11	0.008

Terminals: PT = Plug-in terminal

Technical drawing from page 13

Indicator 22 mm dia., LED 15 mm



	Front protection	Reflector	Light colour	Lumi. Intensity	Operating voltage/-current	Terminals	Ø 25 mm Typ-Nr.	Technical drawing	
Indicator 22 mm dia., LED 15 mm	IP 67	Metal black-chrome interior-exterior	green	120 mcd	24 VDC, 19 mA	PT	17-531351	7	0.042
			red	160 mcd	24 VDC, 19 mA	PT	17-531350	7	0.042
			red/yellow/green	51/92/120 mcd	24 VDC, 26/24/50 mA	PT	17-541354	7	0.042
			yellow	350 mcd	24 VDC, 19 mA	PT	17-531352	7	0.042
		Metal satin-chrome interior-exterior	green	120 mcd	24 VDC, 19 mA	PT	17-530351	7	0.042
			red	160 mcd	24 VDC, 19 mA	PT	17-530350	7	0.042
			red/yellow/green	51/92/120 mcd	24 VDC, 26/24/50 mA	PT	17-540354	7	0.042
			yellow	350 mcd	24 VDC, 19 mA	PT	17-530352	7	0.042
with protection tube	IP 67	Metal black-chrome interior-exterior	green	20 mcd	230 VAC, 4 mA	PT	17-571231	8	0.044
			red	28 mcd	230 VAC, 4 mA	PT	17-571230	8	0.044
			yellow	48 mcd	230 VAC, 4 mA	PT	17-571232	8	0.044
		Metal satin-chrome interior-exterior	green	20 mcd	230 VAC, 4 mA	PT	17-570231	8	0.044
			red	28 mcd	230 VAC, 4 mA	PT	17-570230	8	0.044
			yellow	48 mcd	230 VAC, 4 mA	PT	17-570232	8	0.044

Terminals: PT = Plug-in terminal

Technical drawing from page 13

Backside

Flat receptacle

	Typ-Nr.	
Flat receptacle 2.0 x 0.5 mm	31-945	0.001
2.8 x 0.8 mm	84-9420	0.001



Insulation sleeve

	Typ-Nr.	
Insulation sleeve for Flat receptacle 31-945	31-928	0.001
for Flat receptacles 84-9420	31-929	0.001



Assembling

Fixing nut long

	Typ-Nr.	
Fixing nut long Ø 9/M8 x 13 mm	19-991	0.001



Mounting tool

	Typ-Nr.	
Mounting tool for Fixing nut long 19-991	19-905	0.011
for Indicator 16 mm dia.	01-907	0.020



Technical Data

Material

Actuator

Reflector: Brass satin chrome/black chrome
for indicator 16 mm dia. in black plastic
The plastic (polycarbonate) is limited resistant against chemicals

Mechanical characteristics

Terminals

Plug-in terminal 2.0 x 0.5 mm or 2.8 x 0.8 mm
The indicators with tab-connection are not qualified for soldering

Tightening torque

20 Ncm

Electrical characteristics

Polarity

Anode(+) Brass plug-in connector
Cathode(-) Brass tinned plug-in connector

Voltage tolerance

+10 %

Optical characteristics

Wave length

red 660 nm
super red 625 nm
hyper red 660 nm
orange 625 nm / for execution 230 V: 610 nm
green 565 nm
yellow/green 570 / for execution 230 V: 575 nm
yellow 590 nm
blue 475 nm

red/green 660/565 nm
red/yellow 660/ 590 nm

Environmental conditions

Storage temperature

-25 °C ... +80 °C

Service temperature

-20 °C ... +60 °C

Protection degree

front IP 40
IP 67 as per DIN EN 60529 - Gap between LED and reflector and
gap between reflector and frontplate sealed to IP 67 when using the
supplied gasket


Approvals

Approbations

UL
VDE

Technical drawing


1 Indicator 6 mm dia., LED 3 mm page 5

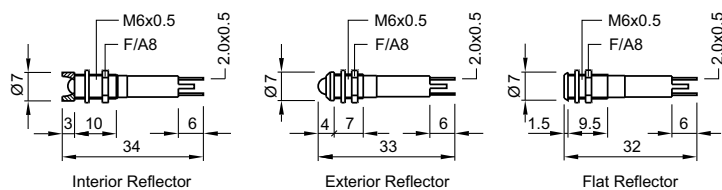

Mounting hole: 6 mm dia. +0.2/0 mm

Connectors: Brass terminal = Anode / Brass tinned terminal = Cathode


2 Indicator 8 mm dia., LED 5 mm page 6

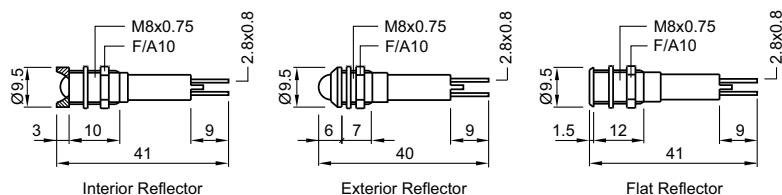

Mounting hole: 8 mm dia. +0.2/0 mm

Connectors: Brass terminal = Anode / Brass tinned terminal = Cathode


3 Indicator 8 mm dia., LED 5 mm page 6

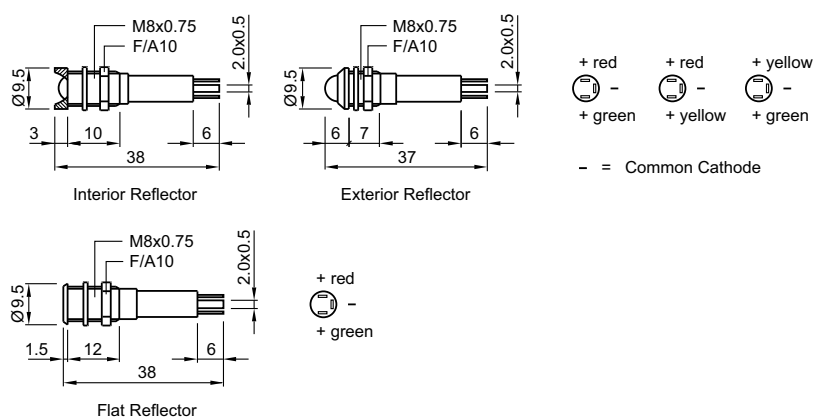

Mounting hole: 8 mm dia. +0.2/0 mm

Connectors: Brass terminal = Anode / Brass tinned terminal = Cathode


4 Indicator 14 mm dia., LED 10 mm page 8

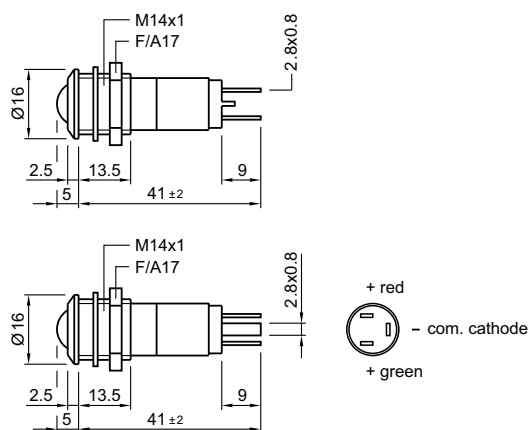

Mounting hole: 14 mm dia. +0.2/0 mm

Connectors: Brass terminal = Anode / Brass tinned terminal = Cathode


5 Indicator 14 mm dia., LED 10 mm page 8

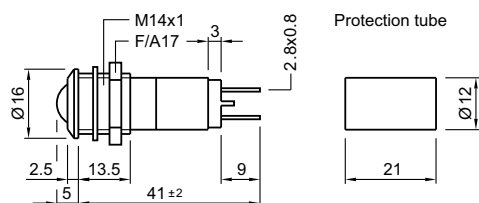

Mounting hole: 14 mm dia. +0.2/0 mm

Connectors: Brass terminal = Anode / Brass tinned terminal = Cathode


6 Indicator 8 mm dia., LED 5 mm, flush mounted page 7

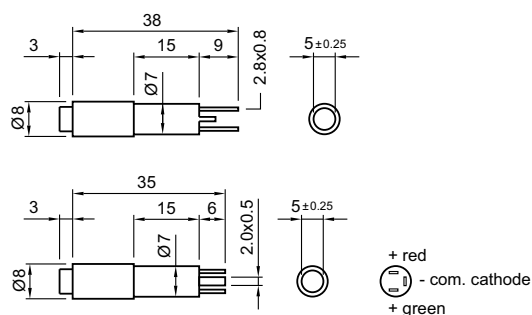

Mounting hole: 5 mm dia. +0.2/0 mm

Connectors: Brass terminal = Anode / Brass tinned terminal = Cathode


7 Indicator 22 mm dia., LED 15 mm page 10

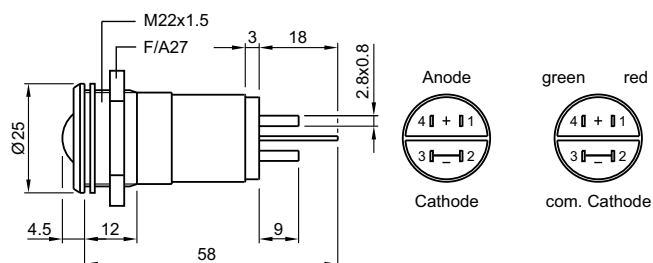

Mounting hole: 22 mm dia. +0.5/0 mm

Connectors: Brass terminal = Anode / Brass tinned terminal = Cathode


8 Indicator 22 mm dia., LED 15 mm page 10

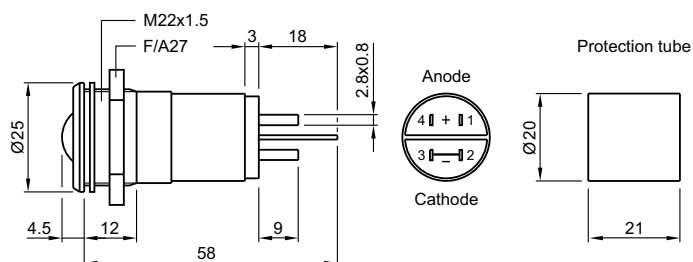

Mounting hole: 22 mm dia. +0.5/0 mm

Connectors: Brass terminal = Anode / Brass tinned terminal = Cathode


9 Indicator 8 mm dia., LED 5 mm page 6

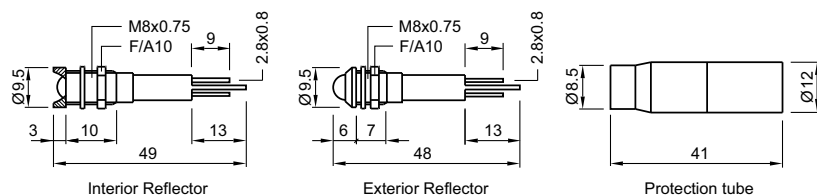

Mounting hole: 8 mm dia. +0.2/0 mm

Connectors: Brass terminal = Anode / Brass tinned terminal = Cathode

10 Indicator 16 mm dia., LED 10 mm page 9

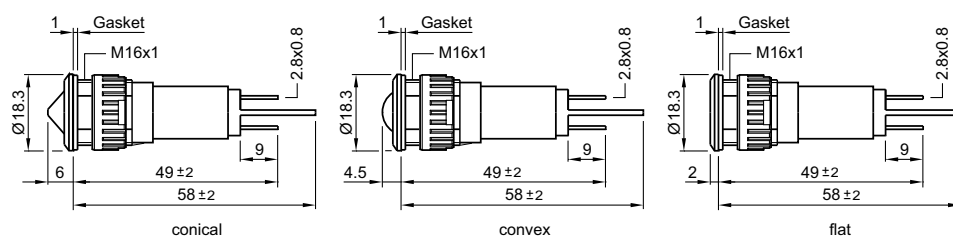


Mounting hole: 16 mm dia. +0.4/0 mm

Connectors: Brass terminal = Anode / Brass tinned terminal = Cathode

Maximum panel thickness 6 mm

11 Indicator 16 mm dia., LED 10 mm page 9

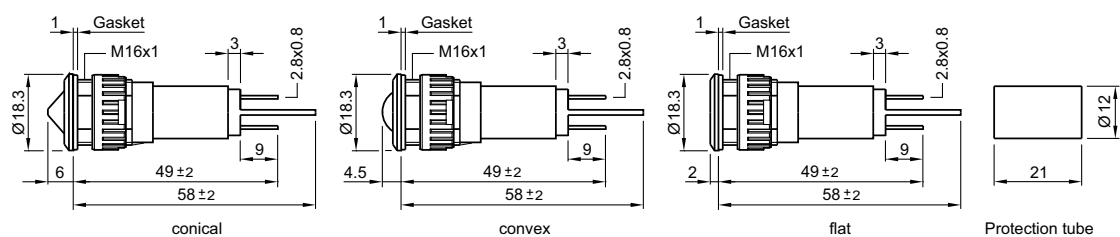

Mounting hole: 16 mm dia. +0.4/0 mm

Connectors: Brass terminal = Anode / Brass tinned terminal = Cathode

Maximum panel thickness 6 mm

Index from Typ-Nr.

Typ-Nr.	Page	Typ-Nr.	Page	Typ-Nr.	Page
01-907	11	17-220350	8	17-411235Z	10
17-000350	5	17-220351	8	17-411237Z	10
17-000351	5	17-220352	8	17-41123WZ	10
17-000352	5	17-221350	8	17-421230Z	10
17-010350	6	17-221351	8	17-421231Z	10
17-010351	6	17-221352	8	17-421232Z	10
17-010352	6	17-240354	8	17-421235Z	10
17-020350	5	17-2A0350	8	17-421237Z	10
17-020351	5	17-2A0352	8	17-42123WZ	10
17-020352	5	17-2A0355	8	17-500430	7
17-02035W	5	17-2A0357	8	17-500431	7
17-030350	5	17-2A035W	8	17-500432	7
17-030351	5	17-350230	8	17-510430	7
17-030352	5	17-350231	8	17-510431	7
17-030356	5	17-350233	8	17-510432	7
17-030357	5	17-351230	8	17-530350	10
17-03035W	5	17-351231	8	17-530351	10
17-040350	6	17-351233	8	17-530352	10
17-040351	6	17-371350Z	9	17-531350	10
17-040352	6	17-371351Z	9	17-531351	10
17-040357	6	17-371352Z	9	17-531352	10
17-040360	6	17-371355Z	9	17-540354	10
17-040361	6	17-371357Z	9	17-541354	10
17-040362	6	17-37135WZ	9	17-570230	10
17-040367	6	17-371450Z	9	17-570231	10
17-041350	6	17-371451Z	9	17-570232	10
17-041351	6	17-371452Z	9	17-571230	10
17-041352	6	17-371455Z	9	17-571231	10
17-041357	6	17-371457Z	9	17-571232	10
17-050350	6	17-37145WZ	9	17-590350	7
17-050351	6	17-381350Z	9	17-590351	7
17-050352	6	17-381351Z	9	17-590352	7
17-050357	6	17-381352Z	9	17-590354	7
17-050360	6	17-381355Z	9	19-905	11
17-050362	6	17-381357Z	9	19-991	11
17-050367	6	17-38135WZ	9	31-928	11
17-051350	6	17-381450Z	9	31-929	11
17-051351	6	17-381451Z	9	31-945	11
17-051352	6	17-381452Z	9	84-9420	11
17-051357	6	17-381455Z	9		
17-080350	6	17-381457Z	9		
17-080352	6	17-38145WZ	9		
17-080355	6	17-391350Z	9		
17-080357	6	17-391351Z	9		
17-08035W	6	17-391352Z	9		
17-090350	6	17-391355Z	9		
17-090352	6	17-391357Z	9		
17-090355	6	17-39135WZ	9		
17-090357	6	17-391450Z	9		
17-09035W	6	17-391451Z	9		
17-100354	6	17-391452Z	9		
17-120354	6	17-391455Z	9		
17-120355	6	17-391457Z	9		
17-120356	6	17-39145WZ	9		
17-130354	6	17-401230Z	10		
17-130355	6	17-401231Z	10		
17-130356	6	17-401232Z	10		
17-210350	8	17-401235Z	10		
17-210351	8	17-401237Z	10		
17-210352	8	17-40123WZ	10		
17-211350	8	17-411230Z	10		
17-211351	8	17-411231Z	10		
17-211352	8	17-411232Z	10		

	EAO AG
	Tannwaldstrasse 88
	4601 Olten, Switzerland
E-mail	info@eao.com
Website	www.eao.com
	Austria
Phone	+49 201 85 87 0
Fax	+49 201 85 87 210
E-mail	sales.ede@eao.com
	Belgium
Phone	+32 3 777 82 36
Fax	+32 3 777 84 19
E-mail	sales.ebl@eao.com
	China
Phone	+852 27 86 91 41
Fax	+852 27 86 95 61
E-mail	sales.ehk@eao.com
	France
Phone	+33 1 64 43 37 37
Fax	+33 1 64 43 37 49
E-mail	sales.esa@eao.com
	Germany
Phone	+49 201 85 87 0
Fax	+49 201 85 87 210
E-mail	sales.ede@eao.com
	Italy
Phone	+39 035 481 0189
Fax	+39 035 481 3786
E-mail	sales.eit@eao.com
	Japan
Phone	+81 3 5444 5411
Fax	+81 3 5444 0345
E-mail	sales.esj@eao.com
	Netherlands
Phone	+31 78 653 17 00
Fax	+31 78 653 17 99
E-mail	sales.enl@eao.com
	Sweden
Phone	+46 8 683 86 60
Fax	+46 8 724 29 12
E-mail	sales.esw@eao.com
	Switzerland
Phone	+41 62 388 95 00
Fax	+41 62 388 95 55
E-mail	sales.ech@eao.com
	United Kingdom
Phone	+44 1444 236 000
Fax	+44 1444 236 641
E-mail	sales.euk@eao.com
	USA
Phone	+1 203 877 4577
Fax	+1 203 877 3694
E-mail	sales.eus@eao.com
	Other Countries
Phone	+41 62 286 92 10
Fax	+41 62 296 21 62
E-mail	info@eao.com