

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
V7-2H15D8-000-2

CW-B3521

CATALOG LISTING
V7-2H15D8-000-2

REPLACES

RELEASE NO. PR-17817

CATALOG LISTING

M

ISSUE
6

CHECK

REVISIONS

A	CO-69800	BAB	13 MAR 91
B	CO-72840	JWB	12 JAN 93
C	CO-76101	KDR	04 OCT 93
D	CO-76897	DCS	23 FEB 94
E	CO-77197	DCS	10 MAY 94

CHECK

DCS 7 DEC 89


DCS

CHECK

TJA 5 DEC 89

DRAWN

DDM/CAD

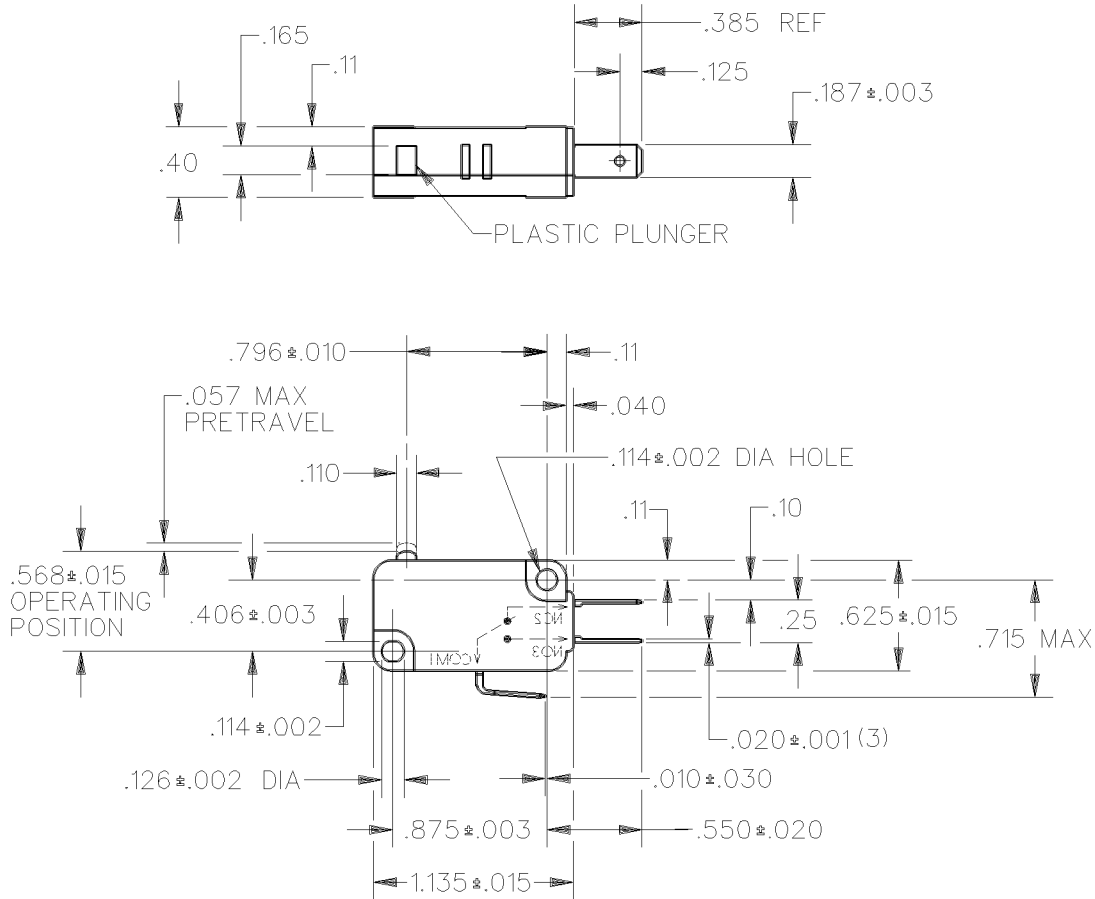

NOTE

- 1 - SWITCH WILL OPERATE AND RELEASE WITHIN FULL EXCURSION OF THE PLUNGER
- 2 - SWITCHES TO BE BULK PACKED 1000 PER BAG, 1 BAG PER BOX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE	FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 75 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
RELEASE FORCE — — — 10 GRAMS MIN		ONE PLACE	(.0)	±.030
DIFFERENTIAL TRAVEL — — — .002-.010		TWO PLACE	(.00)	±.015
OVERTRAVEL — — — — .040 MIN		THREE PLACE	(.000)	±.005
FREE POSITION — — — — .625 MAX		ANGLES		±
RELEASE TRAVEL — — — — .010 MIN		WEIGHT		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[V7-2H15D8-000-2](#)