

4

3

2

1

D

D

C




C

B

B

A

A

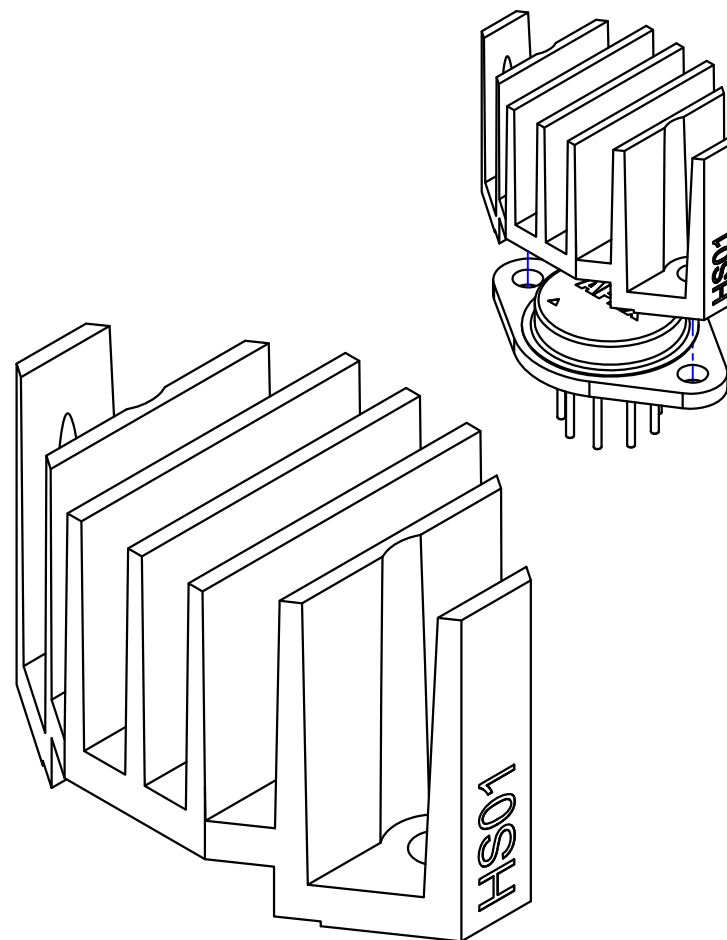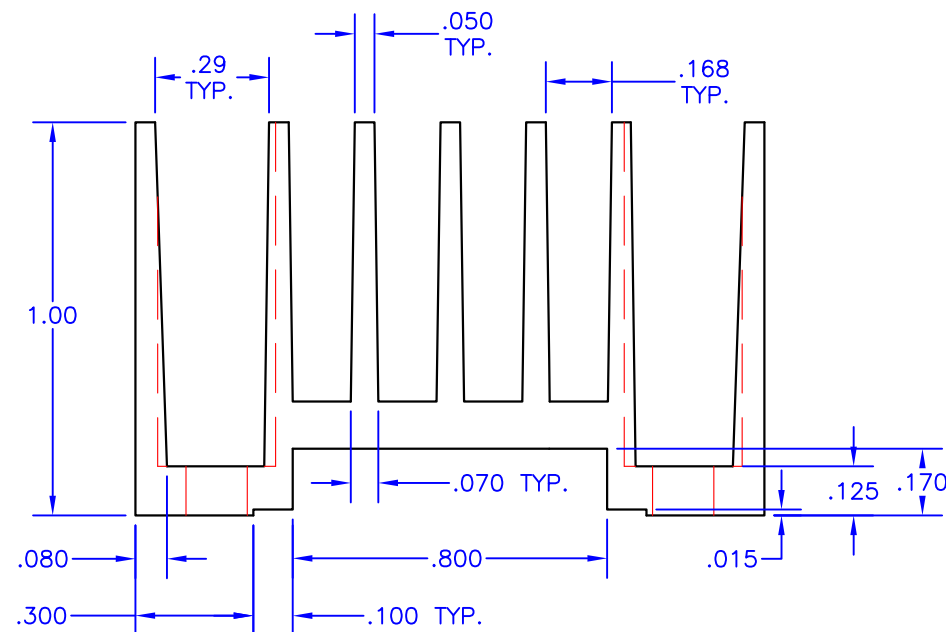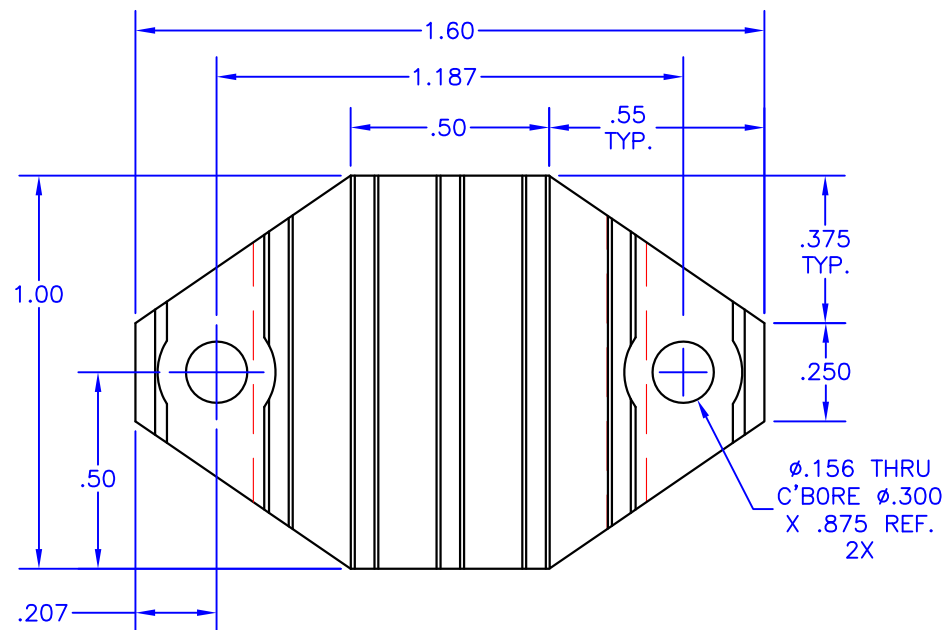

NOTES:

1. Unless otherwise noted, all dimensions are in inches.
2. Break all sharp edges, de-burr & remove loose chips.
3. Material: Aluminum (M/F AAVID Thermalloy NP971944)
4. Finish: Anodize per MIL-A-8625, Type II, Class 2, Black
Typical breakdown voltage > 300V
5. Mark with contrasting ink as shown, if specified by P.O.
6. Approximate Weight: 0.6 oz [17g]
7. Thermal rating 11.6 °C/W

TOLERANCES - UNLESS OTHERWISE SPECIFIED

.XX = $\pm .01$ [.254]

.XXX = $\pm .005$ [.127]

ANG. = $\pm 5^\circ$



TITLE:

HEATSINK, TO-3

SUBJECT:

MECHANICAL DRAWING

ENGINEER:

D-M

RMOR

DCA:

13356

S/L

OF

1 1

MODEL:

HS01

FILENAME:

HS01

REV:

J

DATE:

14OCT13

4

3

2

1