
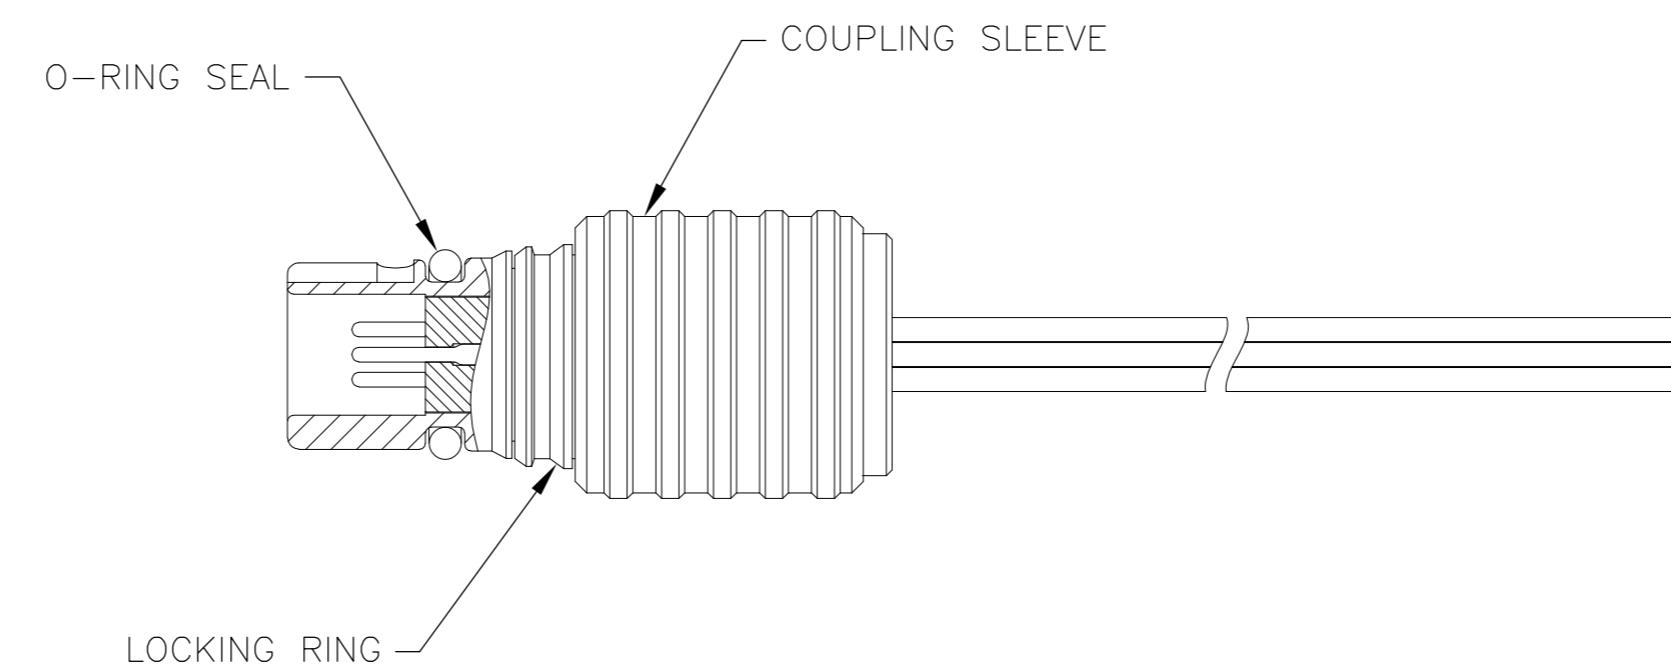
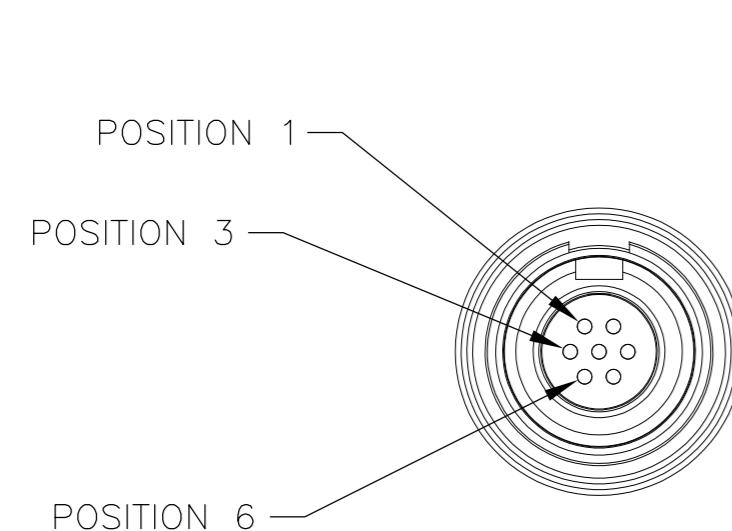
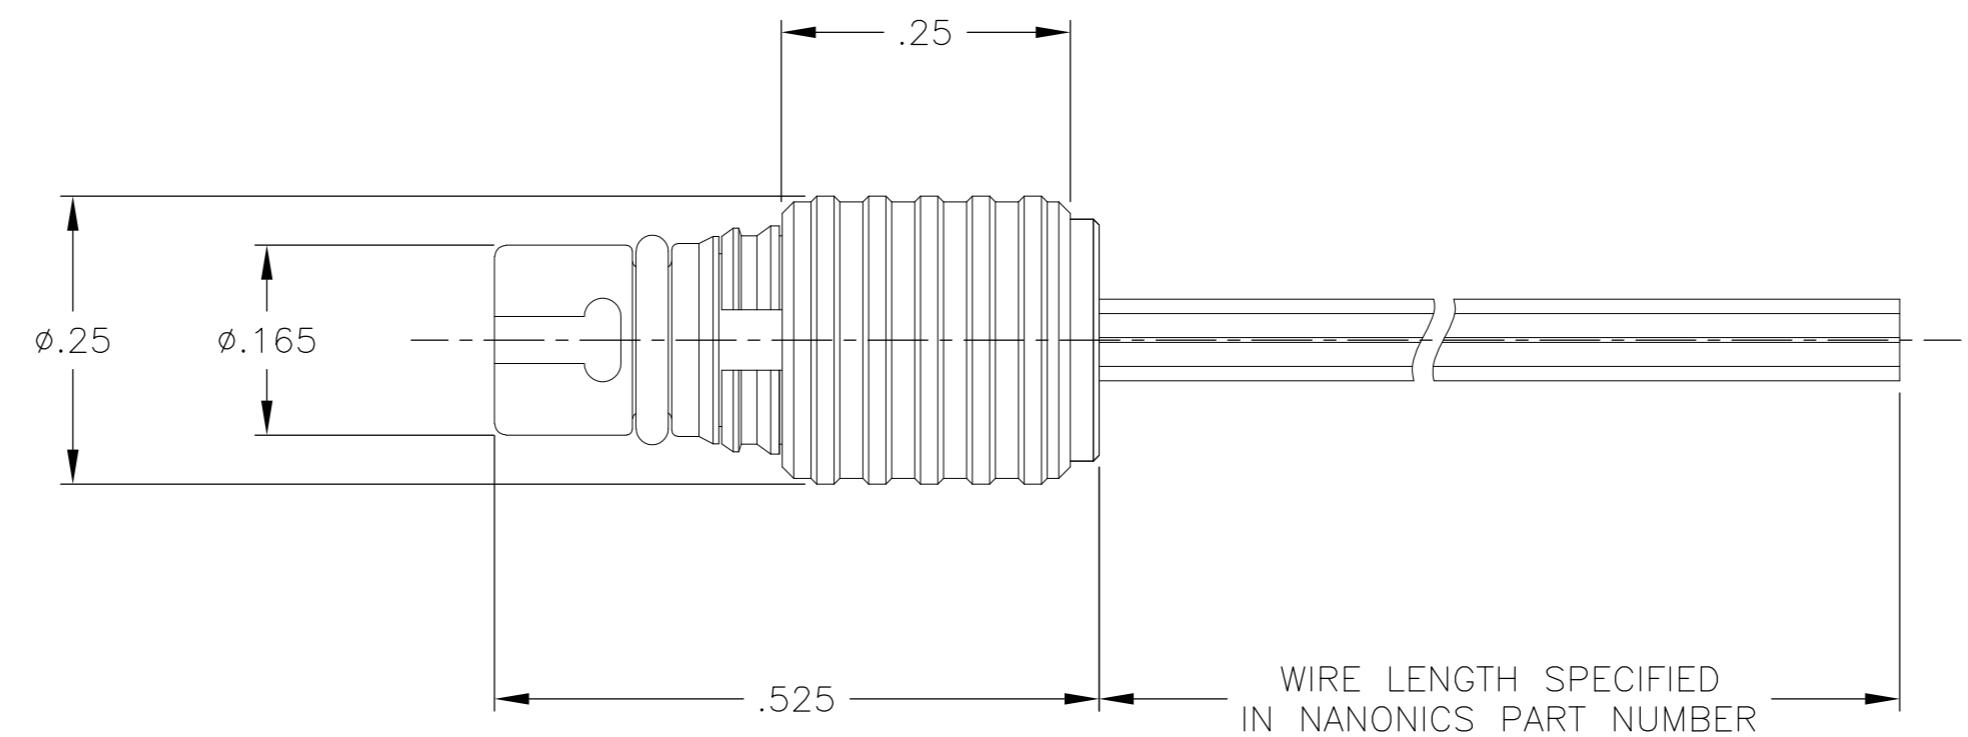


THIS DRAWING IS UNPUBLISHED.  
 RELEASED FOR PUBLICATION  
 - - -  
 © COPYRIGHT - By -  
 ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				APVD
		P	LTR	DESCRIPTION	DATE	
	G	UPDATE PER ECO-11-013056			23 JUN 11	CAS MKS

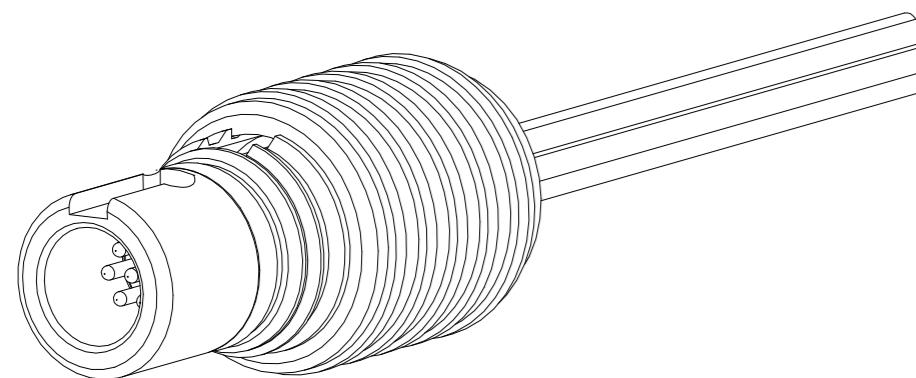

1 CONNECTOR BODY AND COUPLING SLEEVE MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E  
 LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E  
 INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067  
 O-RING MATERIAL: FLUOROSILICONE

2 WIRE TERMINATION: 28 AWG SOLID, 30 AWG STRANDED WIRE OR SMALLER

3 LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION

4 THIS DRAWING ALSO IDENTIFIED AS NANONICS 303-0023

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
INCHES	
0 PLC	$\pm$ -
1 PLC	$\pm$ -
2 PLC	$\pm$ .010
3 PLC	$\pm$ .005
4 PLC	$\pm$ -
ANGLES	$\pm$ 1°
MATERIAL	FINISH
SEE NOTES	SEE NOTES

**TE** TE Connectivity  
 PLUG ASSEMBLY,  
 CIRCULAR, QUICK DISCONNECT,  
 METAL, 7 POSITION  
 SIZE CAGE CODE DRAWING NO. RESTRICTED TO  
 A2 OJPN9 C-1589055  
 CUSTOMER DRAWING  
 SCALE 6:1 SHEET 1 OF 1 REV G

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[QCM007PC2DC006](#)