


Features

- Schottky Barrier Chip
- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High Efficiency
- High Surge Capability
- High Current Capability and Low Forward Voltage Drop
- Surge Overload Rating to 250A Peak
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications
- **Lead Free Finish/RoHS Compliant Version (Note 3)**

Mechanical Data

- Case: D²PAK
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Finish - Bright Tin. Solderable per MIL-STD-202, Method 208
- Ordering Information, Page 2
- Polarity: See Diagram
- Marking: Type Number
- Mounting Position: Any
- Weight: 1.7 grams (approximate)

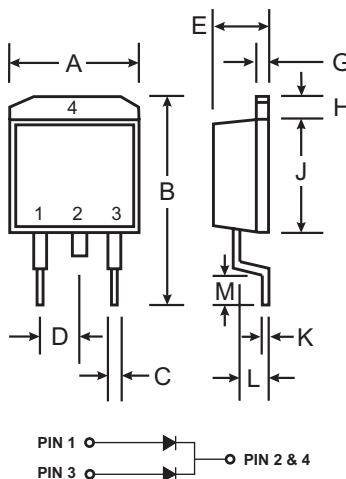


D ² PAK		
Dim	Min	Max
A	9.65	10.69
B	14.60	15.88
C	0.51	1.14
D	2.29	2.79
E	4.37	4.83
G	1.14	1.40
H	1.14	1.40
J	8.25	9.25
K	0.30	0.64
L	2.03	2.92
M	2.29	2.79
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics @ T_A = 25°C unless otherwise specified


Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

Characteristic	Symbol	SBG 3030CT	SBG 3040CT	SBG 3045CT	SBG 3050CT	SBG 3060CT	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	30	40	45	50	60	V
RMS Reverse Voltage	$V_{R(RMS)}$	21	28	32	35	42	V
Average Rectified Output Current @ $T_C = 100^{\circ}C$	I_O	30					A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	250					A
Forward Voltage, per Element @ $I_F = 15A, T_C = 25^{\circ}C$	V_{FM}	0.55			0.70		V
Peak Reverse Current @ $T_C = 25^{\circ}C$ at Rated DC Blocking Voltage @ $T_C = 100^{\circ}C$	I_{RM}	1.0 75					mA
Typical Junction Capacitance (Note 2)	C_j	420					pF
Typical Thermal Resistance Junction to Case (Note 1)	$R_{\theta JC}$	1.5					K/W
Operating and Storage Temperature Range	T_j, T_{STG}	-65 to +150					$^{\circ}C$


- Notes:
1. Thermal resistance: junction to case mounted on heat sink.
 2. Measured at 1.0MHz and Applied Reverse Voltage of 4.0V DC.
 3. RoHS revision 13.2.2003. Glass and High Temperature Solder Exemptions Applied, see *EU Directive Annex Notes 5 and 7*.

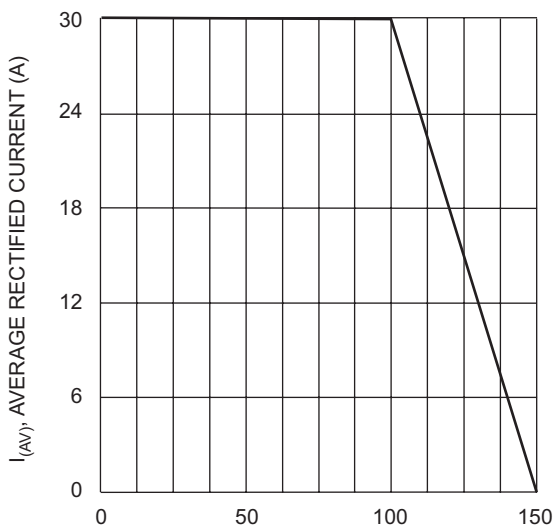


T_C , CASE TEMPERATURE (°C)
Fig. 1 Forward Derating Curve

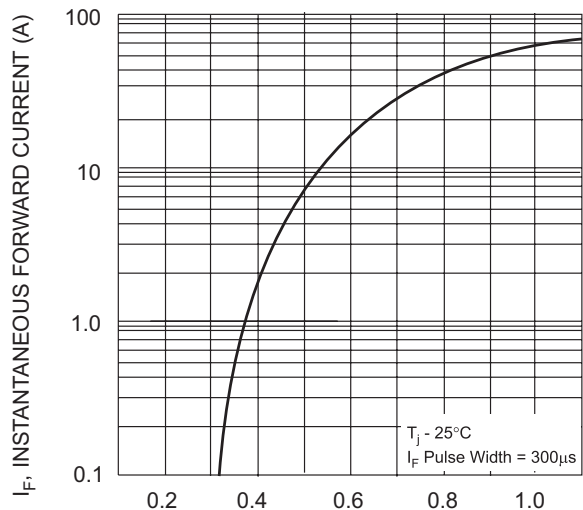

V_F , INSTANTANEOUS FORWARD VOLTAGE (V)
Fig. 2 Typical Forward Characteristics

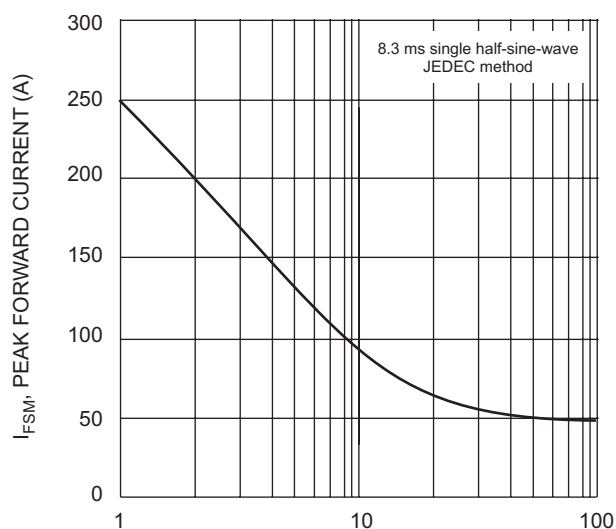

NUMBER OF CYCLES AT 60Hz
Fig. 3 Maximum Non-Repetitive Surge Current

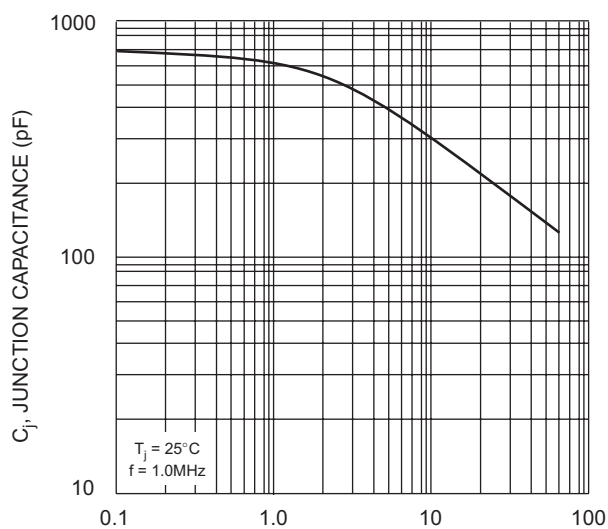

V_R , REVERSE VOLTAGE (V)
Fig. 4 Typical Junction Capacitance

Ordering Information (Note 4)

Device	Packaging	Shipping
SBG3030CT-T-F	D ² PAK	800/Tape & Reel, 13-inch
SBG3040CT-T-F	D ² PAK	800/Tape & Reel, 13-inch
SBG3045CT-T-F	D ² PAK	800/Tape & Reel, 13-inch
SBG3050CT-T-F	D ² PAK	800/Tape & Reel, 13-inch
SBG3060CT-T-F	D ² PAK	800/Tape & Reel, 13-inch

Notes: 4. For packaging details, visit our website at <http://www.diodes.com/datasheets/ap02007.pdf>.