

General specifications

Layout



- The NO and NC circuits must both be of the same polarity.

Components

Material


- Case : glass filled polyamide
- Contacts : silver
- Terminals: copper-nickel

Actuator

- Plain : stainless steel
- roller: nylon

Accessories : stainless steel

Operating curve



**Approvals** UL (E42016), CSA (LR - 20918) for others, please consult us.

Types

Features

Electrical characteristics

|                             |         |   |
|-----------------------------|---------|---|
| Current rating at 125-250 V | Nominal | A |
|                             | Thermal | A |

Mechanical characteristics

|                         |            |
|-------------------------|------------|
| Operating force - max.  | N (oz)     |
| Release force min.      | N (oz)     |
| Overtravel max. - force | N (oz)     |
| Maximum rest position   | mm (in)    |
| Tripping point          | mm (in)    |
| Movement differential   | mm (in)    |
| Overtravel - min.       | mm (in)    |
| Operating temperature   | °C (°F)    |
| Mechanical life         | Operations |
| Contact gap             | mm (in)    |
| Weight                  | g (oz)     |

Contact Type

C (Form C) SPDT-DB

Connections

- 83 132 : solder connection -1- only
- 83 133 : solder connection -1- only
- 83 134 : printed circuit board -2- only

Actuators and mounting positions-Factory Mounted Only

Part numbers for standard actuators

Actuators-Length mm (in)

|                       |         |
|-----------------------|---------|
| Tripping point        | mm (in) |
| Operating force max.  | N (oz)  |
| Release force min.    | N (oz)  |
| Pre-travel - max.     | mm (in) |
| Movement differential | mm (in) |
| Total travel max.     | mm (in) |

Part numbers for standard actuators

Actuators-Length mm (in)

|                        |         |
|------------------------|---------|
| Tripping point         | mm (in) |
| Operating force - max. | N (oz)  |
| Release force - min.   | N (oz)  |
| Pre-travel - max.      | mm (in) |
| Movement differential  | mm (in) |
| Total travel max.      | mm (in) |

Other information

Also available: 1) Bi-stable operation  
2) NC or NO contacts  
3) Custom Actuators  
Please consult us for other actuators.

Normally stocked items

Catalog products produced to order

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



| 1                                           |                                             |                                               |  |
|---------------------------------------------|---------------------------------------------|-----------------------------------------------|--|
| 83 132 0                                    | 83 133 0                                    | 83 134 0                                      |  |
| Side terminals                              | Base terminals                              | Face terminals                                |  |
| 5                                           | 5                                           | 5                                             |  |
| 11                                          | 11                                          | 11                                            |  |
| 1.6 (5.6)                                   | 1.6 (5.6)                                   | 1.6 (5.6)                                     |  |
| 0.4 (1.4)                                   | 0.4 (1.4)                                   | 0.4 (1.4)                                     |  |
| 10 (35.3)                                   | 10 (35.3)                                   | 10 (35.3)                                     |  |
| 8.45 (.33)                                  | 8.45 (.33)                                  | 8.10 (.32)                                    |  |
| 7.7 <sup>+0.2</sup> (.30 <sup>-.008</sup> ) | 7.7 <sup>+0.2</sup> (.30 <sup>-.008</sup> ) | 7.35 <sup>+0.25</sup> (.29 <sup>-.010</sup> ) |  |
| 0.45 (.018)                                 | 0.45 (.018)                                 | 0.45 (.018)                                   |  |
| 0.3 (.012)                                  | 0.3 (.012)                                  | 0.3 (.012)                                    |  |
| -20 +125 (-4 to +257)                       | -20 +125 (-4 to +257)                       | -20 +125 (-4 to +257)                         |  |
| 10 <sup>7</sup>                             | 10 <sup>7</sup>                             | 10 <sup>7</sup>                               |  |
| 0.3 x 2 (.012 x 2)                          | 0.3 x 2 (.012 x 2)                          | 0.3 x 2 (.012 x 2)                            |  |
| 1.8 (.06)                                   | 1.8 (.06)                                   | 1.8 (.06)                                     |  |
| 2                                           |                                             |                                               |  |
| C                                           | C                                           | C                                             |  |
| 3                                           |                                             |                                               |  |



1 solder tags can accept quick connects .11" x .02"



2 for printed circuit boards

| 4                                             |                                               |                                               |                                               |
|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|
| L 70 514 175                                  | C 70 514 194                                  | E 70 514 181                                  | F 70 514 182                                  |
| Flat 54A R14.75 (.58)                         | Flat 54A R35.75 (1.41)                        | Tip-mounted in-line roller 54E R7.5 (.3)      | Tip-mounted in-line roller 54E R14.1 (.56)    |
|                                               |                                               |                                               |                                               |
| 83 132 0                                      | 83 132 0                                      | 83 132 0                                      | 83 132 0                                      |
| 83 133 0                                      | 83 133 0                                      | 83 133 0                                      | 83 133 0                                      |
| 83 134 0                                      | 83 134 0                                      | 83 134 0                                      | 83 134 0                                      |
| 9.5 <sup>+0.8</sup> (.374 <sup>+.031</sup> )  | 10 <sup>+1.5</sup> (.413 <sup>+.06</sup> )    | 14.2 <sup>+0.3</sup> (.56 <sup>+.02</sup> )   | 15.5 <sup>+0.8</sup> (.61 <sup>+.031</sup> )  |
| 9.2 <sup>+0.8</sup> (.362 <sup>+.031</sup> )  | 9.7 <sup>+0.15</sup> (.382 <sup>+.031</sup> ) | 13.9 <sup>+0.3</sup> (.547 <sup>+.031</sup> ) | 15.2 <sup>+0.8</sup> (.6 <sup>+.031</sup> )   |
| 0.18 (.6)                                     | 0.34 (1.2)                                    | 1.6 (5.6)                                     | 0.8 (2.8)                                     |
| 0.16 (.5)                                     | 0.06 (.2)                                     | 0.32 (1.1)                                    | 0.17 (.6)                                     |
| 2.15 (.085)                                   | 5.15 (.203)                                   | 1.1 (.043)                                    | 2.05 (.081)                                   |
| 1 <sup>+0.3</sup> (.04 <sup>+.001</sup> )     | 2.1 <sup>+0.65</sup> (.083 <sup>+.026</sup> ) | 0.5 <sup>+0.15</sup> (.02 <sup>+.006</sup> )  | 0.95 <sup>+0.3</sup> (.037 <sup>+.001</sup> ) |
| 2.8 (.11)                                     | 6.8 (.268)                                    | 1.45 (.057)                                   | 2.7 (.106)                                    |
| B 70 514 559                                  | A 70 514 131                                  | G 70 514 183                                  |                                               |
| Simulated Roller 54B R13.7 (.54)              | Flat 54A R7.75 (.30)                          | Tip-mounted in-line roller 54E R34.4 (1.35)   |                                               |
|                                               |                                               |                                               |                                               |
| 83 132 0                                      | 83 132 0                                      | 83 132 0                                      |                                               |
| 83 133 0                                      | 83 133 0                                      | 83 133 0                                      |                                               |
| 83 134 0                                      | 83 134 0                                      | 83 134 0                                      |                                               |
| 12.7 <sup>+0.8</sup> (.5 <sup>+.031</sup> )   | 8.2 <sup>+0.3</sup> (.32 <sup>+.01</sup> )    | 16.1 <sup>+1.4</sup> (.63 <sup>+.05</sup> )   |                                               |
| 12.4 <sup>+0.8</sup> (.49 <sup>+.031</sup> )  | 7.9 <sup>+0.3</sup> (.31 <sup>+.031</sup> )   | 15.8 <sup>+1.4</sup> (.62 <sup>+.05</sup> )   |                                               |
| 0.85 (3)                                      | 1.55 (5.45)                                   | 0.34 (1.19)                                   |                                               |
| 0.18 (.6)                                     | 0.3 (1.05)                                    | 0.07 (.25)                                    |                                               |
| 2.05 (.081)                                   | 1.1 (.04)                                     | 4.9 (1.9)                                     |                                               |
| 0.95 <sup>+0.3</sup> (.037 <sup>+.001</sup> ) | .5 <sup>+0.15</sup> (.02 <sup>+.006</sup> )   | 2 <sup>+0.6</sup> (.08 <sup>+.02</sup> )      |                                               |
| 2.7 (.106)                                    | 1.5 (.06)                                     | 6.6 (.26)                                     |                                               |

Except where otherwise indicated, the actuator is mounted in the position shown in the dimensional drawings (= standard mounting).

To order please specify :

1

Switch Type  
831320  
831330  
831340

2

Contact Type  
C

3

Connection  
1  
2

Example : 831330 C 1 A L

4

Actuators  
A  
B  
C  
E

5

Actuator Position  
L - Left (Standard)  
R - Right


Example P/N is 831330, SPDT-DB, solder terminals, A actuator mounted on the left.

Products and specifications subject to change without notice.


# Subminiature Switches

## Dimensions


83 132 0

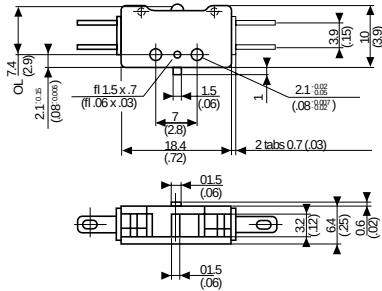

83 133 0




83 134 0

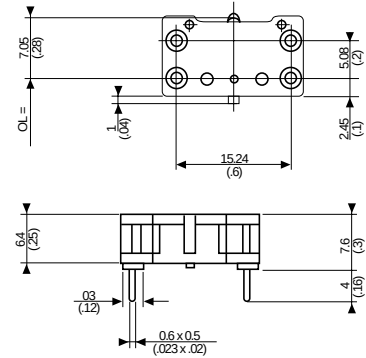


mm(in)

## Connections

1

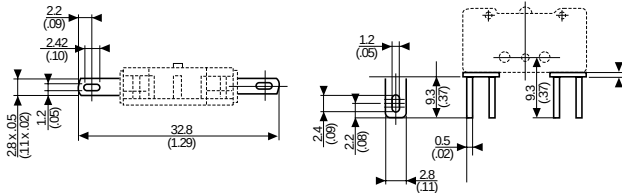

2

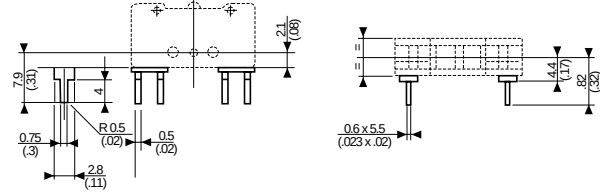

mm(in)




## Actuators

### Standard mounting

|            |                |
|------------|----------------|
| A 70514131 | R=7.75 (.30)   |
| L 70514175 | R=14.75 (.58)  |
| C 70514194 | R=35.75 (1.41) |

|            |              |
|------------|--------------|
| B 70514559 | R=13.7 (.54) |
|------------|--------------|

|            |               |
|------------|---------------|
| E 70514181 | R=7.5 (.3)    |
| F 70514182 | R=14.1 (.56)  |
| G 70514183 | R=34.4 (1.35) |

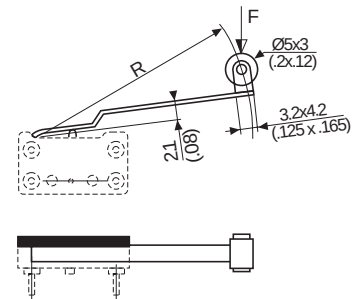


mm(in)

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Actuators and mounting positions – Factory Mounted Only – for Gang Operation

Part numbers for standard actuators – Consult factory for part number


| Actuators-Length      | mm (in) | 2 pole <b>54A2</b> R30 (1.18)                                                     | 3 pole <b>54A3</b> R30 (1.18)                                                     | Side mounting plate (0.4 mm) <b>54Y</b>                                             |
|-----------------------|---------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                       |         |  |  |  |
|                       |         | <b>83 132 0</b>                                                                   | <b>83 132 0</b>                                                                   |                                                                                     |
|                       |         | <b>83 133 0</b>                                                                   | <b>83 133 0</b>                                                                   |                                                                                     |
|                       |         | <b>*83 134 0</b>                                                                  | <b>*83 134 0</b>                                                                  |                                                                                     |
| Tripping Point        | mm (in) | 8.8 <sup>+0.8</sup> (.346 <sup>+0.03</sup> )                                      | 8.8 <sup>+0.8</sup> (.346 <sup>+0.03</sup> )                                      |                                                                                     |
| Operating Force max   | N (oz)  | 0.8 (2.8)                                                                         | 1.2 (4.2)                                                                         |                                                                                     |
| Release Force min     | N (oz)  | 0.16 (.6)                                                                         | 0.24 (.8)                                                                         |                                                                                     |
| Pre-travel min        | mm (in) | 4.3 (.17)                                                                         | 4.3 (.17)                                                                         |                                                                                     |
| Movement differential | mm (in) | 2 <sup>+0.55</sup> (.08 <sup>+0.02</sup> )                                        | 2 <sup>+0.55</sup> (.08 <sup>+0.02</sup> )                                        |                                                                                     |
| Total travel max      | mm (in) | 5.75 (.23)                                                                        | 5.75 (.23)                                                                        |                                                                                     |

Delivered separately


\*For gang operation with 83 132 0 or 83 133 0.

## Actuators – For Gang Operation

**54A2**




**54A3**




mm(in)

## Mounting accessories

**83 132 0 - 83 133 0**



**83 134 0**



mm(in)

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

General specifications

Layout




Components

Material


- Case : polyester UL 94 VO
  - Button : glass-filled polyamide
  - Contacts : AgNi, gold-plated AgNi (dual-current)
  - Terminals : copper-nickel
- Actuators**
- flat : stainless steel
  - roller : stainless steel with polyamide roller

Approvals: NF - UL - cUL


Operating curve  
For type 83 170 0

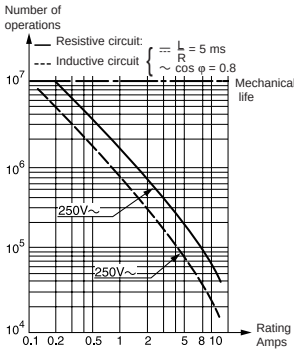

For type 83 170 4

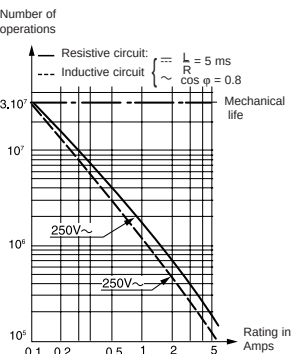

For type 83 170 9

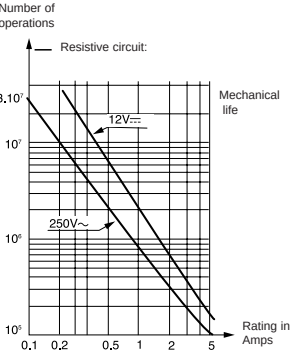

Model 83 170 9 is designed to operate equally well on dual-current (1 mA 4 V minimum) or medium-current (5 A maximum) circuits. However, a given product should only be used to switch one type of circuit during its working life.

Types

|                                                             |   |
|-------------------------------------------------------------|---|
| Part numbers for standard products (no lever) terminal type | 1 |
|                                                             | 2 |
|                                                             | 3 |

Features

Electrical characteristics

|                         |         |   |
|-------------------------|---------|---|
| Current rating at 250 V | Nominal | A |
|                         | Thermal | A |

Mechanical characteristics

|                                   |            |
|-----------------------------------|------------|
| Operating force - max.            | N (oz.)    |
| Release force - min.              | N (oz.)    |
| Total travel force - max.         | N (oz.)    |
| Permitted overtravel force - max. | N (oz.)    |
| Maximum rest position             | mm (in.)   |
| Tripping point                    | mm (in.)   |
| Differential travel               | mm (in.)   |
| Overtravel - min.                 | mm (in.)   |
| Ambient operating temperature     | °C         |
| Mechanical endurance              | Operations |
| Contact gap                       | mm (in.)   |
| Weight                            | g (oz.)    |

Contact type

- C (Form C) SPDT
- B (Form B) SPNC not available in PC terminals
- A (Form A) SPNO not available in PC terminals

Connections

Actuators and mounting positions

Part numbers for standard actuators

|                    |          |
|--------------------|----------|
| Actuators – Length | mm (in.) |
|--------------------|----------|

Mounting positions

|                |          |
|----------------|----------|
| Coefficient    |          |
| Tripping point | mm (in.) |

Mounting positions

Except where otherwise indicated, actuators are supplied unmounted. For factory mounting, specify mounting position L or R.

- To calculate force : take the force quoted for the switch and divide by the coefficient given in the table.
- To calculate travel : take the travel quoted for the switch and multiply by the same coefficient.

Mounting accessories for PCB mounting: 5 / 6 / 7 / 8

See page 3/9.

Other information


For other forces, actuators, connections and temperatures, please consult us.

Normally stocked items

Catalog products produced to order

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com

**1**

| 83170.0                                                                                                                                                                                                      | 83170.4                                                                                                                                                                                                        | 83170.9                                                                                                                                                                                                        | 83170.4 SP 4967                                                                                                                                                                                                | 83170.4                                                                                                                                                                                                        | 83170.9                                                                                                                                                                                                        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 831700C1.0                                                                                                                                                                                                   | 831704C1.0                                                                                                                                                                                                     | 831709C1.0                                                                                                                                                                                                     | 831704C2.MBSP                                                                                                                                                                                                  | 831704C1.MB                                                                                                                                                                                                    | 831709C1.MB                                                                                                                                                                                                    |
| 831700C2.0                                                                                                                                                                                                   | 831704C2.0                                                                                                                                                                                                     | 831709C2.0                                                                                                                                                                                                     | 831704C3.MBSP                                                                                                                                                                                                  | 831704C2.MB                                                                                                                                                                                                    | 831709C2.MB                                                                                                                                                                                                    |
| 831700C3.0                                                                                                                                                                                                   | 831704C3.0                                                                                                                                                                                                     | 831709C3.0                                                                                                                                                                                                     | 831704C1.MBSP                                                                                                                                                                                                  | 831704C3.MB                                                                                                                                                                                                    | 831709C3.MB                                                                                                                                                                                                    |
| High current                                                                                                                                                                                                 | Standard                                                                                                                                                                                                       | Low current                                                                                                                                                                                                    | High force                                                                                                                                                                                                     | Standard                                                                                                                                                                                                       | Low current                                                                                                                                                                                                    |
| 10<br>12.5                                                                                                                                                                                                   | 5<br>6                                                                                                                                                                                                         | 0.1                                                                                                                                                                                                            | 5<br>6                                                                                                                                                                                                         | 5<br>6                                                                                                                                                                                                         | 0.1                                                                                                                                                                                                            |
| 1.5 (5.3)<br>0.3 (1)<br>1.8 (6.3)<br>10 (35.3)<br>9.2 (.36)<br>8.4 <sup>+0.3</sup> (.33 <sup>+0.1</sup> )<br>0.15 (.006)<br>0.5 (.02)<br>-20 to130 (-4 to 266)<br>10 <sup>7</sup><br>0.4 (.016)<br>1.7 (.06) | 0.6 (2.2)<br>0.1 (.04)<br>1 (3.5)<br>10 (35.3)<br>9.2 (.36)<br>8.4 <sup>+0.3</sup> (.33 <sup>+0.1</sup> )<br>0.15 (.006)<br>0.5 (.02)<br>-20 to130 (-4 to 266)<br>3.10 <sup>7</sup><br>0.4 (.016)<br>1.7 (.06) | 0.6 (2.2)<br>0.1 (.04)<br>1 (3.5)<br>10 (35.3)<br>9.2 (.36)<br>8.4 <sup>+0.3</sup> (.33 <sup>+0.1</sup> )<br>0.15 (.006)<br>0.5 (.02)<br>-20 to130 (-4 to 266)<br>3.10 <sup>7</sup><br>0.4 (.016)<br>1.7 (.06) | 1.5 (5.3)<br>0.3 (1)<br>1.8 (6.3)<br>10 (35.3)<br>10.8 (.425)<br>9.9 <sup>+0.3</sup> (.39 <sup>+0.1</sup> )<br>0.15 (.006)<br>0.5 (.02)<br>-20 to130 (-4 to 266)<br>10 <sup>6</sup><br>0.4 (.016)<br>1.7 (.06) | 0.6 (2.2)<br>0.1 (.04)<br>1 (3.5)<br>10 (35.3)<br>10.8 (.425)<br>9.9 <sup>+0.3</sup> (.39 <sup>+0.1</sup> )<br>0.15 (.006)<br>0.5 (.02)<br>-20 to130 (-4 to 266)<br>10 <sup>6</sup><br>0.4 (.016)<br>1.7 (.06) | 0.6 (2.2)<br>0.1 (.04)<br>1 (3.5)<br>10 (35.3)<br>10.8 (.425)<br>9.9 <sup>+0.3</sup> (.39 <sup>+0.1</sup> )<br>0.15 (.006)<br>0.5 (.02)<br>-20 to130 (-4 to 266)<br>10 <sup>6</sup><br>0.4 (.016)<br>1.7 (.06) |



**2**

| C | C | C | C | C | C |
|---|---|---|---|---|---|
| B | B | B | B | B | B |
| A | A | A | A | A | A |

**3****4**


| A 79 253 327                                        | B 79 253 326                                       | C 79 253 328                                         | E 79 218 454                                         | F 79 253 329                                       |
|-----------------------------------------------------|----------------------------------------------------|------------------------------------------------------|------------------------------------------------------|----------------------------------------------------|
| Flat 170A R18.3 (.72)                               | Flat 170A R24 (.94)                                | Flat 170A R41 (1.61)                                 | Roller 170E R20 (.79)                                | Dummy roller 170F R19.5 (.77)                      |
|                                                     |                                                    |                                                      |                                                      |                                                    |
| L 3<br>10.4 <sup>±1.2</sup> (.41 <sup>±.05</sup> )  | L 4<br>11.1 <sup>±1.2</sup> (.44 <sup>±.05</sup> ) | L 7<br>13.2 <sup>±2.5</sup> (.52 <sup>±.1</sup> )    | L 3<br>15.4 <sup>±1.2</sup> (.61 <sup>±.05</sup> )   | L 3<br>13 <sup>±1.2</sup> (.51 <sup>±.05</sup> )   |
| R 1.5<br>9.2 <sup>±0.6</sup> (.36 <sup>±.24</sup> ) | R 2<br>9.6 <sup>±0.6</sup> (.38 <sup>±.24</sup> )  | R 3.5<br>10.7 <sup>±1.2</sup> (.42 <sup>±.05</sup> ) | R 1.5<br>14.5 <sup>±0.6</sup> (.57 <sup>±.24</sup> ) | R 1.5<br>12 <sup>±0.6</sup> (.47 <sup>±.24</sup> ) |

| D 79 218 491         | L 79 218 493                     |
|----------------------|----------------------------------|
| Screw 170D R20 (.79) | Transverse roller 170L R20 (.79) |



Characteristics available upon request.

MB

Ø No  
Actuator**5**

To order please specify :

|                                                    |                       |                                                                               |                       |                                  |
|----------------------------------------------------|-----------------------|-------------------------------------------------------------------------------|-----------------------|----------------------------------|
| <b>1</b> Switch Type                               | <b>2</b> Contact Type | <b>3</b> Connection                                                           | <b>4</b> Actuators    | <b>5</b> Actuator Position       |
| 831700<br>831704<br>831709                         | A<br>B<br>C           | 1 5<br>2 6<br>3 7<br>4 8                                                      | A<br>B<br>C<br>D<br>Ø | L - Left (Standard)<br>R - Right |
| To order actuators separately, use the 8 digit P/N |                       | Example P/N is 831700 SPDT solder terminals "C" actuator mounted on the left. |                       |                                  |


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com


# Subminiature Switches DIN 41635 B

## Dimensions


### 83 170 Asymmetric

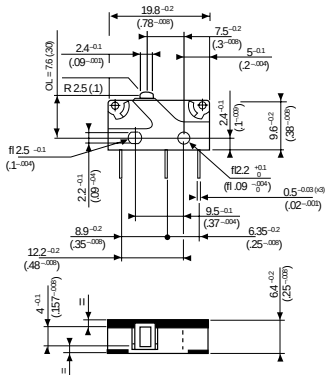

### 83 170 Symmetric



### 83 170 with MB Button




Mounting by M2 screws  
Torque : 2 cm daN

mm (in)

## Connections


### 2

Solder




### 1

.11x.02 Quick Connects




### 3-4

Straight PCB




### 5-6

Side Output PCB Rear



### 7-8


Side Output PCB Front



## Printed circuit board mounting


Asymmetric

3 5 7



Symmetric

4 6 8




mm (in)

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Actuators


### Actuator mounting positions




A B C



E




F



mm (in.)

## Mounting accessories

### Mounting pins



mm (in.)


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



## General specifications

### Layout



### Components

#### Material


- Case : UL 94VO glass-filled polyester
- Button : Polyester
- Membrane : silicon
- Contacts : AgCdO  
AgNi (dual current),
- Terminals : tinned brass
- Cable : PVC (IP 67)
- Leads : PVC

#### Actuators

- flat : stainless steel
- roller : stainless steel with polyamide roller

Approvals 83 180/83 186 : NF. UL - cUL on request

### Operating curve 250 V~

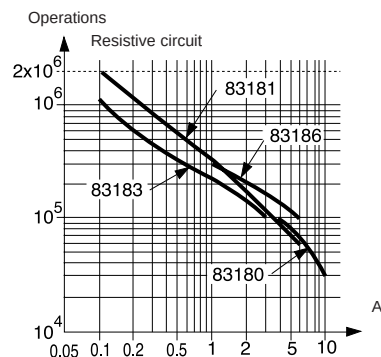

### Switch rating with DC supply

|      |                | 83 180 | 83 181 | 83 183 | 83 186 |
|------|----------------|--------|--------|--------|--------|
| 12 V | Resistive load | 10 A   | 6 A    | 3 A    | 6 A    |
|      | Inductive      | 10 A   | 6 A    | 3 A    | 6 A    |
|      | L/R 5 ms       | 10 A   | 6 A    | 3 A    | 6 A    |
| 24 V | Resistive load | 10 A   | 6 A    | 3 A    | 6 A    |
|      | Inductive      | 5 A    | 5 A    | 3 A    | 5 A    |
|      | L/R 5 ms       | 5 A    | 5 A    | 3 A    | 5 A    |

Model 83 181 is designed to operate equally well on dual-current (1 mA 4 V minimum) or medium-current (6 A maximum) circuits. However, a given product should only be used to switch one type of circuit during its working life.

### Degree of protection

- Tag version : casing = IP67  
terminals = IP00
- Lead / cable version : outlet / casing = IP67

## Types

### Part numbers for standard products with connection of type

1  
2  
FD0

### Features

### Electrical characteristics

| Current rating at 250 V | Nominal<br>Hp | A<br>1/2 |
|-------------------------|---------------|----------|
|-------------------------|---------------|----------|

### Mechanical characteristics

|                                   |                                  |
|-----------------------------------|----------------------------------|
| Operating force - max.            | N (oz.)                          |
| Release force - min.              | N (oz.)                          |
| Total travel force - max.         | N (oz.)                          |
| Permitted overtravel force - max. | N (oz.)                          |
| Rest position - max.              | mm (in.)                         |
| Tripping point                    | mm (in.)                         |
| Differential travel               | mm (in.)                         |
| Overtravel - min.                 | mm (in.)                         |
| Ambient operating temperature     | for tag version °C (°F)          |
|                                   | for lead / cable version °C (°F) |
| Mechanical durability             | Operations                       |
| Contact gap                       | mm (in.)                         |
| Weight (tag version)              | g (oz.)                          |


### Contact Type

C (Form C) SPDT

B (Form B) SPNC not available in PC terminals

A (Form A) SPNO not available in PC terminals

### Connections



### Actuators and mounting positions

#### Part numbers for standard actuators

Actuators - Length mm (in.)

### Mounting position

|                |          |
|----------------|----------|
| Coefficient    |          |
| Tripping point | mm (in.) |
| 83 180         |          |
| 83 181/183/186 |          |

#### Part numbers for standard actuators

Actuators - Length mm (in.)

### Mounting positions

|                |  |
|----------------|--|
| Coefficient    |  |
| Tripping point |  |

Except where otherwise indicated, actuators are supplied unmounted.

For factory mounting, specify fixing position L or R.

- To calculate force : take the force quoted for the switch and divide by the coefficient given in the table.

- To calculate travel : take the travel quoted for the switch and multiply by the same coefficient.

### Mounting accessories for PCB mounting : 5 / 6 / 7 / 8

See page 3/9.

## Other information

For other forces, actuators, connections and temperatures, please consult us.

Normally stocked items

Catalog products produced to order



| 83180        | 83181        | 83183        | 83186        |
|--------------|--------------|--------------|--------------|
| 831800C1.0   | 831810C1.0   | 831830C1.0   | 831860C1.0   |
| 831800C2.0   | 831810C2.0   | 831830C2.0   | 831860C2.0   |
| 831800CFD0.0 | 831810CFD0.0 | 831830CFD0.0 | 831860CFD0.0 |

| High current | Dual current | Medium current | Standard |
|--------------|--------------|----------------|----------|
| 10           | 6            | 3              | 6        |
| 12.5         | 7.5          | 4              | 7.5      |

|                       |                       |                       |                       |
|-----------------------|-----------------------|-----------------------|-----------------------|
| 3.4 (12)              | 2.5 (8.8)             | 2.5 (8.8)             | 2.5 (8.8)             |
| 1 (3.5)               | 0.8 (2.8)             | 0.8 (2.8)             | 0.8 (2.8)             |
| 5 (17.6)              | 4.2 (14.1)            | 4.2 (14.1)            | 4.2 (14.1)            |
| 10 (35.3)             | 10 (35.3)             | 10 (35.3)             | 10 (35.3)             |
| 9.3 (.37)             | 9.3 (.37)             | 9.3 (.37)             | 9.3 (.37)             |
| 8.4 ±0.3 (.33 ±0.012) | 8.4 ±0.3 (.33 ±0.012) | 8.4 ±0.3 (.33 ±0.012) | 8.4 ±0.3 (.33 ±0.012) |
| 0.10 (.004)           | 0.10 (.004)           | 0.10 (.004)           | 0.10 (.004)           |
| 0.6 (.024)            | 0.6 (.024)            | 0.6 (.024)            | 0.6 (.024)            |
| -40 +125 (-40 +257)   | -40 +125 (-40 +257)   | -40 +125 (-40 +257)   | -40 +125 (-40 +257)   |
| -40 +105 (-40 +221)   | -40 +105 (-40 +221)   | -40 +105 (-40 +221)   | -40 +105 (-40 +221)   |
| 10 <sup>6</sup>       | 2 x 10 <sup>6</sup>   | 2 x 10 <sup>6</sup>   | 2 x 10 <sup>6</sup>   |
| 0.4 (.016)            | 0.4 (.016)            | 0.4 (.016)            | 0.4 (.016)            |
| 2 (.07)               | 2 (.07)               | 2 (.07)               | 2 (.07)               |

| C | C | C | C |
|---|---|---|---|
| B | B | B | B |
| A | A | A | A |

|   |   |   |   |     |     |     |       |       |       |
|---|---|---|---|-----|-----|-----|-------|-------|-------|
| 5 | 6 | 7 | 8 | FD0 | FB0 | FG0 | CD0** | CB0** | CG0** |
|---|---|---|---|-----|-----|-----|-------|-------|-------|

| A 79 253 327                                       | B 79 253 326                                      | C 79 253 328                                        | E 79 218 454                                        |
|----------------------------------------------------|---------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|
| Flat 170A R18.3 (.72)                              | Flat 170A R24 (.94)                               | Flat 170A R41 (1.61)                                | Roller 170E R20 (.79)                               |
| L 3<br>10.4 <sup>+1.2</sup> (.41 <sup>+05</sup> )  | L 4<br>11.1 <sup>+1.2</sup> (.44 <sup>+05</sup> ) | L 7<br>13.2 <sup>+2.5</sup> (.52 <sup>+1</sup> )    | L 3<br>15.4 <sup>+1.2</sup> (.61 <sup>+05</sup> )   |
| R 1.5<br>9.2 <sup>+0.6</sup> (.36 <sup>+24</sup> ) | R 2<br>9.6 <sup>+0.6</sup> (.38 <sup>+024</sup> ) | R 3.5<br>10.7 <sup>+1.2</sup> (.42 <sup>+05</sup> ) | R 1.5<br>14.5 <sup>+0.6</sup> (.57 <sup>+24</sup> ) |

| F 79 253 329                                      | D *        | L *                       |
|---------------------------------------------------|------------|---------------------------|
| Dummy roller 170F R19.5 (.77)                     | Screw 170D | Transverse roller 170EL * |
| L 3<br>13 <sup>+1.2</sup> (.51 <sup>+05</sup> )   |            |                           |
| R 1.5<br>12 <sup>+0.6</sup> (.47 <sup>+24</sup> ) |            |                           |

Ø No  
Actuator

\* Special order, contact us for part number  
\*\* Cable version for types 83 181, 83 183 and 83 186

To order please specify :

|                                                       |                               |                                                                        |                                           |                                                         |
|-------------------------------------------------------|-------------------------------|------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------|
| 1 Switch Type<br>831810<br>831830<br>831860<br>831800 | 2 Contact Type<br>A<br>B<br>C | 3 Connection<br>1 6<br>2 7<br>3 8<br>4 FDØ CDØ<br>5 FGØ CBØ<br>FBØ CGØ | 4 Actuators<br>Ø<br>A<br>B<br>C<br>D<br>E | 5 Actuator Position<br>L - Left (Standard)<br>R - Right |
|-------------------------------------------------------|-------------------------------|------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------|

To order actuators separately, use the 8 digit P/N

Example P/N is 831810 SPDT solder terminals with no actuator.


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com


# Sealed Subminiature Switches DIN 41635 B

## Dimensions

### Symmetric

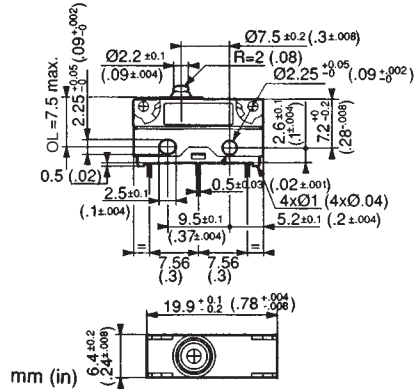

### Asymmetric



Fixed by 2 x M2 screws

Torque for


screw alone: 0.2 Nm (1.75 in. lbs.)

screw + washer: 0.3 Nm (2.65 in. lbs.)


## Connections

### Terminals


2 Solder




1 Faston 2.8 x 0.5 .110" Quick Connects

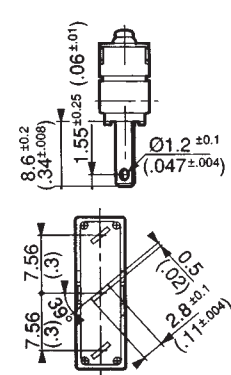


3 - 4 Straight PCB output



5 - 6 Side output, PCB rear




7 - 8 Side output, PCB front




### Printed circuit board mounting

Asymmetric  
3, 5, 7




Symmetric  
4, 6, 8




### Mounting on a printed circuit board with mounting pins


Asymmetric



Symmetric

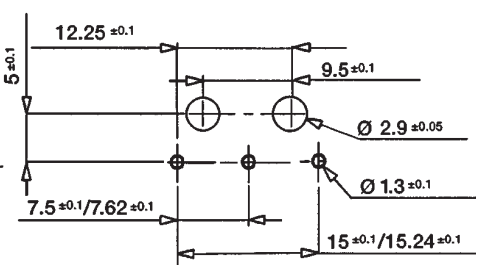


### Lead output

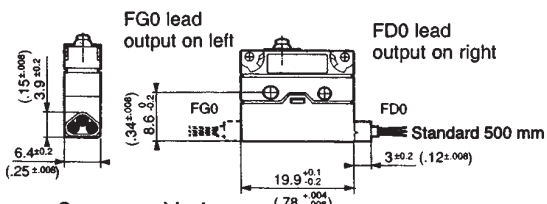


Common = black  
NC = brown  
NO = blue  
mm (in)

Conductor cross-section :  
83181 / 83183 / 83186 = 3 x 0.5 mm<sup>2</sup> (.12 x .02 in<sup>2</sup>)  
83180 = 3 x 0.75 mm<sup>2</sup> (.12 x .03 in<sup>2</sup>)




### Mounting pins



Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)


## Cable output

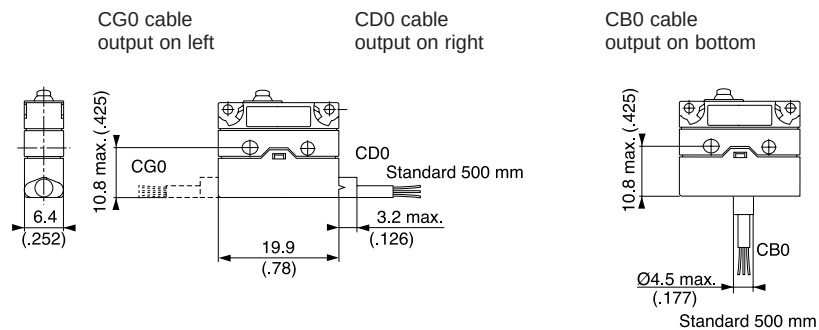

mm (in.)

## Actuators




### Mounting positions



A, B, C  
Flat

E  
Roller

F  
Dummy roller



mm (in.)

### Recommendations for operation from the side




Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## General specifications

### Layout



### Components

#### Material

- Case : glass-filled polyamide (self-extinguishing version to UL 94 VO and IEC 695-2-1 850° C - available on request)
- Button : polyamide
- Contacts : nickel silver or gold alloy (dual-current)


#### Actuators

- flat : stainless steel
- roller : stainless steel, glass-filled polyamide roller
- other types of polyamide


Approvals: NF - UL/cUL

### Operating curve


For type 83 161 1 3




For type 83 161 5 - 5 SP 4136



For type 83 161 8



For type 83 161 9 SP 4136



For types 83 161 8 - 9 SP 4136 dual-current

Models 83 161 8 and 83 161 9 SP 4136 are designed to operate equally well on dual-current (1 mA 4 V minimum) or medium-current (5 A maximum) circuits.

However, a given product should only be used to switch one type of circuit during its working life.

## Types

Part numbers for standard products with connections of type

2  
3  
6

### Features

### Electrical characteristics

|                             |            |    |
|-----------------------------|------------|----|
| Current rating at 125/250 V | Current    | A  |
|                             | Horsepower | HP |

### Mechanical characteristics

|                                    |            |
|------------------------------------|------------|
| Operating force - max.             | N (oz.)    |
| Release force - min.               | N (oz.)    |
| Total travel force - max.          | N (oz.)    |
| Permitted overtravel force - max.  | N (oz.)    |
| Rest position - max.               | mm (in.)   |
| Tripping point                     | mm (in.)   |
| Differential travel                | mm (in.)   |
| Overtravel - min. (OT)             | mm (in.)   |
| Ambient operating temperature      | °C (°F)    |
| Mechanical durability (for 2/3 OT) | Operations |
| Contact gap                        | mm (in.)   |
| Weight                             | g (oz.)    |

### Contact type

C (Form C) SPDT

B (Form B) SPNC

A (Form A) SPNO

### Connections



2 solder



3 for 1/4" Quick Connects

### Actuators and mounting positions

Part numbers for standard actuators A 79 215 740

Actuators-Length mm (in.) Flat 161A R14.2 (.56)



|                                  |                                |                                   |
|----------------------------------|--------------------------------|-----------------------------------|
| Mounting positions               | A                              | B                                 |
| Coefficient                      | 2                              | 1                                 |
| Tripping point (except 83 161 6) | 15.2 $\pm 1$ (.6 $\pm 0.04$ )  | 15.2 $\pm 0.45$ (.6 $\pm 0.018$ ) |
| Tripping point 83 161 6          | 14.8 $\pm 1$ (.59 $\pm 0.04$ ) | 15 $\pm 0.45$ (.59 $\pm 0.018$ )  |

Part numbers for standard actuators H 79 218 651

Actuators-Length mm (in.) Dummy roller 161G R21.8 (.86)



|                                  |                                |                                  |
|----------------------------------|--------------------------------|----------------------------------|
| Mounting positions               | A                              | B                                |
| Coefficient                      | 3                              | 1.8                              |
| Tripping point (except 83 161 6) | 21.7 $\pm 2$ (.85 $\pm 0.08$ ) | 21.7 $\pm 0.7$ (.85 $\pm 0.03$ ) |
| Tripping point 83 161 6          | 21.5 $\pm 2$ (.85 $\pm 0.08$ ) | 21.5 $\pm 0.7$ (.85 $\pm 0.03$ ) |

## Other information


For other forces, actuators, connections and temperatures, please consult us.

Normally stocked items


Catalog products produced to order

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com



| 1                                            |                                              |                                              |                                              |                                              |                                              |                                              |
|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|
| 83161.1(10.1A)                               | 83161.2(15.1A)                               | 83161.3(10.1A)                               | 83161.5(4A)<br>83161.9(0.1A)                 | 83161.5SP4136<br>83161.9SP4136               | 83161.6                                      | 83161.8(0.1A)                                |
| 831611C2.0                                   | 831612C2.0                                   | 831613C2.0                                   | 831615C2.0                                   | •                                            | 831616C2.0                                   | 831618C2.0                                   |
| 831611C3.0                                   | 831612C3.0                                   | 831613C3.0                                   | 831615C3.0                                   | •                                            | 831616C3.0                                   | 831618C3.0                                   |
| 831611C6.0                                   | 831612C6.0                                   | 831613C6.0                                   | 831615C6.0                                   | •                                            | 831616C6.0                                   | 831618C6.0                                   |
| High Force                                   | High Current                                 | Standard                                     | Low Force                                    | Ultra Light Force                            | Wide Gap                                     | Dual Current                                 |
| 10.1                                         | 15.1                                         | 10.1                                         | 4                                            | 4                                            | 6.1                                          | 0.1                                          |
| 1/2                                          | 1/2                                          | 1/2                                          | 1/10                                         | 1/10                                         | 1/3                                          | N/A                                          |
| 3 (10.5)                                     | 0.8 (2.8)                                    | 0.8 (2.8)                                    | 0.25 (0.9)                                   | 0.15 (0.54)                                  | 5 (18)                                       | 0.8 (2.8)                                    |
| 1 (3.5)                                      | 0.2 (0.7)                                    | 0.2 (0.7)                                    | 0.05 (0.18)                                  | 0.04 (0.14)                                  | 0.5 (1.8)                                    | 0.2 (0.7)                                    |
| 4.5 (15.8)                                   | 2 (7.0)                                      | 2 (7.0)                                      | 0.35 (1.2)                                   | 0.2 (0.72)                                   | 6 (21.6)                                     | 0.2 (.07)                                    |
| 20 (70.5)                                    | 20 (70.5)                                    | 20 (70.5)                                    | 20 (70.5)                                    | 20 (70.5)                                    | 20 (70.5)                                    | 20 (70.5)                                    |
| 16.1 (0.63)                                  | 16.2 (0.64)                                  | 16.2 (0.64)                                  | 16.3 (0.64)                                  | 16.3 (0.64)                                  | 16.1 (0.63)                                  | 16.2 (0.64)                                  |
| 14.7 <sup>+0.4</sup> (.58 <sup>+0.16</sup> ) | 14.7 <sup>+0.3</sup> (.58 <sup>+0.16</sup> ) | 14.7 <sup>+0.3</sup> (.58 <sup>+0.16</sup> ) | 14.7 <sup>+0.4</sup> (.58 <sup>+0.16</sup> ) | 14.7 <sup>+0.3</sup> (.58 <sup>+0.16</sup> ) | 14.5 <sup>+0.4</sup> (.58 <sup>+0.16</sup> ) | 14.7 <sup>+0.4</sup> (.58 <sup>+0.16</sup> ) |
| 0.35 (0.014)                                 | 0.35 (0.014)                                 | 0.35 (0.014)                                 | 0.35 (0.014)                                 | 0.35 (0.014)                                 | 0.8 (0.03)                                   | 0.35 (0.014)                                 |
| 1.1 (0.05)                                   | 1.2 (0.05)                                   | 1.2 (0.05)                                   | 1.1 (0.05)                                   | 1.2 (0.05)                                   | 0.9 (0.035)                                  | 1.2 (0.05)                                   |
| -20 +125 (-4 +257)                           | -20 +125 (-4 +257)                           | -20 +125 (-4 +257)                           | -20 +125 (-4 +257)                           | -20 +125 (-4 +257)                           | -20 +125 (-4 +257)                           | -20 +125 (-4 +257)                           |
| 10 <sup>7</sup>                              | 2 x 10 <sup>7</sup>                          | 2 x 10 <sup>7</sup>                          | 5 x 10 <sup>7</sup>                          | 5 x 10 <sup>7</sup>                          | 5 x 10 <sup>4</sup>                          | 2 x 10 <sup>7</sup>                          |
| 0.4 (0.016)                                  | 0.4 (0.016)                                  | 0.4 (0.016)                                  | 0.4 (0.016)                                  | 0.4 (0.016)                                  | 3.2 (0.126)                                  | 0.4 (0.016)                                  |
| 5.6 (.2)                                     | 5.6 (.2)                                     | 5.6 (.2)                                     | 5.6 (.2)                                     | 5.6 (.2)                                     | 5.6 (.2)                                     | 5.6 (.2)                                     |
| 2                                            |                                              |                                              |                                              |                                              |                                              |                                              |
| C                                            | C                                            | C                                            | C                                            | C                                            | C                                            | C                                            |
| B                                            | B                                            | B                                            | B                                            | B                                            | B                                            | B                                            |
| A                                            | A                                            | A                                            | A                                            | A                                            | A                                            | A                                            |
| 3                                            |                                              |                                              |                                              |                                              |                                              |                                              |



5 screw



6 for 3/16 Quick Connects



7 for .11 Quick Connects

|                                                         |                                          |                                            |                                            |                                            |  |                                                                                          |                                            |                                            |                                          |                                            |                                             |
|---------------------------------------------------------|------------------------------------------|--------------------------------------------|--------------------------------------------|--------------------------------------------|--|------------------------------------------------------------------------------------------|--------------------------------------------|--------------------------------------------|------------------------------------------|--------------------------------------------|---------------------------------------------|
| 4                                                       |                                          |                                            |                                            |                                            |  |                                                                                          |                                            |                                            |                                          |                                            |                                             |
| B 70 507 524                                            |                                          |                                            | E 79 215 742                               |                                            |  | G 70 507 529                                                                             |                                            |                                            | F 70 507 528                             |                                            |                                             |
| Flat 161A R25.4 (1)                                     |                                          |                                            | Roller 161E R13.6 (.54)                    |                                            |  | Roller 161E R24.1 (.95)                                                                  |                                            |                                            | Dummy 161F roller R22.2 (.84)            |                                            |                                             |
|                                                         |                                          |                                            |                                            |                                            |  |                                                                                          |                                            |                                            |                                          |                                            |                                             |
| A                                                       | B                                        | C                                          | A                                          | B                                          |  | A                                                                                        | B                                          | C                                          | A                                        | B                                          | C                                           |
| 4                                                       | 2                                        | 1.5                                        | 2                                          | 1                                          |  | 4                                                                                        | 2                                          | 1.5                                        | 3                                        | 1.8                                        | 1.5                                         |
| 15.2 <sup>+2.5</sup> (.6 <sup>+1</sup> )                | 15.2 <sup>+1</sup> (.6 <sup>+04</sup> )  | 15.2 <sup>+0.8</sup> (.6 <sup>+03</sup> )  | 20.5 <sup>+1.5</sup> (.81 <sup>+06</sup> ) | 20.5 <sup>+0.8</sup> (.81 <sup>+03</sup> ) |  | 20.5 <sup>+2.9</sup> (.81 <sup>+11</sup> )                                               | 20.5 <sup>+1.5</sup> (.81 <sup>+06</sup> ) | 20.5 <sup>+1.2</sup> (.81 <sup>+05</sup> ) | 20.4 <sup>+2</sup> (.8 <sup>+08</sup> )  | 20.5 <sup>+0.7</sup> (.81 <sup>+03</sup> ) | 20.5 <sup>+0.9</sup> (.81 <sup>+035</sup> ) |
| 14.4 <sup>+2.5</sup> (.56 <sup>+1</sup> )               | 14.8 <sup>+1</sup> (.58 <sup>+04</sup> ) | 14.9 <sup>+0.8</sup> (.59 <sup>+03</sup> ) | 20.1 <sup>+1.5</sup> (.79 <sup>+06</sup> ) | 20.3 <sup>+0.8</sup> (.80 <sup>+03</sup> ) |  | 19.7 <sup>+2.9</sup> (.76 <sup>+11</sup> )                                               | 20.1 <sup>+1.5</sup> (.79 <sup>+06</sup> ) | 20.2 <sup>+1.2</sup> (.79 <sup>+05</sup> ) | 20.2 <sup>+2</sup> (.79 <sup>+08</sup> ) | 20.2 <sup>+2</sup> (.79 <sup>+08</sup> )   |                                             |
| 4                                                       |                                          |                                            |                                            |                                            |  |                                                                                          |                                            |                                            |                                          |                                            |                                             |
| L                                                       |                                          |                                            | V                                          |                                            |  | C 70 507 526                                                                             |                                            |                                            | D 79 215 835                             |                                            |                                             |
| ** Telescopic plunger<br>Manual action<br>161L          |                                          |                                            | 161V                                       |                                            |  | Flat 161A R50 (1.9)                                                                      |                                            |                                            | Flat 161A R60 (2.39)                     |                                            |                                             |
|                                                         |                                          |                                            |                                            |                                            |  |                                                                                          |                                            |                                            |                                          |                                            |                                             |
| D Factory Mount only                                    |                                          |                                            | D Factory Mount only                       |                                            |  | A                                                                                        |                                            |                                            | A                                        |                                            |                                             |
| 1                                                       |                                          |                                            | 1                                          |                                            |  | 6                                                                                        |                                            |                                            | 7                                        |                                            |                                             |
| 21.5 <sup>+1</sup> (.85 <sup>+04</sup> )                |                                          |                                            | 18.35 <sup>+0.45</sup>                     |                                            |  | 15.2 <sup>+0.3</sup>                                                                     |                                            |                                            | 15.2 <sup>+0.9</sup>                     |                                            |                                             |
| 21.5 <sup>+1</sup> (.85 <sup>+04</sup> )                |                                          |                                            |                                            |                                            |  | 15.2 <sup>+2</sup>                                                                       |                                            |                                            | 15.2 <sup>+2.5</sup>                     |                                            |                                             |
|                                                         |                                          |                                            |                                            |                                            |  | 15.2 <sup>+1.6</sup>                                                                     |                                            |                                            | 15.2 <sup>+2.3</sup>                     |                                            |                                             |
| For factory mounting, specify fixing position A, B or C |                                          |                                            |                                            |                                            |  | ** For 83 161 1, 83 161 3, 83 161.6, 83 161 8, mounted in factory (supplied without nut) |                                            |                                            |                                          |                                            |                                             |


For factory mounting, specify fixing position A, B or C

To order, please specify :

| 1                                                  | Switch Type | 2 | Contact Type | 3 | Connection | Example : 831612 C 3 • C A                                                  | 4 | Actuators | 5 | Actuator Position |
|----------------------------------------------------|-------------|---|--------------|---|------------|-----------------------------------------------------------------------------|---|-----------|---|-------------------|
| 831612                                             | 831619      | A | 2            | 2 | 2          | 2                                                                           | Ø | F         |   | A B (std) C D     |
| 831613                                             | 831616      | B | 3            | 3 | 3          | 3                                                                           | A | G         |   |                   |
| 831615                                             | 831611      | C | 5            | 5 | 5          | 5                                                                           | B | H         |   |                   |
| 831618                                             |             |   | 6            | 6 | 6          | 6                                                                           | C | L         |   |                   |
|                                                    |             |   | 7            | 7 | 7          | 7                                                                           | D | V         |   |                   |
| To order actuators separately, use the 8 digit P/N |             |   |              |   |            | Example switch is 831612, SPDT, 1/4" Q.C., C actuator mounted in A position |   |           |   |                   |
|                                                    |             |   |              |   |            | Ø = No actuator                                                             |   |           |   |                   |

## Dimensions

83 161


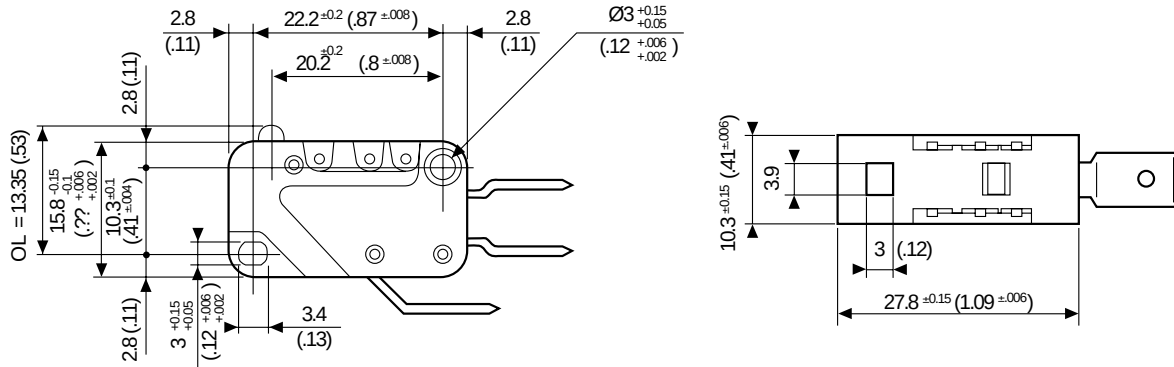


mm (in)

## Connections

2 Solder




3 (6.3x0.8 (1/4x.03)) Quick Connects

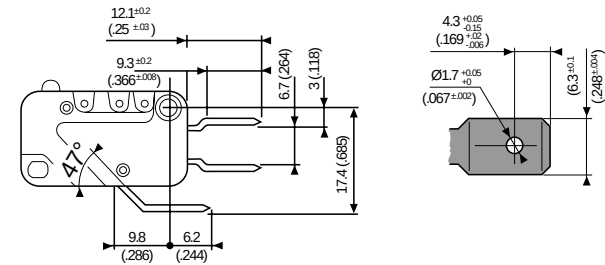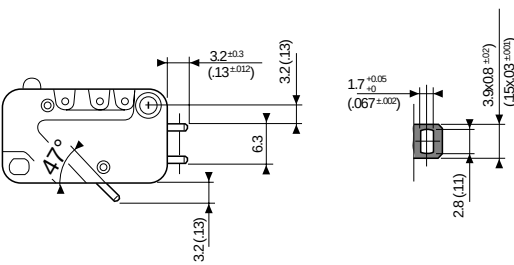


5 Screw

6 (4.8x0.5 (.3/16x.02)) Quick Connects

7 (2.5x0.5 (.11x.02)) Quick Connects

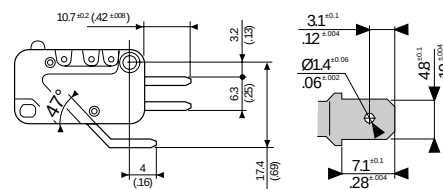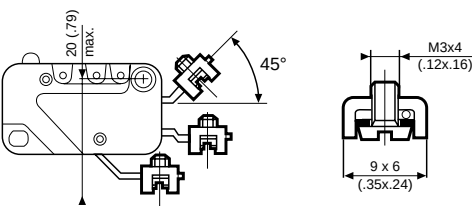

Actuators  
mm (in)

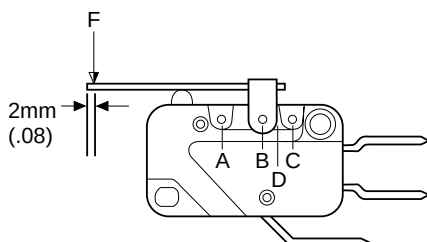

**Force calculation** : divide the switch forces by the coefficient in the table.

**Travel calculation** : multiply the switch travel by the same coefficient.

**Example :**

83 161 3 with B Flat 161A actuator R 25.4 (1) position A (coef. 4)


Operating force :  $0.8 \div 4 = 0.2$  N

Pre-travel:  $1.4 \times 4 = 5.6$  mm (.055 x 4 = .22 in)

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Actuator Mounting Positions

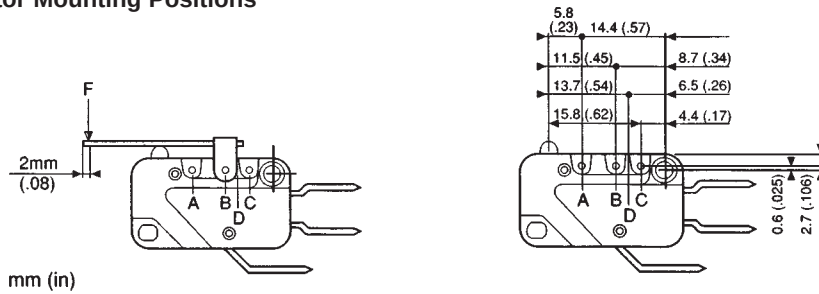


## Actuators


### E - G

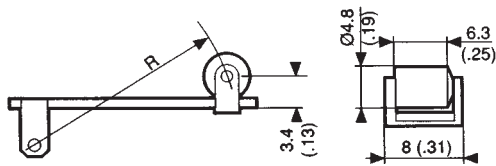

### V




### F

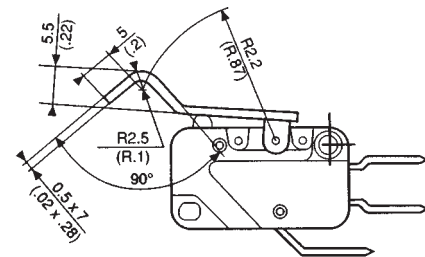


mm (in)

### A - B - C - D

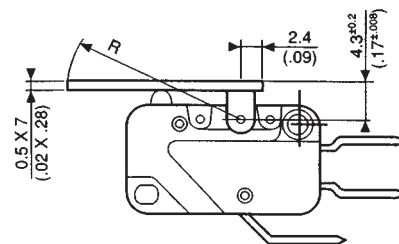


### L

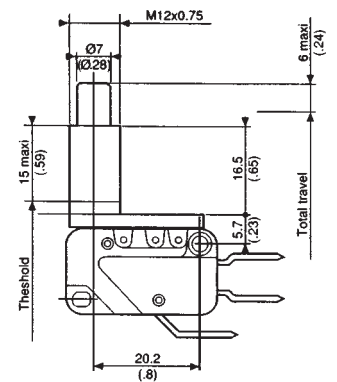


| Nut depth   | Torque max.        |
|-------------|--------------------|
| 1.5mm (.06) | 5Cm N (7 in oz.)   |
| 2mm (.08)   | 7Cm N (10 in. oz)  |
| 2.5mm (.1)  | 10Cm N (14 in. oz) |

### H

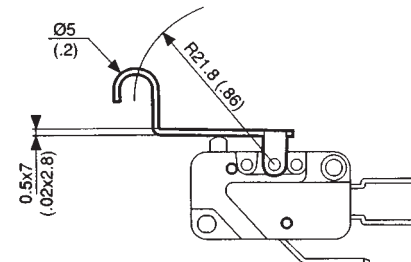

## Accessories

Nuts 70 602 118 for L type actuator




Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



# Miniature Positive Break Switches Series 83 160 DIN 41635 A




## General specifications

### Layout

The contact conforms to NFC 63 143 and IEC 947.5.1

\*The SPDT version conforms to standard IEC 947.5.1 if only the normally closed contact is used.

The switch operating principle forces the contacts open even in the event of welding (positive break operation).



### Components

#### Material

- Case : glass-filled polyamide
  - Cover : transparent polycarbonate
  - Contacts : nickel silver
  - Positive rocker : high temperature thermoplastic
- Actuators** : stainless steel  
- polyamide roller

### Electrical characteristics

#### Short-circuit test

- (from IEC 947-5-1 § 8.34)
- Current peak 1000 A at 250 V ~ 0.5 < cos φ < 0.7
- Short-circuit protection (SCPD) : fuse 10 A gG
- (IEC 60) (1.2/50 μs) : 2500 V

#### Electrical life


- Max. operations : 20 cycles/min
- Resistive load at 250 V ~ 16 A : 10<sup>5</sup> cycles
- Inductive load (IEC 947.5.1) : AC 15 : 250 V ~ 6 A : 0.3 x 10<sup>5</sup> operations
- DC 13 : 24 V ~ 20 W L/R = 40 ms : 3 x 10<sup>5</sup> operations
- 120 V ~ 20 W L/R = 40 ms : 5 x 10<sup>5</sup> operations

### Definitions

**P.O.F.** Minimum Positive Opening Force.  
The operating force that has to be applied to the operating device to produce the positive opening action.

**P.O.P.** Maximum Positive Opening Position.  
The position of the operating device at the moment when positive opening of the contacts occurs.

For other definitions, see "Basic concepts".

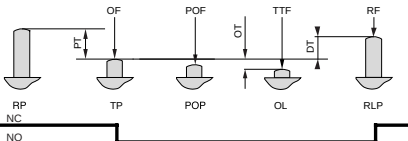

## Types

### 83 160 7

| Features                          |               | With positive break operation                 |                                               |
|-----------------------------------|---------------|-----------------------------------------------|-----------------------------------------------|
| Electrical characteristics        |               | NC                                            | SPDT*                                         |
| Assigned working voltage (Ue)     | V             | 250                                           | 250                                           |
| Assigned working current (Ie)     | A             | 6                                             | 6                                             |
| Thermal current rating (Ith)      | A             | 10                                            | 10                                            |
| Assigned circuit voltage (Ui)     | V             | 250                                           | 250                                           |
| Mechanical characteristics        |               |                                               |                                               |
| Operating force - max.            | N (oz.)       | 4 (14.1)                                      | 4 (14.1)                                      |
| Release force - min.              | N (oz.)       | 1.5 (3.5)                                     | 1.5 (3.5)                                     |
| Min. positive opening force       | N(oz.)        | 18 (63.5)                                     | 18 (63.5)                                     |
| Permitted overtravel force - max. | N (oz.)       | 200 (70.5)                                    | 200 (70.5)                                    |
| Maximum rest position             | mm (in.)      | 15.7 (.62)                                    | 15.7 (.62)                                    |
| Tripping point                    | mm (in.)      | 14.8 <sup>+0.3</sup> (.58 <sup>+0.012</sup> ) | 14.8 <sup>+0.3</sup> (.58 <sup>+0.012</sup> ) |
| Maximum positive opening position | mm (in.)      | 13.5 (.53)                                    | 13.5 (.53)                                    |
| Overtravel - min.                 | mm (in.)      | 1.3 (0.047)                                   | 1.3 (0.047)                                   |
| Operating speed max.              | m/s (ft/sec)  | 0.5 (1.64)                                    | 0.5 (1.64)                                    |
| Operating rate max.               | (operation/s) | 5                                             | 5                                             |
| Operating temperature             | °C (°F)       | -40+85 (-40+185)                              | -40+85 (-40+185)                              |
| Mechanical durability             | Operations    | 10 <sup>7</sup>                               | 10 <sup>7</sup>                               |
| Contact gap                       | mm (in.)      | 1.2 (0.05)                                    | 1.2 (0.05)                                    |
| Weight                            | g (oz.)       | 7 (0.25)                                      | 7 (0.25)                                      |

### Contact Type

B (NC)

B

C (SPDT)\*

C

### Connections



2 solder



3 for 1/4" Quick Connects




6 for 3/16" Quick Connects



X1 for printed circuit board

### Actuators and mounting positions

#### Dimensions

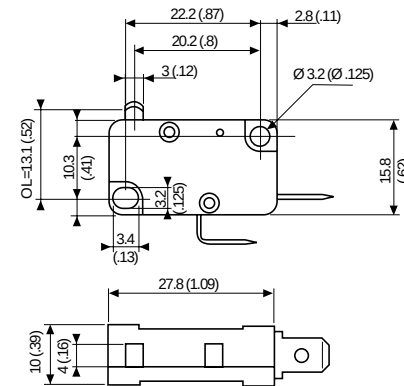


mm (in)


#### Actuators\*\*

Ø=no Actuator


A (Flat)



E (Roller)



L (Pushbutton)



### Other information

For other accessories, connections : please consult us

\*NO – contact is not positive break

\*\* Consult us for actuator length, forces and positions

### To order, specify :

Example : 831607 B 3 • Ø

1 Switch Type

831607

2 Contact Type

B  
C

3 Connection

2  
3  
6  
X1

4 Actuator Type

A L  
E  
Ø = No Actuator

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com

# Miniature Side Rotary (High Sensitivity) Switches Series 83 137



## General specifications

### Layout



### Components

#### Material


- Case : glass filled polyamide

- Contacts : silver


#### Actuators

- Stainless steel wire

### Operating curve



### Actuator setting in $\alpha$

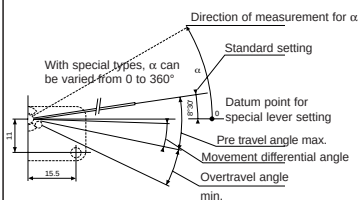

**Approvals** CSA (LR-20418), ASE, Semko, UTE & VDE.

For other connections, actuators, approvals accessories...Please consult factory

## Types

**83 137 0**

### Features

Standard

### Electrical characteristics

Current rating at 125-250 V

Nominal  
Thermal

A  
A

5  
14

### Mechanical characteristics

Maximum operating force

N cm (in. oz)

0.12 (.17)

Minimum release torque

N cm (in. oz)

0.03 (.042)

Overtravel torque

N cm (in. oz)

0.5 (.71)

Movement differential

°

10<sup>+0.4</sup>

Overtravel - min.

°

12

Operating temperature

°C (F°)

-20 to 125 (-4 to 257)

Mechanical life

Operations

10<sup>7</sup>

Contact gap

mm (in)

0.8 (.031)

Weight

g (oz)

7.2 (.25)

### Contact Type

C (Form C) SPDT

C

B (Form B) SPNC

B

A (Form A) SPNO

A

### Connections




2 solder




3 for 1/4" Quick Connects

## Dimensions

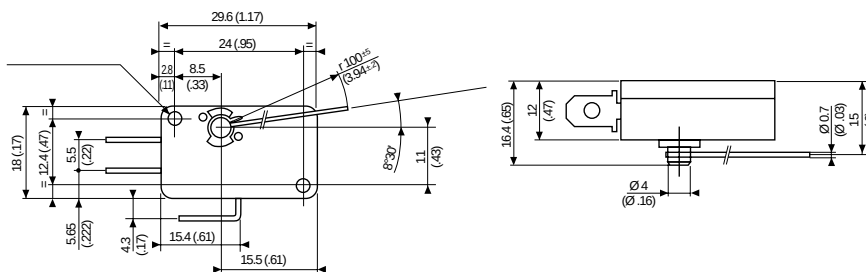

mm (in)

## Dimensions connections

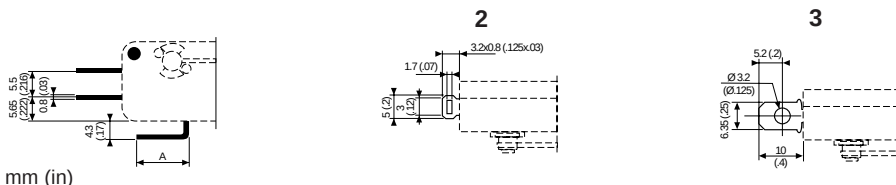

mm (in)

To order, please specify :

Example : 831370 C 3 • W

**1** Switch Type

831370

**2** Contact Type

A  
B  
C


**3** Connection

2  
3

Example switch is: 831370, SPDT, 1/4" Q.C.

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



## General specifications

### Layout



- The NO and NC circuits must both be of the same polarity.

### Components

#### Material


- Case : polyamide (83 106 to 83 112)
- Case : Diallyl-Phthalate (83 154)
- Contacts : nickel silver

#### Actuators

- passivated mild steel
  - roller : nylon
  - adjustable screws : self-retaining
  - plates : passivated mild steel (zinc)
- Note : Fixing holes for these switches have metal ferrules.

Approvals: UL - cUL

## Operating curve



83 154

## Types

83 106 0

### Features

Standard

### Electrical characteristics

|                         |                  |   |      |
|-------------------------|------------------|---|------|
| Current rating at 250 V | Nominal $\equiv$ | A | —    |
|                         | Nominal $\sim$   |   | 10   |
|                         | Thermal          | A | 17.5 |

### Mechanical characteristics

|                                   |            |                                                            |
|-----------------------------------|------------|------------------------------------------------------------|
| Operating force - max.            | N (oz.)    | 4 (14.1)                                                   |
| Release force - min.              | N (oz.)    | 1 (3.5)                                                    |
| Permitted overtravel force - max. | N (oz.)    | 20 (70.5)                                                  |
| Maximum rest position             | mm (in.)   | 12.75 (.5)                                                 |
| Tripping point                    | mm (in.)   | 11.45 <sup>+0.2 -0.25</sup> (11.45 <sup>+0.2 -0.25</sup> ) |
| Differential travel               | mm (in.)   | 0.5 <sup>+0.2 -0.02</sup> (0.02 <sup>+0.008</sup> )        |
| Overtravel - min.                 | mm (in.)   | 0.7 (.28)                                                  |
| Ambient operating temperature     | °C (°C)    | -20 +85 (-4 +185)                                          |
| Mechanical durability             | Operations | 10 <sup>7</sup>                                            |
| Contact gap                       | mm (in.)   | 0.4 x 2                                                    |
| Weight                            | g (oz.)    | 8                                                          |

### Contact type

C (Form C) SPDT

C

B (Form B) SPNC

A (Form A) SPNO

### Connections

## Actuators and mounting positions

### Part numbers for standard actuators

A 70 500 888

Actuators-Length

mm (in.)

Flat R49 (1.92)



|                        |          |                                                     |
|------------------------|----------|-----------------------------------------------------|
| Operating force - max. | N (oz.)  | 1.2 (4.2)                                           |
| Release force - min.   | N (oz.)  | 0.25 (.9)                                           |
| Pre-travel - max.      | mm (in.) | 6.2 (.24)                                           |
| Differential travel    | mm (in.) | 2.1 <sup>+0.9 -0.35</sup> (.083 <sup>+0.035</sup> ) |
| Total travel max.      | mm (in.) | 7.5 (.3)                                            |

Except where otherwise indicated, the flat and roller actuators are mounted as shown in the dimensional drawings (mounted on the left).

### Assemblies

## Other information


For other forces, actuators, connections and temperatures, please consult us.

Normally stocked items

Catalog products produced to order

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

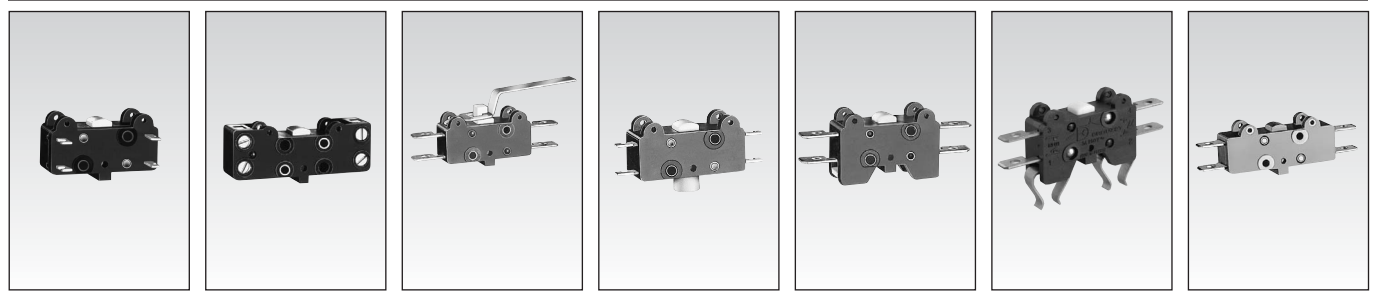

1

83 109 0

83 112 0

83 106 4

83 106 7

83 111 0

83 111 5

83 154 0

| Face terminals | Enclosed screws | Bistable, 2 actuator positions | Bistable, 2 push button positions | Base mounting by screws | Base mounting by clips | Magnetic blow-out switch |
|----------------|-----------------|--------------------------------|-----------------------------------|-------------------------|------------------------|--------------------------|
|----------------|-----------------|--------------------------------|-----------------------------------|-------------------------|------------------------|--------------------------|

|                                                     |                                                     |                      |                      |                                                     |                                                     |                                                     |
|-----------------------------------------------------|-----------------------------------------------------|----------------------|----------------------|-----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|
| 10                                                  | 10                                                  | 10                   | 10                   | 10                                                  | 10                                                  | 5                                                   |
| 17.5                                                | 17.5                                                | 17.5                 | 17.5                 | 17.5                                                | 17.5                                                | 17.5                                                |
| 4 (14.1)                                            | 4 (14.1)                                            | 0.45 (1.62)          | 2 (7.19)             | 4 (14.1)                                            | 4 (14.1)                                            | 4 (14.1)                                            |
| 1 (3.5)                                             | 1 (3.5)                                             |                      |                      | 1 (3.5)                                             | 1 (3.5)                                             | 1 (3.5)                                             |
| 20 (70.5)                                           | 20 (70.5)                                           |                      |                      | 20 (70.5)                                           | 20 (70.5)                                           | 20 (70.5)                                           |
| 12.75 (.5)                                          | 12.75 (.5)                                          |                      |                      |                                                     |                                                     |                                                     |
| 11.45 <sup>+0.2 -0.25</sup> (.45 <sup>±.008</sup> ) | 11.45 <sup>+0.2 -0.25</sup> (.45 <sup>±.008</sup> ) |                      |                      | 11.45 <sup>+0.2 -0.25</sup> (.45 <sup>±.008</sup> ) | 11.45 <sup>+0.2 -0.25</sup> (.45 <sup>±.008</sup> ) | 11.45 <sup>+0.2 -0.25</sup> (.45 <sup>±.008</sup> ) |
| 0.5 <sup>±0.2</sup> (.02 <sup>±.008</sup> )         | 0.5 <sup>±0.2</sup> (.02 <sup>±.008</sup> )         |                      |                      | 0.5 <sup>±0.2</sup> (.02 <sup>±.008</sup> )         | 0.5 <sup>±0.2</sup> (.02 <sup>±.008</sup> )         | 0.65 <sup>±0.25</sup> (.02 <sup>±.008</sup> )       |
| 0.7 (.29)                                           | 0.7 (.29)                                           |                      |                      | 0.7 (.29)                                           | 0.7 (.29)                                           | 0.7 (.29)                                           |
| -20 +85 (-4 +185)                                   | -20 +85 (-4 +185)                                   | -20 +85 (-4 +185)    | -20 +85 (-4 +185)    | -20 +85 (-4 +185)                                   | -20 +85 (-4 +185)                                   | -40 +125 (-4 +257)                                  |
| 10 <sup>7</sup>                                     | 10 <sup>7</sup>                                     | 10 <sup>6</sup>      | 10 <sup>5</sup>      | 10 <sup>7</sup>                                     | 10 <sup>7</sup>                                     | 10 <sup>7</sup>                                     |
| 0.4 x 2 (.016 x .08)                                | 0.4 x 2 (.016 x .08)                                | 0.4 x 2 (.016 x .08) | 0.4 x 2 (.016 x .08) | 0.4 x 2 (.016 x .08)                                | 0.4 x 2 (.016 x .08)                                | 0.5 x 2 (.016 x .08)                                |
| 8 (.3)                                              | 14.5 (.3)                                           | 9 (.32)              | 8 (.3)               | 8 (.3)                                              | 8 (.3)                                              | 11 (.3)                                             |

Contact type

|   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|
| C | C | C | C | C | C | C |
|   |   | B | B | B | B | B |
|   |   | A | A | A | A | A |

2

3



2 solder



3 for 1/4" Quick Connects



1 screw

4

|                                              |                                              |                                              |                                             |                                             |                      |
|----------------------------------------------|----------------------------------------------|----------------------------------------------|---------------------------------------------|---------------------------------------------|----------------------|
| <b>B 70 500 828</b>                          | <b>E 70 500 813</b>                          | <b>Q 70 500 840</b>                          | <b>T 70 500 870</b>                         | <b>B9</b>                                   | <b>21 416 364</b>    |
| R49 (1.92)                                   | Flat R47 (1.85)                              | Lever R26 (1.02)                             | R15.5 (.61)                                 | Operation B9                                | Plate Mounting Screw |
|                                              |                                              |                                              |                                             |                                             |                      |
| 1.2 (4.2)                                    | 1.2 (4.2)                                    | 2.8 (9.9)                                    | 4 (14.1)                                    | 4 (14.1)                                    |                      |
| 0.25 (.9)                                    | 0.25 (.9)                                    | 0.45 (1.6)                                   | 0.8 (2.8)                                   | 1 (3.5)                                     |                      |
| 6.2 (.24)                                    | 6.2 (.24)                                    | 3.2 (.125)                                   | 1.45 (.057)                                 | 1.5 (.059)                                  |                      |
| 2.1 <sup>±0.9</sup> (.083 <sup>±.035</sup> ) | 2.1 <sup>±0.9</sup> (.083 <sup>±.035</sup> ) | 105 <sup>±0.4</sup> (.041 <sup>±.016</sup> ) | 0.5 <sup>±0.2</sup> (.02 <sup>±.008</sup> ) | 0.5 <sup>±0.2</sup> (.02 <sup>±.008</sup> ) |                      |
| 8.4 (.33)                                    | 7.5 (.31)                                    | 4.5 (.18)                                    | 1.9 (.075)                                  | 1.9 (.075)                                  |                      |

|                     |                     |                      |  |
|---------------------|---------------------|----------------------|--|
| <b>Y 70 500 206</b> | <b>H 70 500 208</b> | <b>O2 70 500 218</b> |  |
|---------------------|---------------------|----------------------|--|

Y Side plate



H Horizontal single-pole mounting plate



O2 2-pole side mounting plate



K2 2-pole vertical mounting plate



To order, specify :

|                      |                       |                     |                                                    |                    |                            |
|----------------------|-----------------------|---------------------|----------------------------------------------------|--------------------|----------------------------|
| <b>1</b> Switch Type | <b>2</b> Contact Type | <b>3</b> Connection | Example : 831810 C 2 - Ø                           | <b>4</b> Actuators | <b>5</b> Actuator Position |
| 831060               | C                     | 1                   |                                                    | A                  | L - Left (Standard)        |
| 831090               | B                     | 2                   |                                                    | T                  | R - Right                  |
| 831120               | A                     | 3                   |                                                    | B9                 |                            |
| 831540               |                       |                     | To order actuators separately, use the 8 digit P/N | Ø = No actuator    |                            |


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com


## Standard Switches

## Dimensions


**83 106 - 83 109 - 83 154**

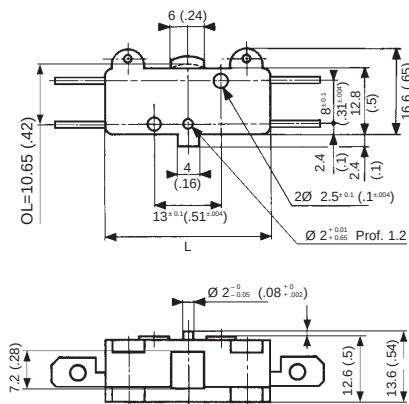

## 83 106 4




## 83 106 7




| Products           | L         |
|--------------------|-----------|
| 83 106 / 109 / 111 | 32 (1.26) |
| 83 154             | 40 (1.57) |


**83 111 0**



83 111 5




## 83 112

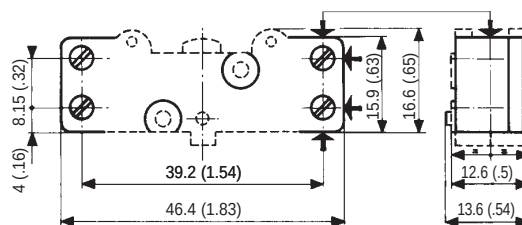


mm (in)

## Connections


1




**2 (83 106)**



**2 (83 109)**



## 3



mm (in)


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



## General specifications

### Layout



### Components

#### Material

- Case : polyester
- Contacts : silver
- Membrane : nitrile on 83 139 0  
silicone on 83 139 1 - 2 - 5

#### Actuators :

- stainless steel
- rollers : polyamide


- The NO and NC circuits must both be of the same polarity.

### Characteristics specific to 83 139 1

- Conform to standards EN 50 014 and 50 018
- Group II classified for explosive atmospheres other than mines subject to firedamp
- Temperature class T6, max. surface temperature 85°C
- LCIE certificate 880022U
- These switches can be enclosed in an envelope of a certified material, particularly to provide mechanical protection

- Degree of protection IP 67.

### Operating curve

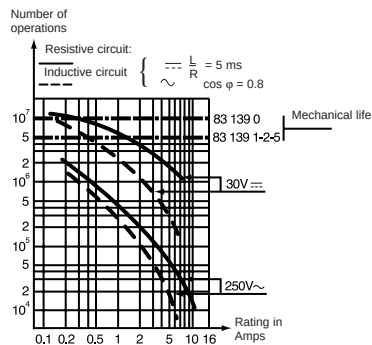

## Types

### Features

### Electrical characteristics

|                             | Nominal | A |
|-----------------------------|---------|---|
| Current rating at 125-250 V |         |   |

### Mechanical characteristics

|                         |            |
|-------------------------|------------|
| Operating force - max.  | N (oz)     |
| Release force - min.    | N (oz)     |
| Max. total travel force | N (oz)     |
| Overtravel max. - force | N (oz)     |
| Maximum rest position   | mm (in)    |
| Tripping point          | mm (in)    |
| Movement differential   | mm (in)    |
| Overtravel - min.       | mm (in)    |
| Operating temperature   | °C (F°)    |
| Mechanical life         | Operations |
| Contact gap             | mm (in)    |
| Weight                  | g (oz)     |

### Contact Type

C (Form C) SPDT

### Mounting Holes

4 holes = A standard

2 holes = B

### Connections

Lead position bottom - standard

Lead position right

Lead position left

### Actuators

#### Part numbers for standard actuators

Actuator-Length mm (in)

|                        |         |
|------------------------|---------|
| Operating force - max. | N (oz)  |
| Release force - min.   | N (oz)  |
| Movement differential  | mm (in) |

#### Part numbers for standard actuators

Actuator-Length mm (in)

|                        |         |
|------------------------|---------|
| Operating force - max. | N (oz)  |
| Release force - min.   | N (oz)  |
| Movement differential  | mm (in) |

## Other information

For other forces, actuators, connections and temperatures, lead lengths, please consult factory.

Normally stocked items

Catalog products produced to order

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



|                                                                                               |                                                                                               |                                                                                            |                                                                                               |
|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| 1                                                                                             |                                                                                               |                                                                                            |                                                                                               |
| 83 139 0                                                                                      | 83 139 5                                                                                      | 83 139 2                                                                                   | 83 139 1                                                                                      |
| Standard                                                                                      | Low temperature                                                                               | Double insulation to NFC 20030 standard classe II                                          | Explosion proof EEX d 11C T6                                                                  |
| 5                                                                                             | 5                                                                                             | 5                                                                                          | 5                                                                                             |
| 3 (10.6)                                                                                      | 3 (10.6)                                                                                      | 3 (10.6)                                                                                   | 3 (10.6)                                                                                      |
| 0.6 (2.1)                                                                                     | 0.6 (2.1)                                                                                     | 0.6 (2.1)                                                                                  | 0.6 (2.1)                                                                                     |
| 4 (14.1)                                                                                      | 4 (14.1)                                                                                      | 4 (14.1)                                                                                   | 4 (14.1)                                                                                      |
| 10 (35.3)                                                                                     | 10 (35.3)                                                                                     | 10 (35.3)                                                                                  | 10 (35.3)                                                                                     |
| A = 8.8 (.35) B = 9.8 (.39)                                                                   | A = 8.8 (.35) B = 9.8 (.39)                                                                   | B = 9.8 (.39)                                                                              | B = 9.8 (.39)                                                                                 |
| A:7.7 <sup>+0.4</sup> (.30 <sup>+0.015</sup> ) B:8.7 <sup>+0.4</sup> (.32 <sup>+0.015</sup> ) | A:7.7 <sup>+0.4</sup> (.30 <sup>+0.015</sup> ) B:8.7 <sup>+0.4</sup> (.32 <sup>+0.015</sup> ) | 8.7 <sup>+0.4</sup> (.32 <sup>+0.015</sup> )                                               | A:7.7 <sup>+0.4</sup> (.30 <sup>+0.015</sup> ) B:8.7 <sup>+0.4</sup> (.32 <sup>+0.015</sup> ) |
| 0.35±0.1 (.014±.004)                                                                          | 0.35±0.1 (.014±.004)                                                                          | 0.35±0.1 (.014±.004)                                                                       | 0.35±0.1 (.014±.004)                                                                          |
| 0.3 (.012)                                                                                    | 0.3 (.012)                                                                                    | 0.3 (.012)                                                                                 | 0.3 (.012)                                                                                    |
| 0 to 85 (32 to 185)                                                                           | 0 to 85 (32 to 185)                                                                           | -40 to 85 (-40 to 185)                                                                     | -40 to 85 (-40 to 185)                                                                        |
| 10 <sup>7</sup>                                                                               | 5 x 10 <sup>7</sup>                                                                           | 5 x 10 <sup>6</sup>                                                                        | 5 x 10 <sup>6</sup>                                                                           |
| 0.3 x 2 (.012 x .008)                                                                         | 0.3 x 2 (.012 x .008)                                                                         | 0.3 x 2 (.012 x .008)                                                                      | 0.3 x 2 (.012 x .008)                                                                         |
| 37 (1.3)                                                                                      | 37 (1.3)                                                                                      | 45 (1.6)                                                                                   | 37 (1.3)                                                                                      |
| 2                                                                                             |                                                                                               |                                                                                            |                                                                                               |
| C                                                                                             | C                                                                                             | C                                                                                          | C                                                                                             |
| 3                                                                                             |                                                                                               |                                                                                            |                                                                                               |
| A                                                                                             | A                                                                                             |                                                                                            |                                                                                               |
| B                                                                                             | B                                                                                             | B                                                                                          | B                                                                                             |
| 4                                                                                             |                                                                                               |                                                                                            |                                                                                               |
| 4 flexible leads ø 2.8 x 0.75 mm <sup>2</sup> length 0.50 m                                   | 4 flexible leads ø 2.8 x 0.75 mm <sup>2</sup> length 0.50 m                                   | 3 lead cable 3 x 0.75 mm <sup>2</sup> length 0.50 m                                        | 4 flexible leads ø 2.8 x 0.75 mm <sup>2</sup> length 0.50 m                                   |
| 5                                                                                             |                                                                                               |                                                                                            |                                                                                               |
| B                                                                                             | B                                                                                             | B                                                                                          | B                                                                                             |
| R                                                                                             | R                                                                                             |                                                                                            | R                                                                                             |
| L                                                                                             | L                                                                                             |                                                                                            | L                                                                                             |
| 6                                                                                             |                                                                                               |                                                                                            |                                                                                               |
| P                                                                                             | R                                                                                             | A 79 215 740                                                                               | B 79 507 524 E 79 215 742 G 70 507 529                                                        |
| Flat 139 AX R29.7 (1.17)**                                                                    | Roller 139 EX R28.7 (1.13)**                                                                  | Flat 161A R14.2 (.56) – R25.4 (1.0)                                                        | Roller 161 E R13.6 (.54) – R24.1 (.94)                                                        |
|                                                                                               |                                                                                               |                                                                                            |                                                                                               |
| 1.5 (5.3)                                                                                     | 1.5 (5.3)                                                                                     | 2.6 (9.2)                                                                                  | 2.6 (9.2)                                                                                     |
| 0.2 (.7)                                                                                      | 0.2 (.7)                                                                                      | 0.35 (1.2)                                                                                 | 0.35 (1.2)                                                                                    |
| 1.5 (.06)                                                                                     | 1.5 (.06)                                                                                     | 0.7 (.028)                                                                                 | 0.7 (.028)                                                                                    |
| F 79 218 581                                                                                  | H 79 218 651                                                                                  | Note : When mounting actuators, a light greasing of the switch push-button is recommended. |                                                                                               |
| Flat 161F R22.3 (1.17)                                                                        | Dummy roller 161 G R21.8 (.86)                                                                |                                                                                            |                                                                                               |
|                                                                                               |                                                                                               |                                                                                            |                                                                                               |
| 2 (7.1)                                                                                       | 2 (7.1)                                                                                       |                                                                                            |                                                                                               |
| 0.2 (.7)                                                                                      | 0.2 (.7)                                                                                      |                                                                                            |                                                                                               |
| 1.1 (.043)                                                                                    | 1.1 (.043)                                                                                    |                                                                                            |                                                                                               |

\*\* Factory mounted only

To order, please specify :

|                                                                                                       |                |                                                 |              |
|-------------------------------------------------------------------------------------------------------|----------------|-------------------------------------------------|--------------|
| Example : 831390 C A B 5 A                                                                            |                |                                                 |              |
| 1 Switch Type                                                                                         | 2 Contact Type | 3 Mounting Holes                                | 4 Connection |
| 831390                                                                                                |                | A                                               | B            |
| 831391                                                                                                | C              | B                                               | R            |
| 831392                                                                                                |                |                                                 | L            |
| 831395                                                                                                |                |                                                 |              |
| Example switch is: 831390, DBDT, 4 mounting holes, leads exit bottom, .5 meter cable with A actuator. |                | To order actuators separately, use 8 digit P/N. |              |
|                                                                                                       |                | 5 Lead Length                                   | 6 Actuators  |
|                                                                                                       |                | .5 - 1/2 meter (std)                            | A F P        |
|                                                                                                       |                | 1 - 1 meter                                     | B H R        |
|                                                                                                       |                | 2 - 2 meter                                     | E G Ø        |


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)




## Dimensions


83 139 0 - 5 - Mounting A = 4 holes

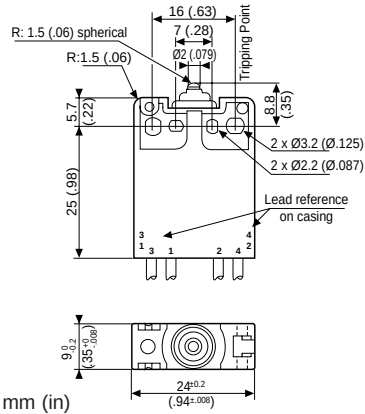

83 139 0 - 1 - 5 - Mounting B = 2 holes


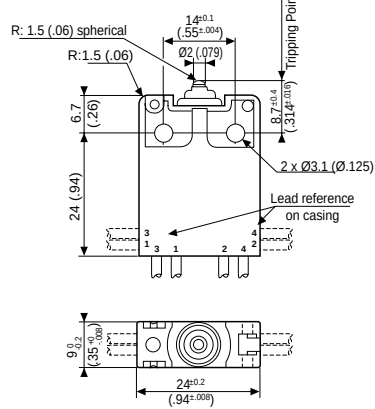


83 139 2

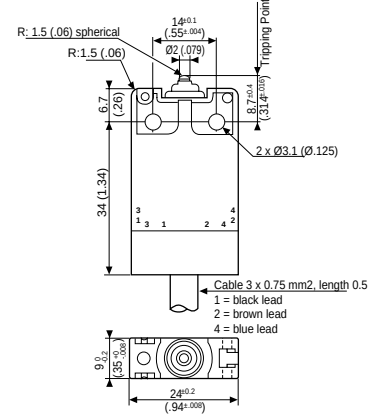


## Actuators Factory Mounted Only


Actuators mounting position (type 139)

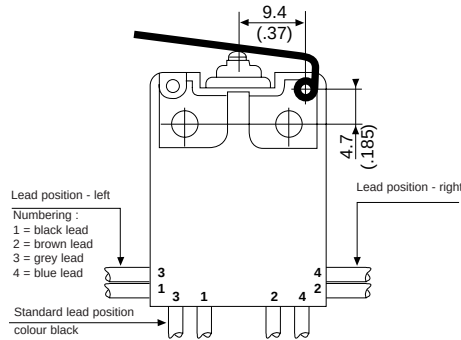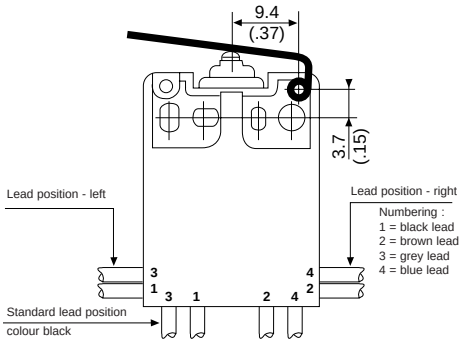

R

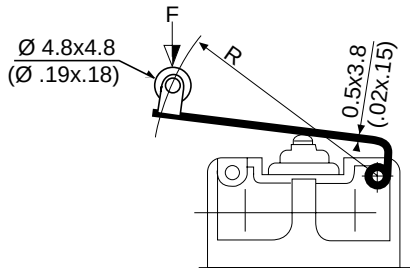

P





mm (in)

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Actuators User or Factory Mounted


Actuators mounting position (type 161)

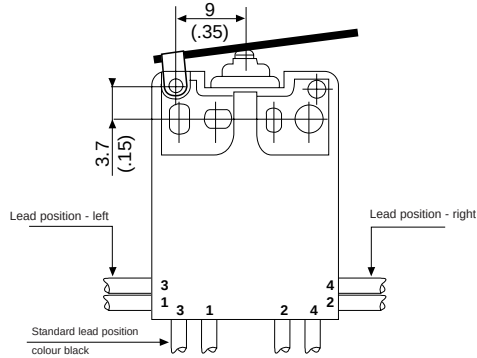


A - B

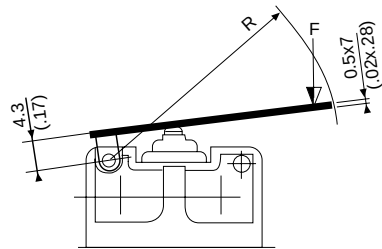


E - G

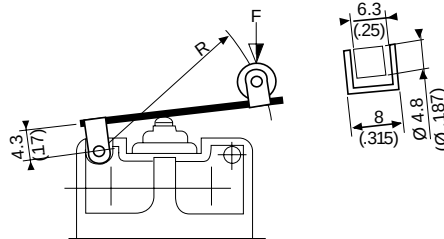

F

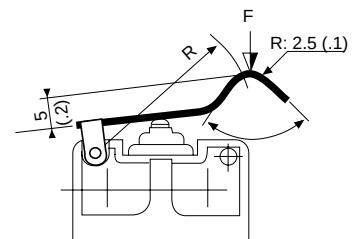

H




mm (in)

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## General specifications

### Layout



83 169

### Components

#### Material


- Case : polyester UL 94 VO
- Contacts : nickel silver gold alloy (low current)
- Membrane : Fluoro - silicone

#### Actuators


- stainless steel
- rollers : polyamide
- Plunger : stainless steel

## Operating curve

83 169 0



83 169 4



## Operating characteristics

83 169 8 and 83 169 9 low current

Intended for use from 1 to 100 mA at 4 to 30 V DC.

Under these conditions, electrical life exceeds mechanical life.

## Degree of protection IP 67

Approvals: UL, cUL (CSA Equivalent)

## Types

### Features

### Electrical characteristics

|                             | Nominal | A |
|-----------------------------|---------|---|
| Current rating at 125-250 V |         |   |

### Mechanical characteristics

|                          |            |
|--------------------------|------------|
| Operating force - max.   | N (oz)     |
| Release force - min.     | N (oz)     |
| Maximum overtravel force | N (oz)     |
| Overtravel max. - force  | N (oz)     |
| Maximum rest position    | mm (in)    |
| Tripping point           | mm (in)    |
| Movement differential    | mm (in)    |
| Overtravel - min.        | mm (in)    |
| Temperature              | °C (F°)    |
| Endurance                | Operations |
| Contact gap              | mm (in)    |
| Weight                   | g (oz)     |

## Contact Type

C (Form C) SPDT

## Connections

Flexible leads  $\varnothing 3 \times 1 \text{ mm}^2$  long 0.50 m

Lead position - right

Lead position - left

3 lead cable -  $3 \times 0.75 \text{ mm}^2$  length 0.50 m, left output only

## Actuators and mounting positions-user or factory mounted

### Part numbers for standard actuators

P

Actuator-Length mm (in.) \*\* Flat **139 AX** R29.7 (1.17)



### Mounting positions

D

|                        |         |                    |
|------------------------|---------|--------------------|
| Operating force - max. | N (oz)  | 2.5 (8.8)          |
| Release force - min.   | N (oz)  | 0.4 (1.4)          |
| Movement differential  | mm (in) | 1.2-0.5 (.047-.02) |

### Part numbers for standard actuators

|                                                                               |         |
|-------------------------------------------------------------------------------|---------|
| Mounting positions                                                            | N (oz)  |
| Operating force - max.                                                        | N (oz)  |
| Release force - min.                                                          | mm (in) |
| Movement differential                                                         |         |
| Unless indicated, flat actuators and roller actuators are delivered unmounted |         |
| ** Factory Mounted Only                                                       |         |

**Note :** When mounting actuators a light greasing of the switch push-button is recommended.

## Other information

For other forces, actuators, connections and temperatures, please contact factory.

Normally stocked items

Catalog products produced to order

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



| 1        |          |          |          |
|----------|----------|----------|----------|
| 83 169 0 | 83 169 4 | 83 169 8 | 83 169 9 |

| Standard                                     | Reduced differential movement                | Low current                                  | Low current, reduced differential movement   |
|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|
| 10                                           | 5                                            | 0.1                                          | 0.1                                          |
| 4 (14.1)                                     | 4 (14.1)                                     | 4 (14.1)                                     | 4 (14.1)                                     |
| 1 (3.5)                                      | 1 (3.5)                                      | 1 (3.5)                                      | 1 (3.5)                                      |
| 8 (28.2)                                     | 8 (28.2)                                     | 8 (28.2)                                     | 8 (28.2)                                     |
| 20 (70.5)                                    | 20 (70.5)                                    | 20 (70.5)                                    | 20 (70.5)                                    |
| 15.9 (.63)                                   | 15.9 (.63)                                   | 15.9 (.63)                                   | 15.9 (.63)                                   |
| 14.7 <sup>+0.5</sup> (.58 <sup>+0.02</sup> ) | 14.7 <sup>+0.5</sup> (.58 <sup>+0.02</sup> ) | 14.7 <sup>+0.5</sup> (.58 <sup>+0.02</sup> ) | 14.7 <sup>+0.5</sup> (.58 <sup>+0.02</sup> ) |
| 0.35 (.014)                                  | 0.07 (.003)                                  | 0.35 (.014)                                  | 0.07 (.003)                                  |
| 1 (.04)                                      | 0.4 (.016)                                   | 1 (.04)                                      | 0.4 (.016)                                   |
| -20 to 85 (-4 to 185)                        | -20 to 85 (-4 to 185)                        | -20 to 85 (-4 to 185)                        | -20 to 85 (-4 to 185)                        |
| 5 x 10 <sup>6</sup>                          | 5 x 10 <sup>6</sup>                          | 5 x 10 <sup>6</sup>                          | 5 x 10 <sup>6</sup>                          |
| 0.4 (.016)                                   | 0.4 (.016)                                   | 0.4 (.016)                                   | 0.4 (.016)                                   |
| 30 (1.06)                                    | 30 (1.06)                                    | 30 (1.06)                                    | 30 (1.06)                                    |

| 2 |   |   |   |
|---|---|---|---|
| C | C | C | C |
| 3 |   |   |   |

|                  |   |   |   |                                             |
|------------------|---|---|---|---------------------------------------------|
| R                | R | R | R | (1) 83 169 0 Cable limits current to 8 Amps |
| L                | L | L | L |                                             |
| C <sup>(1)</sup> | C | C | C |                                             |
| 4                |   |   |   |                                             |

| R                            | A 79 215 740                       | B 70 507 524 | E 79 215 742                           | G 70 507 529 |
|------------------------------|------------------------------------|--------------|----------------------------------------|--------------|
| **Roller 139 EX R28.7 (1.13) | Flat 161 A R14.2 (.56) - R25.4 (1) |              | Roller 161 E R13.6 (.54) - R24.1 (.95) |              |
|                              |                                    |              |                                        |              |
| D                            | A                                  | B            | A                                      | B            |
| 2.5 (8.8)                    | 2.5 (8.8)                          | 4.2 (14.8)   | 2.5 (8.8)                              | 4.2 (14.8)   |
| 0.4 (1.4)                    | 0.5 (1.8)                          | 1 (3.5)      | 0.5 (1.8)                              | 1 (3.5)      |
| 1.2-0.5 (.047-.02)           | 0.8 (.032)                         | 0.4 (.016)   | 0.8 (.032)                             | 0.4 (.016)   |

| F 79 218 581                                                                        | H 79 218 651                                                                        |  |  |  |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--|--|--|
| Flat <b>161 F</b> R22.3 (.88)                                                       | Dummy roller <b>161 G</b> R21.8 (.86)                                               |  |  |  |
|  |  |  |  |  |
| A                                                                                   | B                                                                                   |  |  |  |
| 1.5 (5.3)                                                                           | 2.6 (9.2)                                                                           |  |  |  |
| 0.25 (.9)                                                                           | 0.5 (1.8)                                                                           |  |  |  |
| 16 (.63)                                                                            | 0.8 (.032)                                                                          |  |  |  |

| A         | B          |  |
|-----------|------------|--|
| 1.5 (5.3) | 2.6 (9.2)  |  |
| 0.25 (.9) | 0.5 (1.8)  |  |
| 16 (.63)  | 0.8 (.032) |  |

Ø

No Actuator

For more actuators  
see 83161

To order, please specify :

|                                      |                |               |                                                    |                  |                       |
|--------------------------------------|----------------|---------------|----------------------------------------------------|------------------|-----------------------|
| 1 Switch Type                        | 2 Contact Type | 3 Connections | 4 Length of Leads                                  | 5 Actuator       | 6 Actuator Position   |
| 831690<br>831694<br>831698<br>831699 | C              | R<br>L<br>C   | .5 - 1/2 meter (std)<br>1 - 1 meter<br>2 - 2 meter | Ø<br>A<br>B<br>H | E<br>F<br>G<br>P<br>R |

Example switch is: 831690, SPDT, leads exit right, .5 meter leads, with no actuator. To order actuators separately, use the 8 digit P/N.


Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com

## Sealed Miniature Switches


## Dimensions

## Output wires

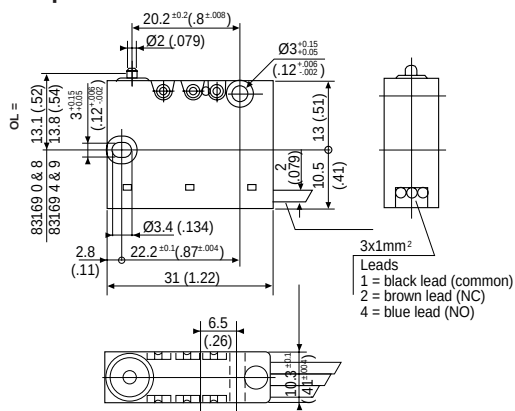


mm (in)

### Output cable

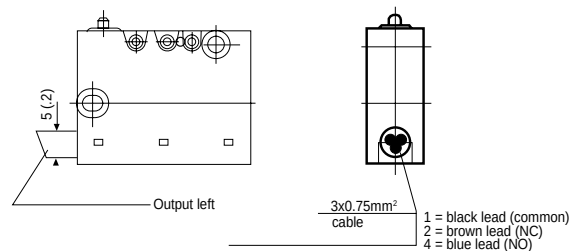


## Actuators


## Mounting position for factory mounted actuators




### Mounting position for factory or customer mounted actuators




**P**




## R




**A - B**




**E - G**



## F



## H




mm (in)

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

Low Force Position Detectors Series 81 290



- Conforms to standard DIN 43365 Form A
- Low activation force < 1.7 oz. (50 g @ at 6 bars) at 90 psi
- No continuous consumption of compressed air



Part numbers

|              |               |            |            |
|--------------|---------------|------------|------------|
| Contact type | (Form B) SPNC | 81 290 501 | —          |
|              | (Form A) SPNO | —          | 81 290 001 |

Symbol




Characteristics


|                                       |             |                          |             |                          |             |
|---------------------------------------|-------------|--------------------------|-------------|--------------------------|-------------|
| Orifice diameter                      | inches(mm)  | 5/64"                    | (2)         | 5/64"                    | (2)         |
| Operating pressure                    | psi(bar)    | 30 > 120                 | (2 > 8)     | 30 > 120                 | (2 > 8)     |
| Flow at 60 psi(4 bars)                | cfm(Nl/min) | 4.5                      | (130)       | 2.5                      | (>70)       |
| Activation force at 90 (6 bars)       | ounces(g)   | <1.7                     | (< 50)      | <1.7                     | (< 50)      |
| Permissible fluid: air, inert gases   |             |                          |             |                          |             |
| Max/min. of fluid temperatures        | °F(°C)      | +20> +120                | (-10 > +50) | +20> +120                | (-10 > +50) |
|                                       | °F(°C)      | +20> +140                | (-10 > +60) | +20> +140                | (-10 > +60) |
|                                       | °F(°C)      | +20> +160                | (-40 > +70) | +20> +160                | (-40 > +70) |
| Mechanical life at 90psi (6 bars)     | cycles      | 10 million               |             | 10 million               |             |
| Response on activation                | ms          | ≤ 15                     |             | ≤ 15                     |             |
| time on release                       | ms          | ≤ 15                     |             | ≤ 15                     |             |
| Barb connection for semi-rigid tubing | inches(mm)  | 0.106" I.D. x 5/32" O.D. | (2.7x4)     | 0.106" I.D. x 5/32" O.D. | (2.7x4)     |
| Weight                                | grams       | 8.5                      |             | 8.5                      |             |

Principle of NC operation

Deactivated

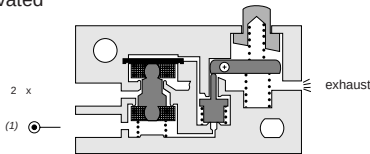


Activated




Operation accessories

Unless otherwise requested, flat and roller-ended actuators are supplied loose.


161 A  
flat  
79 215 741



161 E  
roller  
79 215 743




Dimensions

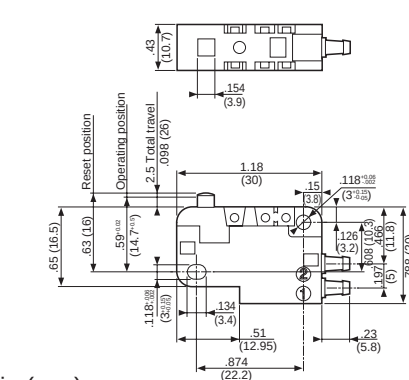


in (mm)

Use (metric) dimensions for critical data

161 A



161 E

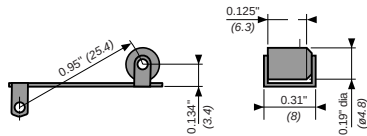

| Other information                                              | To order, specify :                                                                                                                                                                       |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| On request :<br>Wide range of actuators<br>Connectable exhaust | <div>Standard products</div> <div><div>1</div>Part number</div> <div><div>2</div>Accessory</div> <div>Example : Low force position detector 81 290 501<br/>Flat actuator 79 215 741</div> |

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com

These basic principles apply to all our precision switches. The specific characteristics of each model are given in more detail in the relevant production sections.


## Introduction

Our switches are high-precision, snap-action switches and these are a few of the key features which distinguish our switches:

- High ratings with small dimensions
- Very short travels
- Low operating forces
- Highly dependable force and travel values
- Long life
- Large range of actuators for easy adaptation to the most varied applications

## Switch construction

### Single-pole changeover switch (i.e. 83 161)

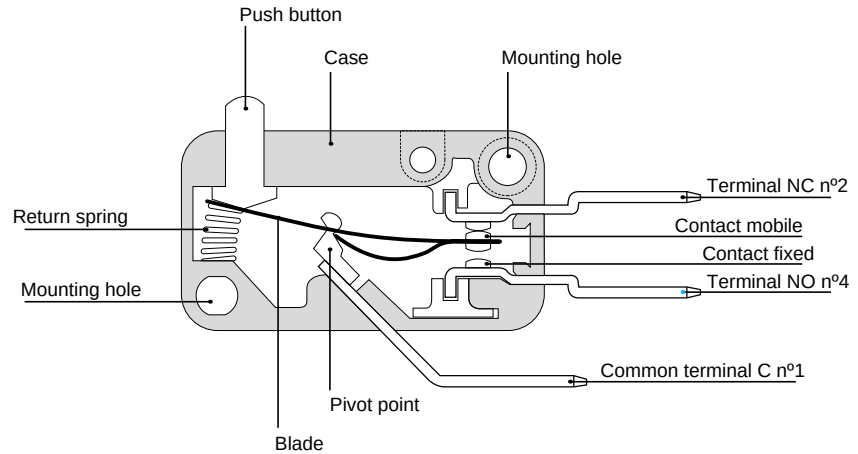

#### Electrical function SPDT (C)




#### Normally closed (NC)



#### Normally open (NO)



### Double-pole changeover switch (i.e. 83 132 0)

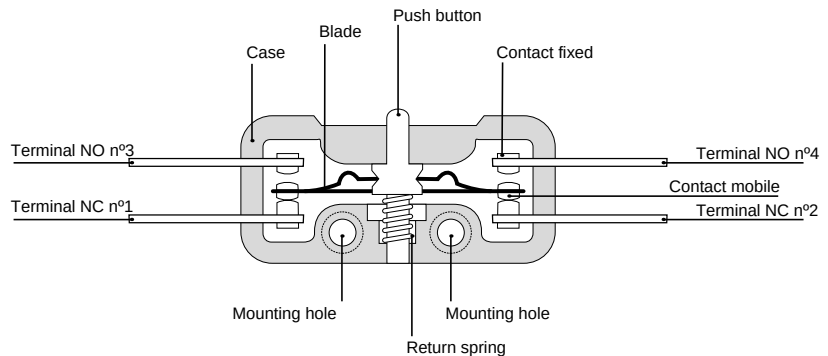

#### Electrical function SPDT (C)



#### Normally closed (NC)



#### Normally open (NO)



The NO and NC circuits must both be of the same polarity.

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

## Mechanical characteristics



### Terminology - Forces - Positions - Travel

| Position of pushbutton |                                                                                                                                               |                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                            |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Electrical circuit     |                                                                                                                                               |                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                            |
| Forces                 |                                                                                                                                               | <b>OF Operating Force</b><br>Maximum force which must be applied to the operating device to displace the rest position RP to the tripping point TP. | <b>TTF Total travel force</b><br>Force required to displace the operating device from its rest position RP to its overtravel limit position. (We only specify this value if it is higher than the operating force. When not quoted, it is equal to or less than the operating force).<br><br><b>MOF Maximum overtravel force</b><br>The maximum force which can be applied to the operating device, without damaging it, in the end of travel position where it is in abutment internally or against the face of the case. | <b>RF Release force</b><br>Force to which the operating force must be reduced to allow the snap-action mechanism to return to its release position RLP.    |
| Positions              | <b>RP Rest position</b><br>Position of the operating device when no external mechanical force is applied. Also described as "height at rest". | <b>TP Tripping point</b><br>Position of the operating device relative to the fixing point (hole, face) at the moment when the microswitch trips.    | <b>OL Overtravel limit</b><br>Position of the operating device when an extreme force has moved it to the effective end of the available travel.                                                                                                                                                                                                                                                                                                                                                                            | <b>RLP Release position</b><br>Position of the operating device at the moment when the snap-action mechanism trips on its return to its original position. |
| Travel                 |                                                                                                                                               | <b>PT Pre-travel</b><br>Distance between the rest position RP and the tripping point TP.                                                            | <b>OT Overtravel</b><br>Distance between the tripping point TP and the overtravel limit OL.                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>DT Differential travel</b><br>Distance between the tripping point TP and the release position RLP.                                                      |

The reference point for the figures given for travel and forces is a point F situated on the button in the case of a plain microswitch, or, generally, 3 mm in from the end of a plain actuator. The reference point for the positions is one of the fixing holes, unless otherwise indicated.

### Graphs of forces vs. travel

Operating force (external) applied to the operating device

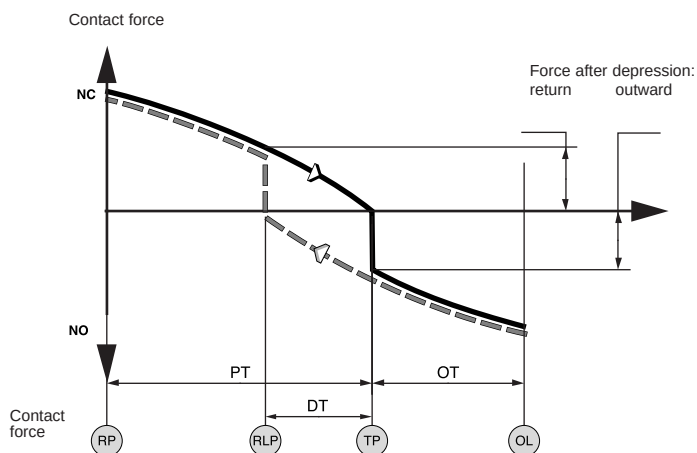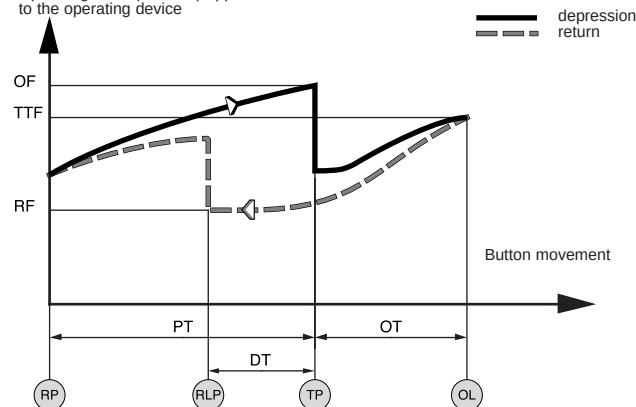

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



## Mechanical characteristics

### Changeover time

This is the time taken by the mobile contact when moving from one fixed contact to another until it becomes fully stable (contact bounce included). This time is a function of the contact gap, the mechanical characteristics of the snap action and the mass of the mobile element. However, thanks to the snap-action mechanisms employed, the time is largely independent of the speed of operation. It is normally less than 20 milliseconds (including bounce times of less than 5 ms).

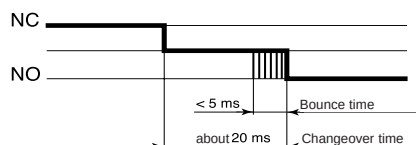

### Mechanical durability

This is an average value indicating the purely mechanical performance of a switch when not subject to any electrical load. It may be useful for evaluation purposes in cases where the power levels involved are very low and the electrical life is thus close to the mechanical life.

### Maximum speed and rate of operation

Our switches will work at speeds of operation varying over a very wide range : normally from 1 mm/min to 1 ms. The maximum rate of operation with a low electrical load may be as high as 10 operations/second.

### Mounting - Operation

- To conform to the leakage paths and air gaps in the standard EEC24 - EN/IEC 61058 - EN/IEC 60947:
- An insulation pad must be inserted between the switch and the fixing surface if the latter is metal.
- Manual operation of a metal actuator must only be carried out with the help of a secondary actuator made of insulating materials.
- The installer must ensure adequate protection against direct contact with the output terminals.

### Fixing - Screw torque

- Unless otherwise indicated in the mechanical characteristics table, the torque required for the fixing screws must conform to the following values :

| Ø of fixing screw            | 2  | 2.5 | 3  | 3.5 | 4   |
|------------------------------|----|-----|----|-----|-----|
| Screw torque maximum in cm.N | 25 | 35  | 60 | 100 | 150 |
| minimum                      | 15 | 25  | 40 | 60  | 100 |

## Environmental conditions

### Resistance to shocks and vibrations

Resistance to impact and vibration depends on the mass of the moving parts and on the forces holding the contacts together.

Generally speaking, for a switch without an actuator :

- Vibration >10 G 10 at 500 Hz
- Impact > 50 G 11 ms 1/2 sine-wave

Further information on request.

### Ambient operating temperature

The maximum and minimum temperatures at which the mechanical and electrical characteristics of the switch will remain substantially unaltered.

### Degree of protection

Under the IEC 529 or NFC 20010 classification scheme, standards employ an IP code to define the degree or class of protection which electrical equipment provides against access to live components, the entry of solid foreign bodies and ingress of water.

| 1st numeral                                                             |                                                          |  |
|-------------------------------------------------------------------------|----------------------------------------------------------|--|
| Protection equipment provides against the entry of solid foreign bodies | Protection for persons against access to dangerous parts |  |
| 0 (not protected)                                                       | (not protected)                                          |  |
| 4 diameter $\geq 1$ mm                                                  | 1 mm Ø wire                                              |  |
| 5 protected against dust                                                | 1 mm Ø wire                                              |  |
| 6 sealed against dust                                                   | 1 mm Ø wire                                              |  |

| 2nd numeral                                            |  |
|--------------------------------------------------------|--|
| Protection equipment provides against ingress of water |  |
| 0 (not protected)                                      |  |
| 4 splashed water                                       |  |
| 5 hosed water                                          |  |
| 6 high-pressure hosed water                            |  |
| 7 temporary immersion                                  |  |
| 8 prolonged immersion                                  |  |

Under this classification, our switches come within the following categories :

- Plain switches = IP 00
- Protected switches = IP 40 with isolated connection
- Sealed switches = IP 66 or IP 67

## Dielectric characteristics

### Current rating


This is the current the switch is capable of making and breaking which forms the basis for the life tests.

### Thermal rating

This is the current the switch will withstand when not being operated, for a temperature rise of not more than 60 °C.

### Switch rating


AC voltages: see the current rating.  
With DC voltages the switch rating is very much dependent on the voltage, the contact gap (CG) and the nature of the load being switched. There is a risk of prolonged or indeed permanent arcing if the following limits are exceeded:

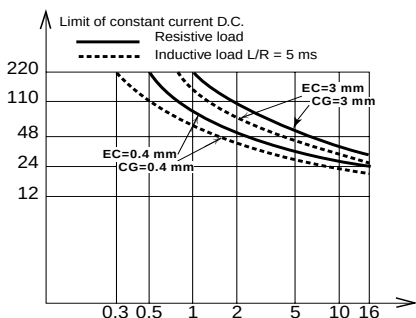

For special applications, please enquire.

### Operating curves

These indicate the electrical life of the switches, under standard conditions (20 °C, 1 cycle/2 seconds), by showing the number of switching operations which can be performed with given types of load.

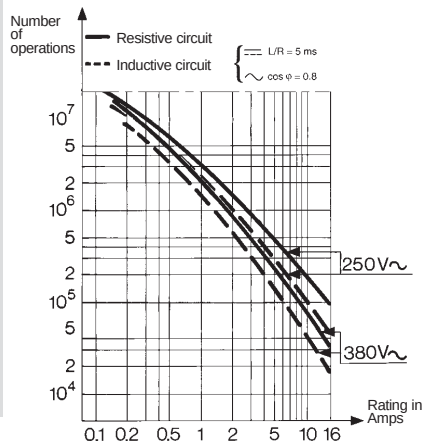


Products and specifications subject to change without notice.

## Circuit types




### Resistive circuit

For a circuit with alternating voltage, this is in phase with the current :  $\cos \phi = 1$ .





### Inductive circuit

A circuit of this type with direct current is characterised by a time constant.  
An inductive circuit, with alternating voltage, for example, incorporating a motor ( $\cos \phi < 1$ ) can cause current surges up to 6 times the normal current. For certain switches, we give electrical endurance curves with  $\frac{L}{R} = 5 \text{ ms}$  in DC and  $\cos \phi = 0.8$  in AC.




### Lamp and capacitance circuit

The currents at the time when the circuit is closed are very high in this case, being up to 10 times the nominal figure.




### Internal resistance

This consists of the intrinsic resistance (fixed) of the parts carrying current and the contact resistance (variable).  
Close to the tripping point and release position, the force holding the contacts together drops considerably and this may cause a rise in internal resistance.




### Insulation resistance

The insulation resistance of the switches is generally greater than 50,000 MΩ measured at 500 V DC.



### Dielectric strength

The dielectric strength of our switches is generally better than:  
- 1500 volts between live parts and earth  
- 1000 volts between contacts  
- 600 volts between contacts for switches whose contact gap is less than 0.3 mm.



## Contact materials

### Choice of contact material

To choose the best material for the contacts there are various factors to be considered:

- the current and voltages levels
- the type of load
- the number of operations
- the switching frequency
- the environmental conditions.

### Contacts for general-purpose use

Our switches are normally fitted with silver contacts. These are suitable for the majority of applications and provide the best compromise between electrical performance, thermal performance and life.

### Contacts for low-power circuits

$E < 20 \text{ V}$  and/or  $I < 100 \text{ mA}$

The contacts used in this case are plated with gold (or a gold alloy) for good reliability even in corrosive atmospheres.

### Contacts for special applications

We can supply special contacts suitable for particular applications, such as:

- Ag CdO contacts for very high drawn currents,
- Cross Bar gold-plated Ag Ni contacts which allow a very wide range of applications to be covered by a single type of switch.


## Electrical recommendations

### Inductive circuits

To increase the life of contacts and their DC rating, arcing on opening can be cut down by using the following circuits:



#### - for DC

Fast diode  $V_R > 5 \times V_{\text{nominal}}$   
 $I_{\text{nominal}} > 10 \times I_{\text{winding}}$





#### - for DC or AC

A - RC circuit across inductor  
 B - RC circuit across switch



$C \text{ (nF)} \sim 100 \times I_{\text{nominal}} \text{ (A)}$   
 $V_{\text{insulation}} > V_{\text{peak}}$   
 $R(\Omega) \sim \text{load resistance} (\Omega)$



C - Varistor circuit across load  
 D - Varistor circuit across switch  
 $V > V_{\text{peak supply}}$


$$E \text{ (J)} \geq \frac{P \text{ (V.A.)}}{100}$$

### Very low power circuits


In very low power circuits ( $I > 1 \text{ mA}$ ,  $V \leq 5 \text{ V}$ ), switching is highly sensitive to environmental conditions (the atmosphere, pollution).

If the supply is powerful enough, adding a passive resistor to increase the current broken by the switch to a few milliamps will substantially improve reliability of operation.

R - Load resistance  
 C - Very low current load



## Methods of actuation

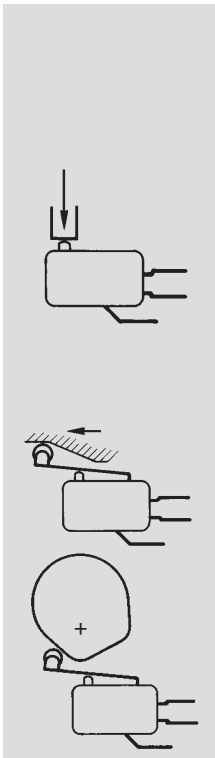

### Direct operation

Preferably, force should be directly applied to the device – the plunger – along its axis for operation. However, the majority of our microswitches will accept skewed operation provided the angle of application is not more than 45°.

The device used to apply the force must never hamper the travel of the plunger to the tripping point (TP). It must under all circumstances move the plunger through at least 0.5 times the overtravel (OT) quoted. Steps must also be taken to see that it does not cause the overtravel limit (OL) or maximum overtravel force (MOF) quoted to be overrun or exceeded.

### Operation by actuator

When operation is by a roller lever, force should preferably be applied in the direction shown on the left.

Where the movements involved are fast, the ramp should be so designed as to ensure that the operating device is not subjected to any violent impact or abrupt release.

## Quality

Quality is built into our switches from the initial design stage right through to the point where they are put into action at the customer's premises. All departments of the company are guided by the Quality Manual and the stipulations of the ISO 9000 international standard.

The location where the switches are manufactured (the la Plaine works at Valence) holds **ISO 9001** certification, guaranteeing a high standard of quality.

### Control procedures

Manufacturing quality of our switches is controlled systematically during assembly operations and on final completion. All our products are subjected to a final inspection, either at 100% on important characteristics, or according to the statistical sampling rules of French standards X 06-222 and X 06-023. The quality levels applied, for normal use such as defined in previous paragraphs are for the following defects, according to the standards :

- critical fault : NQA : 0.40
- major fault : NQA : 1
- minor fault : NQA : 2.5

At the customer's request, and for certain ranges of our products which must meet specific needs expressed in the specifications, it is always possible to adapt or create an inspection specification of a standard product.

## Standards - Approvals

Our switches are designed according to international recommendations (IEC), American standards (UL) and/or European standards (EN).


Proof of compliance with these standards and recommendations is demonstrated by:

- the manufacturer's declaration of conformity (drafted in accordance with the ISO/IEC 22 guidelines), or
- approval granted directly by an accredited body, or by application of the CCA (Cenelec Certification Agreement).

More detailed information on the approval for a particular type of microswitch can be obtained on request.

### The 83170 switch as an example

An 83 170 4 switch marked with the symbols for the European (according to CCA/MC12) and American approvals it holds.



## Rules and regulations

### EC directives

Our switches are compatible with European Community technical directive (Low Voltage) 73/23 and can be used within the framework of Machinery directive 83/392.

### Environmental protection

The modern concept of protection of the environment is an integral part of the manufacture of our switches, from product design through to packaging.