

# NCP5010EVB/D

## NCP5010 White LED Driver and DC/DC Boost Converter Evaluation Board



ON Semiconductor®

Prepared by: Hubert Grandry  
ON Semiconductor

<http://onsemi.com>

### EVALUATION BOARD MANUAL

#### Overview

The NCP5010 is a highly integrated 1 MHz inductive boost converter optimized for driving series configurations of LEDs in applications where space is a premium such as digital handsets and other portable electronics.

The intent of the demo boards is to illustrate typical operation of the device for laboratory characterization. There are 2 demo boards offered, the NCP5010EVB which configures the device driving a string of 2–5 White LEDs in series. In this configuration the NCP5010 is operated in a current regulation mode. The NCP5010BIASEVB showcases the device in a more traditional voltage feedback boost configuration for applications such as powering an OLED panel or LCD biasing. In addition to these demo boards, Application Note ANDXXXX/D deals with

configuring the NCP5010 with a high side sense resistor to drive LEDs in serial or parallel eliminating the need for a low side sense trace in the LCD module assembly.

#### Demo Board NCP5010EVB (White LED Driver)

Figure 1 is the schematic of the White LED Driver configuration where the feedback voltage node is connected to cathode of the last LED in the string and a sense resistor which is used to set the LED current. The sense resistor R1 or R2 + R3 are selected by J6 jumper. The NCP5010 step-up DC/DC converter controls the loop in order to maintain 500 mV at the feedback pin. Equation 1 is used to determine the value of the sense resistor for a specific current:

$$R_{FB} = \frac{FBV}{I_{OUT}} \quad (\text{eq. 1})$$

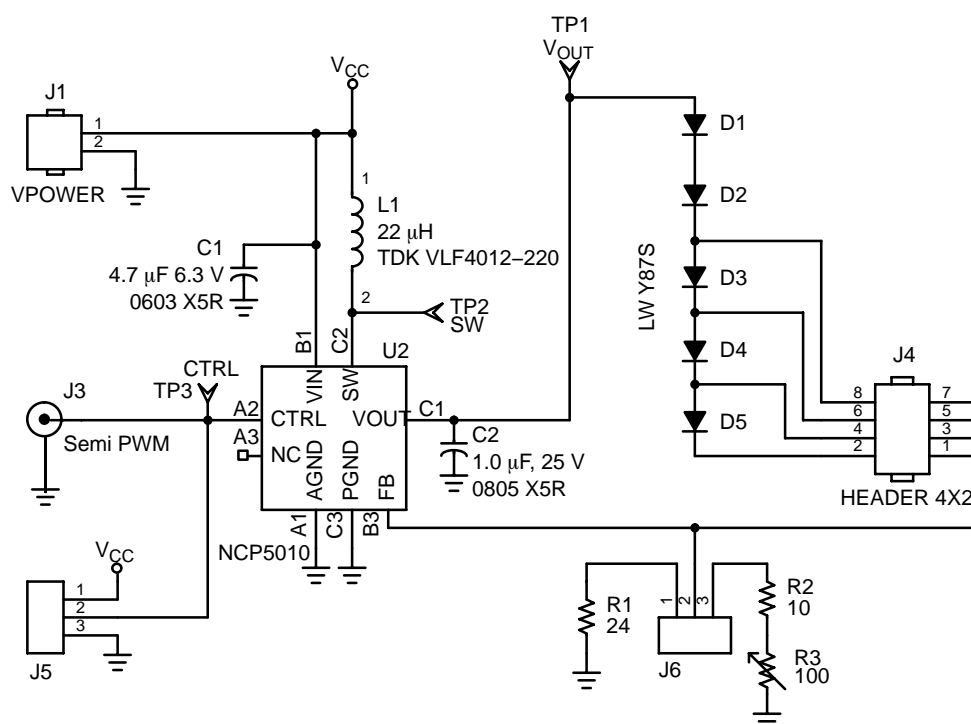


Figure 1. Schematic Diagram for Demo Board NCP5010EVB

## NCP5010EVB/D

### INPUT POWER

Symbol	Switch Descriptions
J1-1	This is the positive connection for power supply. The leads to the input supply should be twisted and kept as short as possible.
J1-2	This is the return connection for the power supply
J7	Ground clip

### SWITCHES SETUP

Symbol	Switch Descriptions
J3	<p>CTRL / Enable</p> <p>This jumper should be used to demonstrate PWM dimming of the LED string. In that case jumper J5 MUST be left open for proper operation.</p> <p>When a digital signal with a high state logic level of 1.2 V or greater is applied this will enable the boost converter. By varying the duty cycle of this signal, the average LED current can be reduced thus dimming the LEDs. The frequency of this signal should be between 100 and 1000 Hertz.</p>
J5	<p>CTRL / Enable:</p> <p>To enable the boost converter connect a shorting jumper between J5-1 and J5-2</p>
J4	<p>LEDs Selection:</p> <p>This header allows the user to select the number of LEDs in the string to be driven by the boost converter.</p> <p>Connect the shorting jumper between J4-7-8 to drive 2 LEDs</p> <p>Connect the shorting jumper between J4-5-6 to drive 3 LEDs</p> <p>Connect the shorting jumper between J4-3-4 to drive 4 LEDs</p> <p>Connect the shorting jumper between J4-1-2 to drive 5 LEDs</p> <p>If no jumper is inserted in J4, then the driver will operate in the OVP (Over Voltage Protection) mode.</p>
J6	<p>Current Selection:</p> <p>This jumper allows to select two different output current:</p> <p>Shorting jumper between J6-1 and J6-2 give a fixed output current determining by R1.</p> <p>Shorting jumper between J6-2 and J6-3 R3 allow adjusting the output current via potentiometer R3.</p>

# TYPICAL OPERATING CHARACTERISTICS

Condition: Efficiency =  $100 \times (\text{Number of LED stacked} \times V_{LED} \times I_{LED}) / P_{IN}$

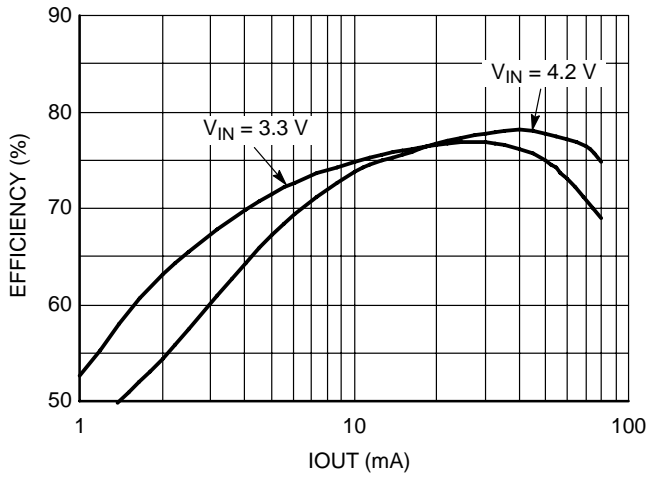


Figure 2. Efficiency vs. Current @ 2 LEDS (7.0 V)

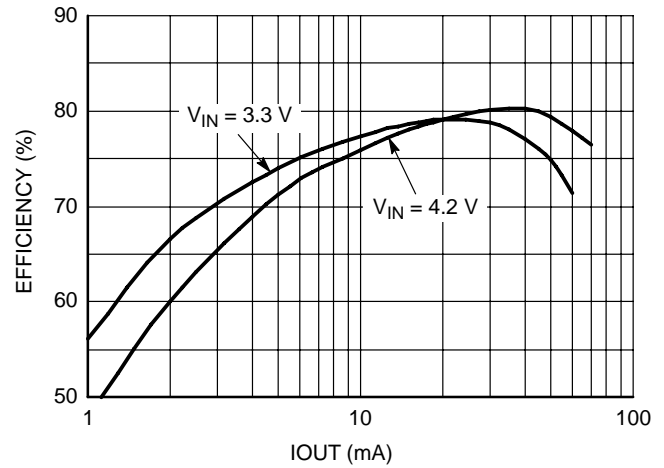


Figure 3. Efficiency vs. Current @ 3 LEDS (10.5 V)

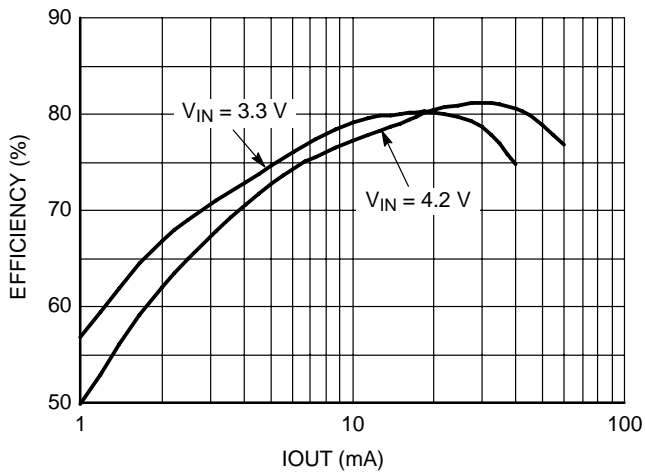


Figure 4. Efficiency vs. Current @ 4 LEDS (14 V)

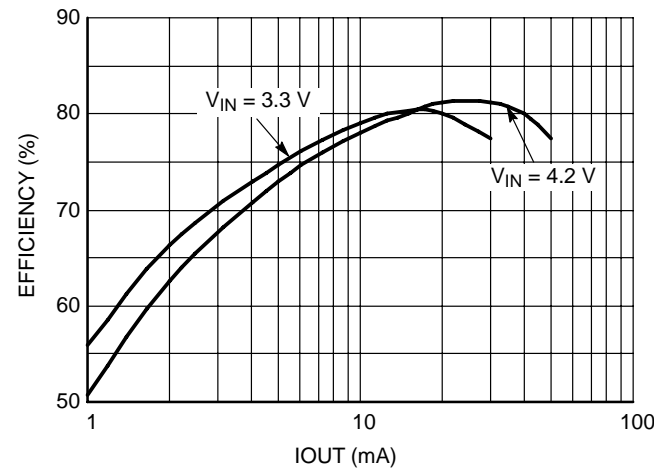


Figure 5. Efficiency vs. Current @ 5 LEDS (17.5 V)

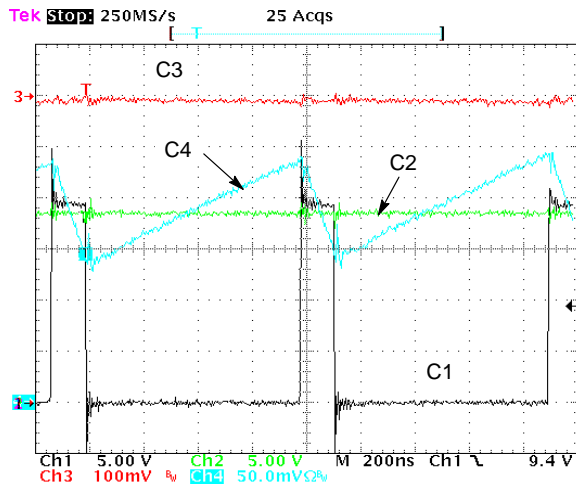


Figure 6. Ch1 SW, 5 V/div DC, Ch2 Vout, 5 V/div DC, Ch3 Vfb 100 mV/div DC, Ch4 Inductor Current 50 mA/div DC, T = 200 ns/div

# NCP5010EVB/D

## PCB LAYOUT

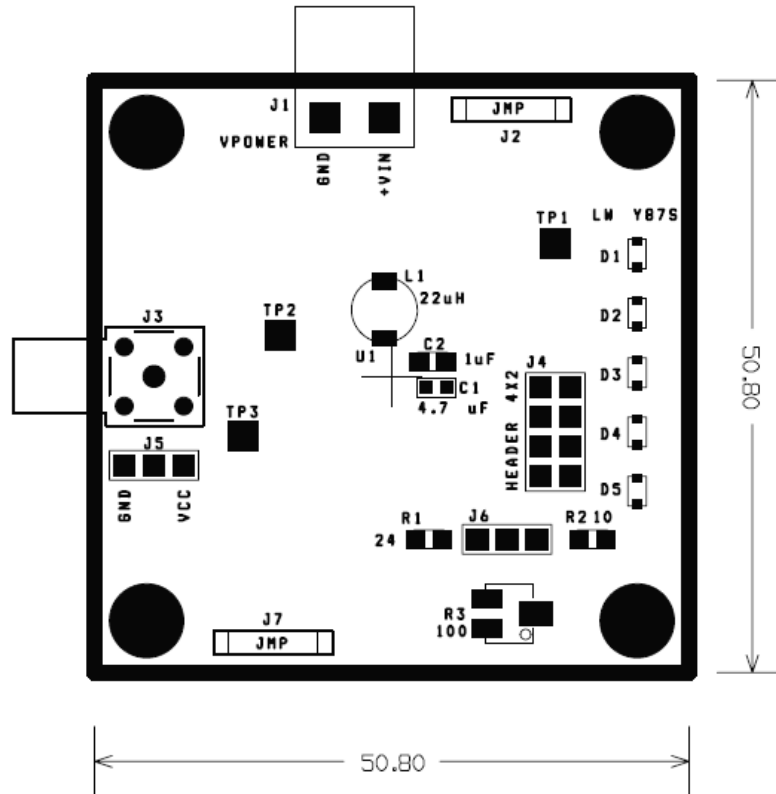


Figure 7. Assembly Layer

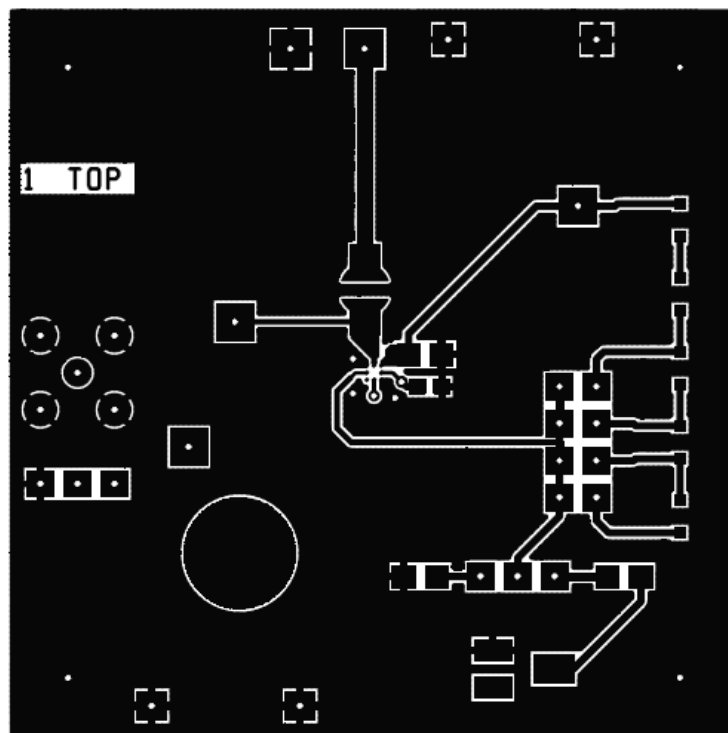


Figure 8. Top Layer Routing

# NCP5010EVB/D

## DEMONSTRATION BOARD BILL OF MATERIALS

Qty.	Ref Des.	Description	Size	Manufacturer	Part Number
1	U1	500 mW Boost LED Driver	8-Pin 1.7x1.7 mm Flip-Chip	ON Semiconductor	NCP5010FCT1G
1	C1	Capacitor, Ceramic, 4.7 $\mu$ F 6.3 V	0603	TDK	C1608X5R0J475MT
1	C2	Capacitor, Ceramic, 1 $\mu$ F, 25 V, X5R	0805	TDK	C2012X5R1E105MT
5	D1,D2,D3, D4,D5	White LED, SMT	1.2 x 2.2 mm	OSRAM	LW Y87S
1	J1	Mal SL5.08/2/90B plus Fem BLZ 5.08/2		Weidmuller	SL5.08/2/90B + BLZ 5.08/2
1	J4	Header 2x4 pin, 100 mil spacing	0.200 x 4	Kontek Comatel	4731955180470
1	J3	SMA or SMB connector (Option)		Radiall	R 114 665
2	J5,J6	Header 3 pin, 100 mil spacing	0.100 x 3		4711955140470
2	J2,J7	GND Connection		Std	Std
1	L1	Inductor, SMT, 22 $\mu$ H, 520 mA, 710 m $\Omega$	3.8 x 4.0 mm	TDK	VL4012AT-220MR51
1	R1	Resistor, chip, 24 $\Omega$ , 5%	0805	Std	Std
1	R2	Resistor, chip, 10 $\Omega$ , 5%	0805	Std	Std
1	R3	Adjustable Resistor, 100 $\Omega$		BOURNS	3224W -1- 101
1	TP1,TP2, TP3	Test point		Std	Std
1	PCB	PCB 2.0 in x 2.0 in x 1.0 mm, 4 Layer		Any	TLS-P-001-C-0304-HG

## Demo Board NCP5010BIASEVB (DC/DC Boost Converter)

Figure 12 is the schematic of the NCP5010 configured to provide a constant voltage. Here the network divider R2/R4 is used to sampling the output voltage and provide feedback voltage to the FB input.

The Equation 2 is used to determine the value of  $V_{OUT}$ .

$$V_{OUT} = V_{FB} \times \left( \frac{R2 + R4}{R2} \right) \quad (\text{eq. 2})$$

For example, should one need a  $V_{OUT}$  of 15 V. If we fix one of them like  $R2 = 10 \text{ k}\Omega$ , the value of  $R4$  is given by:

$$R4 = R2 \left( \frac{V_{OUT} - V_{FB}}{V_{FB}} \right) \quad (\text{eq. 3})$$

$$R4 = 10^3 \times \left( \frac{15 - 0.5}{0.5} \right) = 287 \text{ k}\Omega \quad (\text{eq. 4})$$

Then choose a standard value that is close to the above-calculated value.

$R2$  should be 2.2 to 22  $\text{k}\Omega$  and  $R4$  lower than 1  $\text{M}\Omega$ .

The NCP5010 has built in short circuit protection so when the converter is started by a high logic signal on the CTRL pin a small current source (10 mA nominal) charges the output capacitor ( $C2$ ) up to 66 % of  $V_{IN}$  at which point the DC/DC boost converter enters the switching mode. Care must be observed to ensure that the load does not sink more than 2 mA during this phase until the output reaches 0.66  $V_{IN}$  (nom) to allow proper startup of the converter.

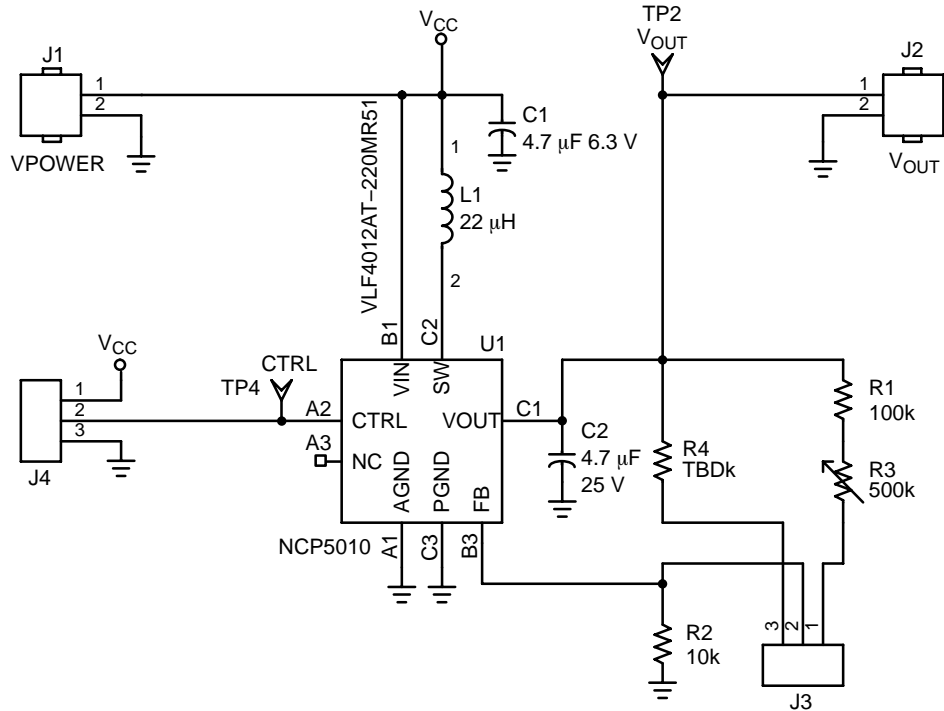


Figure 9. Schematic Diagram for Demo Board NCP5010BIASEVB

## NCP5010EVB/D

### INPUT and OUTPUT POWER

Symbol	Switch Descriptions
J1-1	This is the positive connection for power supply. The leads to the input supply should be twisted and kept as short as possible.
J1-2	This is the return connection for the power supply
J6	Ground clip
J2-1	Ground of the load connection
J2-2	This is the output positive connection for the DC/DC boost converter

### SWITCHES SETUP

Symbol	Switch Descriptions
J4	CTRL / Enable: To enable the boost converter connect a shorting jumper between J4-1 and J4-2
J3	Voltage Selection: This jumper allows to select two different output voltage: Shorting jumper between J6-2 and J6-3 give a fixed output voltage setup by R2/R4. Shorting jumper between J6-1 and J6-2 R3 allow adjusting the output voltage.

TYPICAL OPERATING CHARACTERISTICS

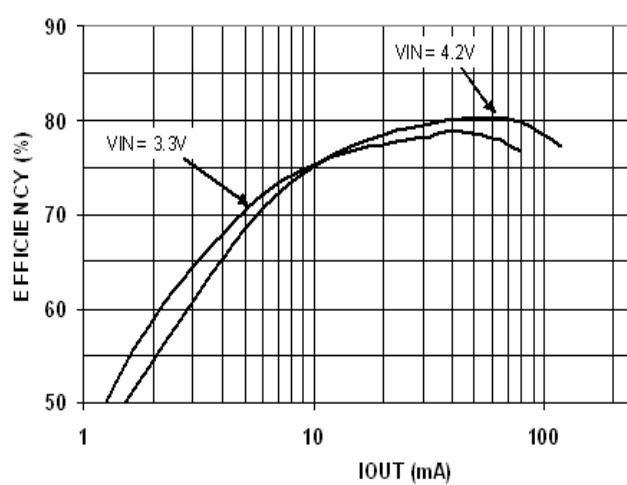


Figure 10. Efficiency vs.  $I_{OUT}$   
 $V_{OUT} = 6.0\text{ V}$ ,  $L = 10\text{ }\mu\text{H}$ , VLF 4012-100

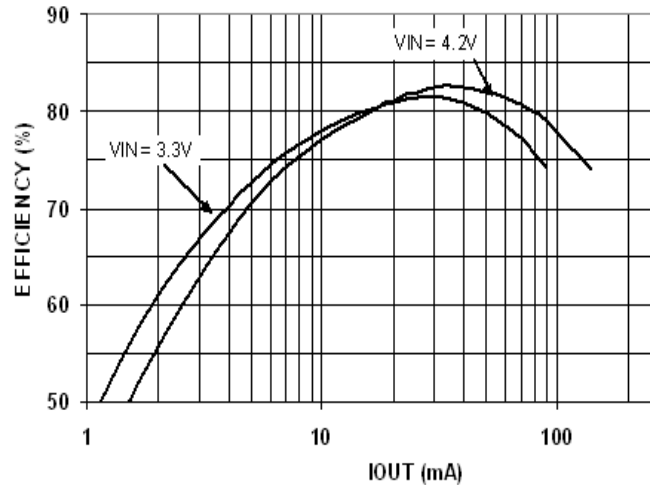


Figure 11. Efficiency vs.  $I_{OUT}$   
 $V_{OUT} = 6.0\text{ V}$ ,  $L = 22\text{ }\mu\text{H}$ , VLF 4012-220

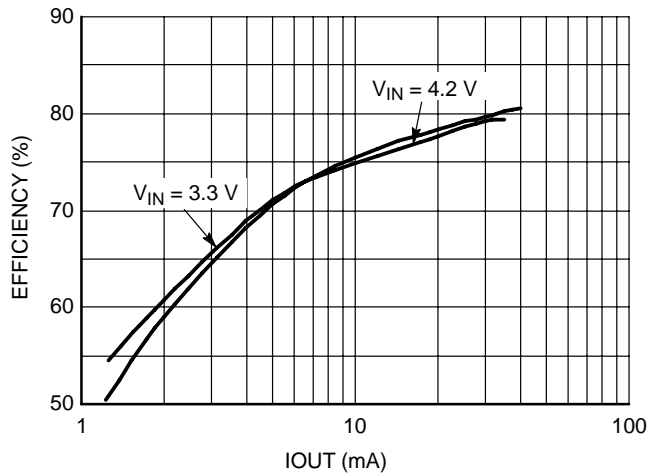


Figure 12. Efficiency vs.  $I_{OUT}$   
 $V_{OUT} = 12\text{ V}$ ,  $L = 10\text{ }\mu\text{H}$ , VLF 4012-100

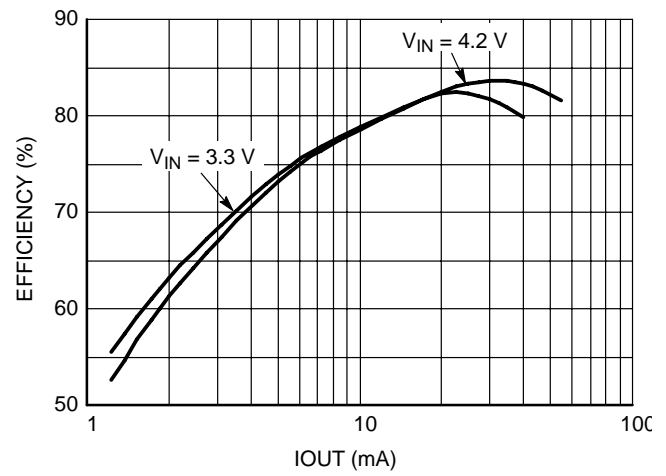


Figure 13. Efficiency vs.  $I_{OUT}$   
 $V_{OUT} = 12\text{ V}$ ,  $L = 22\text{ }\mu\text{H}$ , VLF 4012-220

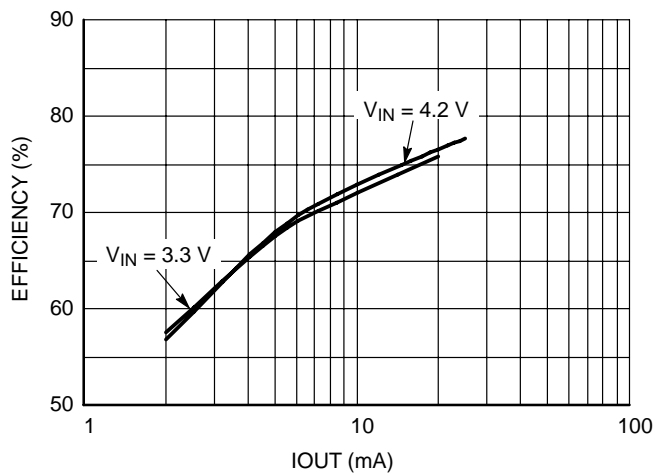


Figure 14. Efficiency vs.  $I_{OUT}$   
 $V_{OUT} = 18\text{ V}$ ,  $L = 10\text{ }\mu\text{H}$ , VLF 4012-100

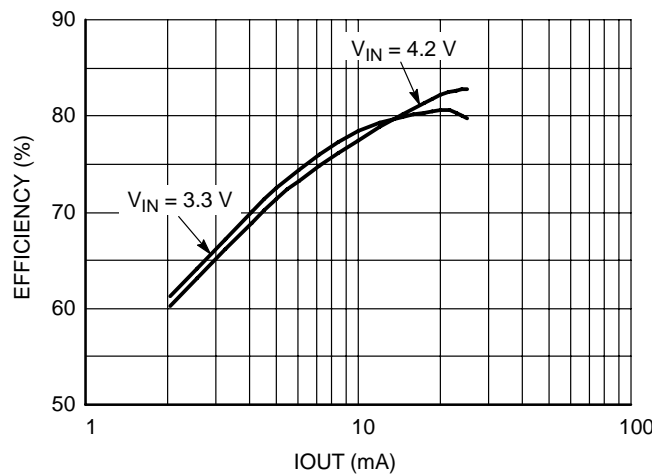


Figure 15. Efficiency vs.  $I_{OUT}$   
 $V_{OUT} = 18\text{ V}$ ,  $L = 22\text{ }\mu\text{H}$ , VLF 4012-220



TYPICAL OPERATING CHARACTERISTICS

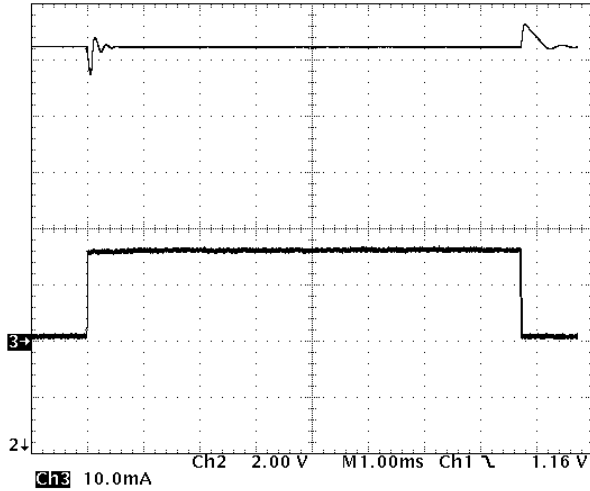


Figure 16. Load Transient Response,  $I_{OUT}$  0 to 20 mA  
2  $V_{OUT}$ , 2V/div DC, 3  $I_{OUT}$ , 10mA/div DC,  $T = 1$  ms/div

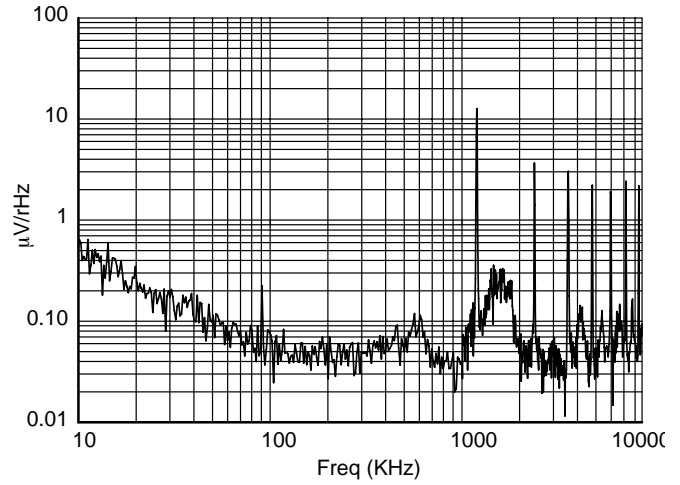


Figure 17. Output Switching Noise  $V_{IN} = 3.7$  V,  
 $V_{OUT} = 15$  V / 35 mA  $L = 22$   $\mu$ H VLF 4012-220

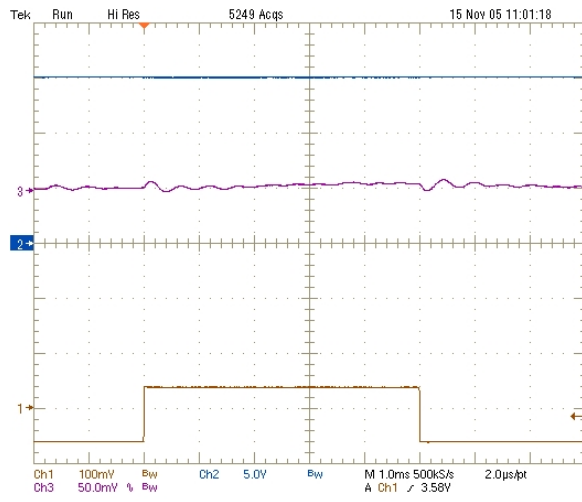


Figure 18. Line Transient Rejection, 1  $V_{IN}$  3.5 to 3.7 V,  
2  $V_{OUT}$ , 5V/div DC, 3  $I_{OUT}$ , 50mA/div AC,  $T = 1$  ms/div

PCB LAYOUT

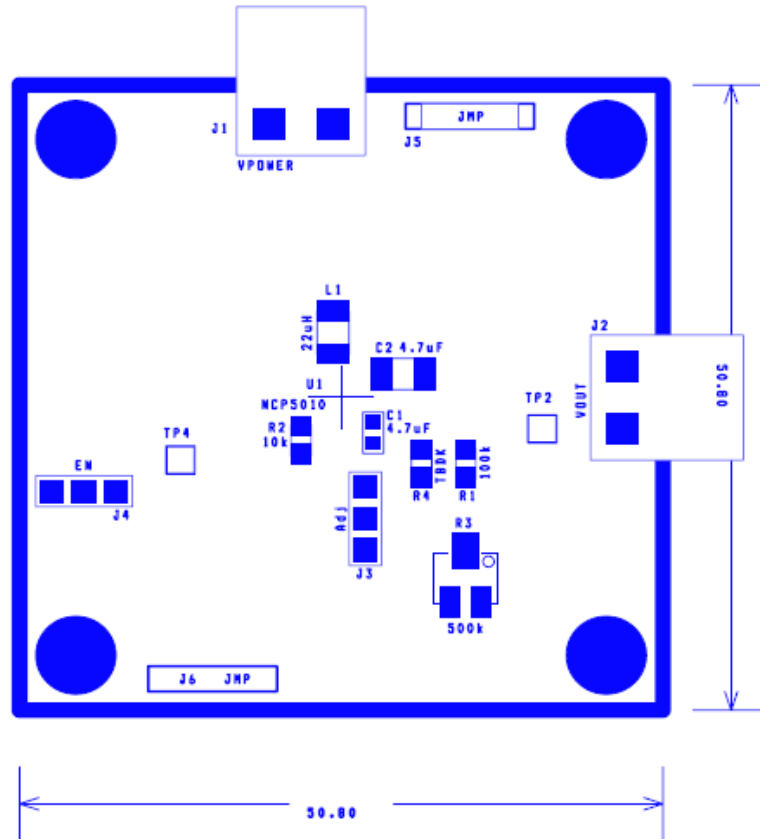


Figure 19. Assembly Layer

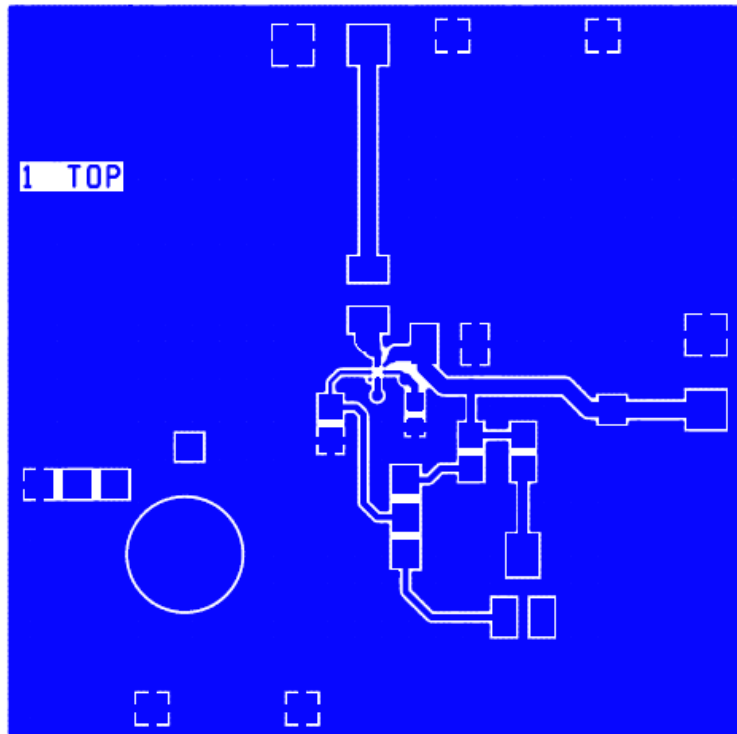



Figure 20. Top Layer Routing

# NCP5010EVBD

## DEMONSTRATION BOARD BILL OF MATERIALS

Qty.	Ref Des.	Description	Size	Manufacturer	Part Number
1	U1	500 mW Boost LED driver	8-Pin 1.7x1.7 mm Flip-chip	ON Semiconductor	NCP5010FCT1G
1	C1	Capacitor, Ceramic, 4.7 $\mu$ F 6.3 V	0603	TDK	C1608X5R0J475MT
1	C2	Capacitor, Ceramic, 4.7 $\mu$ F, 25 V, X5R, 20 % or 4.7 $\mu$ F, 16 V, X5R, 20%	0805	MURATA or TDK	GRM21BR61E475KA or C2012X5R1C475MT
2	J1, J2	Mal SL5.08/2/90B plus Fem BLZ 5.08/2		Weidmuller	SL5.08/2/90B + BLZ 5.08/2
2	J3, J4	Header 3 pin, 100 mil spacing	0.100 x 3		4711955140470
2	J5, J6	GND Connection		Std	Std
1	L1	Inductor, SMT, 22 $\mu$ H, 520 mA, 710 m $\Omega$	3.8 x 4.0 mm	TDK	VLF4012AT-220MR51
1	R1	Resistor, Chip, 100 k $\Omega$ , 5 %	0805	Std	Std
1	R2	Resistor, Chip, 10 k $\Omega$ , 5 %	0805	Std	Std
1	R3	Adjustable Resistor, 500 k $\Omega$		BOURNS	3224W -1- 504
1	R4	Resistor, Chip, TBD k $\Omega$	0805	Std	-
1	TP1, TP4	Test point		Std	Std
1	PCB	PCB 2.0 in x 2.0 in x 1.0 mm, 4 Layer		Any	TLS-P-002-B-0304-HG

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada

Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910

Japan Customer Focus Center  
Phone: 81-3-5773-3850

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ON Semiconductor:](#)

[NCP5010EVB](#)