




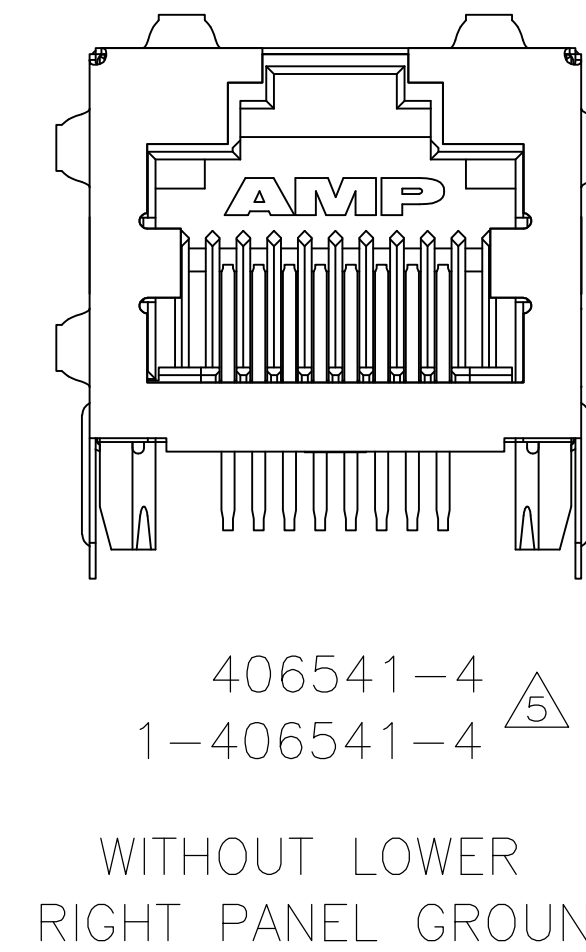

$-Z-$

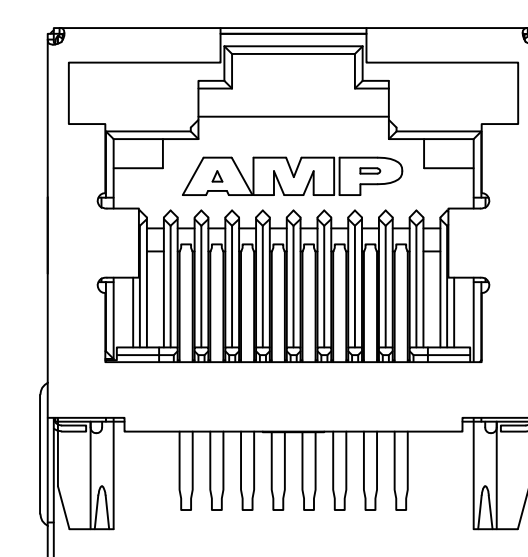


1-406541-7

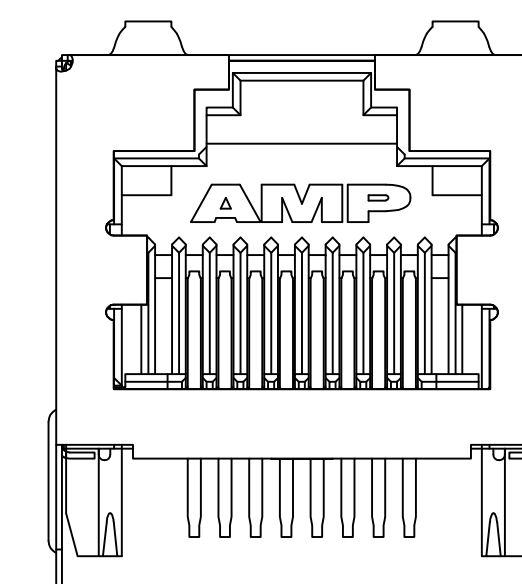

A detailed line drawing of an AMP connector. The connector has a rectangular body with a central slot. Inside the slot, the word "AMP" is printed in a stylized font. Below the slot, there are 12 pins arranged in a single row. The connector is shown from a top-down perspective.

2-406541-3

NARROW POST TYPE

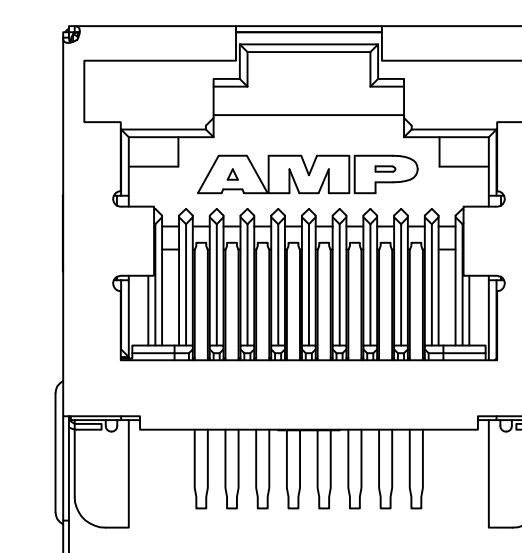

OBSELETE

MATTE TIN	TAPE/REEL	2	2.54[.100]	2-406541-4	
	TRAY	6	3.05[.120]	2-406541-3	
	TRAY	0	2.54[.100]	2-406541-2	
	TRAY	2	2.54[.100]	2-406541-1	
	TAPE/REEL	0	2.54[.100]	2-406541-0	
	TRAY	6	3.05[.120]	1-406541-9	
	TAPE/REEL	0	2.54[.100]	1-406541-8	
	TRAY	6	2.54[.100]	1-406541-7	
	TRAY	6	3.56[.140]	1-406541-6	
	TRAY	0	2.54[.100]	1-406541-5	
BRIGHT TIN-LEAD	TRAY	5	2.54[.100]	1-406541-4	
	TRAY	6	2.00[.079]	1-406541-3	
	TRAY	6	2.54[.100]	1-406541-1	
	TRAY	6	3.56[.140]	406541-6	
	TRAY	0	2.54[.100]	406541-5	
	TRAY	5	2.54[.100]	406541-4	
	TRAY	6	2.00[.079]	406541-3	
	TRAY	6	2.54[.100]	406541-1	
	TERMINAL PLATING	PACKAGING	PANEL GROUNDS	DIM A	PART NUMBER

△₈ 2-406541-0 , 2-2
NARROW POST TYPE

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN TS/LA MAYER		09JAN2008		 TE Connectivity	
		CHK J WESTMAN		09JAN2008			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S.FLICKINGER		NAME	
		0 PLC ± -		PRODUCT SPEC		INVERT MODULAR JACK ASSEMBLY 1 X 1, SHIELDED, PANEL GROUND -	
		1 PLC ± -		-			
		2 PLC ± 0.25 [010]		APPLICATION SPEC			
		3 PLC ± -				SIZE	
		4 L.A. ± -				CAGE CODE	
		ANGLES				DRAWING NO	
MATERIAL		FINISH		WEIGHT		A1 00779 C=406541	
SEE TABLE		SEE TABLE		-		-	
CUSTOMER DRAWING				SCALE		4:1	
				SHEET		1 of 1	
				REV		N	