
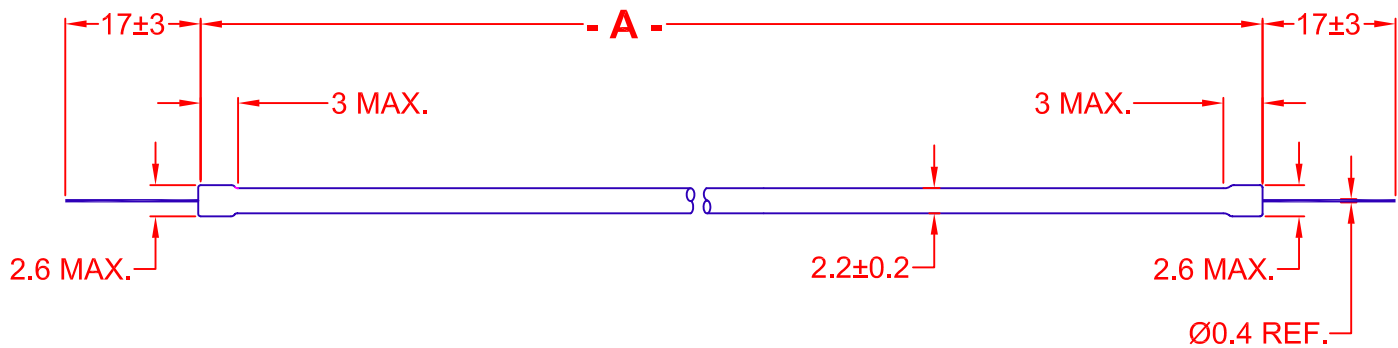


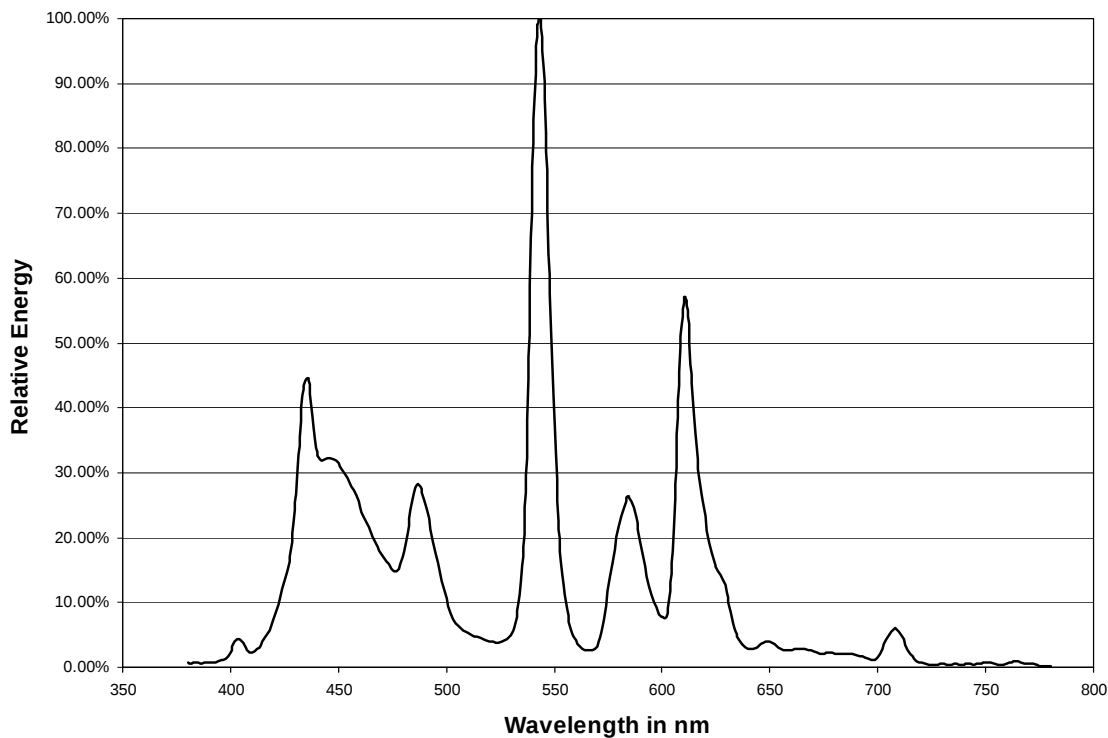

JKL PART NUMBER	- A - LENGTH	COLOR	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mAmps)	BRIGHTNESS (CANDELA/m2)	*RATED LIFE (HRS) TYPICAL
BF2261-24B	61±1.5	RGB HIGH OUTPUT WHITE 8400° KELVIN	600 @ 0°C	200	5 ± 1	38,000±10%	50,000
BF22140-24B	140±3.0		990 @ 0°C	330	5 ± 1	38,000±10%	50,000
BF22160-24B	160±3.0		1065 @ 0°C	355	5 ± 1	38,000±10%	50,000
BF22258-24B	258 ^{+3.0} _{-0.0}		1600 @ 0°C	535	5 ± 1	38,000±10%	50,000

*NOTE: RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OF THE INITIAL RATING.

			METRIC  THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.2 2 PL +/- 0 ANGLE +/- 0		JKL COMPONENTS CORPORATION TITLE MINIATURE COLD CATHODE FLUORESCENT LAMP				
D	RATED LIFE HRS. TO TYPICAL & 20,000 TO 50,000	8/19/09	DRAWN BY L. WENGSTROM	APPV'D BY L.R. DATE 8/19/09	SIZE A	FSCM NO. 55335	DRAWING NO. BF 22-24B				
C	ADD MINIMUM TO RATED LIFE HRS.	7/16/09									
B	ADD BF2261-24B	6/19/04									
A	CORRECTION ON LENGTH DIM.	10/7/03									
RELEASED TO CAD MULTI LIST			8/18/03								
REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE	- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED		SCALE NONE	RELEASED DATE 8/18/03	REVISION DATE 8/19/09	REV. NO. D	SHEET 1 OF 1		