
Sil-Pad® K-4

The Original Kapton®-Based Insulator

Features and Benefits

- Thermal impedance: 0.48°C-in²/W (@50 psi)
- Withstands high voltages
- · High dielectric strength
- Very durable



Sil-Pad K-4 uses a specially developed film which has high thermal conductivity, high dielectric strength and is very durable. Sil-Pad K-4 combines the thermal transfer properties of well-known Sil-Pad rubber with the physical properties of a film.

Sil-Pad K-4 is a durable insulator that withstands high voltages and requires no thermal grease to transfer heat. Sil-Pad K-4 is available in customized shapes and sizes.

| TYPICAL PROPERTIES OF SIL-PAD K-4 | | | | | | |
|---------------------------------------|-----------------------------------|------|------------------|------|-------------|------|
| PROPERTY | IMPERIAL VALUE | | METRIC VALUE | | TEST METHOD | |
| Color | Gray | | Gray | | Visual | |
| Reinforcement Carrier | Kapton | | Kapton | | _ | |
| Thickness (inch) / (mm) | 0.006 | | 0.152 | | ASTM D374 | |
| Hardness (Shore A) | 90 | | 90 | | ASTM D2240 | |
| Breaking Strength (lbs/inch) / (kN/m) | 30 | | 5 | | ASTM D1458 | |
| Elongation (%) | 40 | | 40 | | ASTM D412 | |
| Tensile Strength (psi) / (MPa) | 5000 | | 34 | | ASTM D412 | |
| Continuous Use Temp (°F) / (°C) | -76 to 356 | | -60 to 180 | | _ | |
| ELECTRICAL | | | | | | |
| Dielectric Breakdown Voltage (Vac) | 6000 | | 6000 | | ASTM D149 | |
| Dielectric Constant (1000 Hz) | 5.0 | | 5.0 | | ASTM D150 | |
| Volume Resistivity (Ohm-meter) | 10 ¹² | | 10 ¹² | | ASTM D257 | |
| Flame Rating | VTM-O | | VTM-O | | U.L.94 | |
| THERMAL | | | | | | |
| Thermal Conductivity (W/m-K) | 0.9 | | 0.9 | | ASTM D5470 | |
| THERMAL PERFORMANCE vs PRESSURE | | | | | | |
| Press | sure (psi) | 10 | 25 | 50 | 100 | 200 |
| TO-220 Thermal Performance | TO-220 Thermal Performance (°C/W) | | 3.43 | 3.13 | 2.74 | 2.42 |
| Thermal Impedance (°C-ir | 1 ² /W) (1) | 1.07 | 0.68 | 0.48 | 0.42 | 0.38 |

¹⁾ The ASTM D5470 test fixture was used. The recorded value includes interfacial thermal resistance. These values are provided for reference only. Actual application performance is directly related to the surface roughness, flatness and pressure applied

Typical Applications Include:

• Power supplies

Motor controls


• Power semiconductors

Configurations Available:

- Sheet form, die-cut parts and roll form
- With or without pressure sensitive adhesive

Building a Part Number

Standard Options

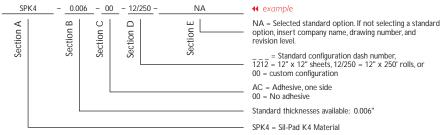

Note: To build a part number, visit our website at www.bergquistcompany.com.

Sil-Pad®: U.S. Patents 4,574,879; 4,602,125; 4,602,678; 4,685,987; 4,842,911 and others. Kapton® is a registered trademark of DuPont.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bergquist Company:

SPK4-0.006-00-54 SPK4-0.006-00-58 SPK4-0.006-00-138 SPK4-0.006-00-70