

SERIES

4212R
4212

RoHS
Compliant
Traditional
First Quality

Wound Beads

MINIMUM IMPEDANCE

DASH NUMBER*

FIGURE

TURNS

10 MHz

50 MHz

100 MHz

150 MHz

200 MHz


220 MHz

SERIES 4212R / 4212

-1	1-3	2 1/2	—	—	750	700	—	400
-2	1-3	2 1/2	325	—	575	525	—	—
-3	1-1	1 1/2	—	325	425	—	400	—
-4	1-1	1 1/2	170	320	375	—	—	—
-5	1-2	2	—	525	600	—	600	—
-6	1-2	2	240	520	480	—	—	—
-7	1-4	3	—	950	900	—	600	—
-8	1-4	3	400	800	550	—	—	—

*Complete part # must include series # PLUS the dash #

For surface finish information, refer to www.delevanfinishes.com

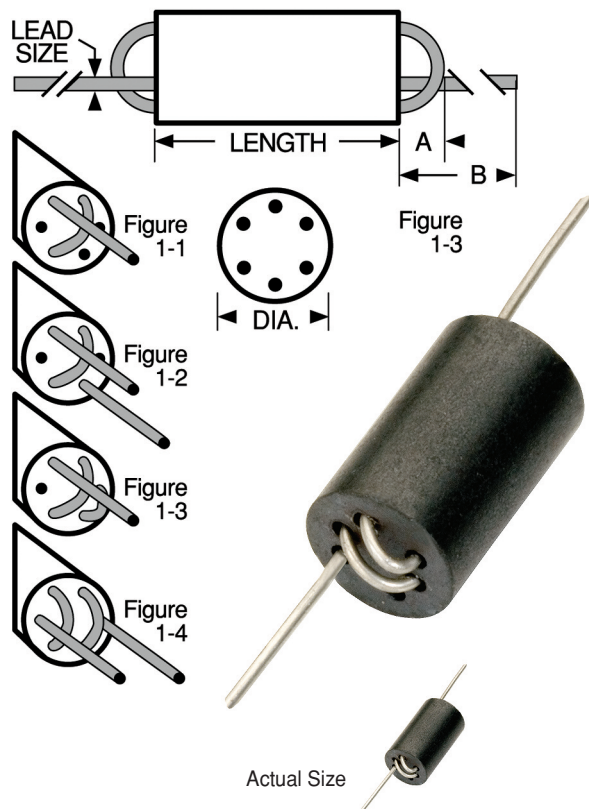

Physical Parameters

	Inches	Millimeters
Length	0.374 to 0.414	9.50 to 10.51
Diameter	0.216 to 0.256	5.48 to 6.35
Lead Size		
AWG #24 TCW	0.0185 to 0.0215	0.47 to 0.55
A	0.12 Max.	3.05 Max.
B	1.10 Min.	28.0 Min.

Impedances measured on HP 4191A Impedance Analyzer.

High resistivity ferrite material eliminates the need to insulate windings.

Lead Wire Plated copper

Packaging Bulk only

For more detailed graphs, contact factory

