

AA230-24


(Previously AD230-24)*

Features

- Attenuation in 4 dB steps to 28 dB with High Accuracy
- Low Cost SOIC-14 Plastic Package
- Low DC Power Consumption

Description

The AA230-24 is an IC FET digital attenuator consisting of three monolithic attenuators with LSB of 4 dB and a total attenuation of 28 dB with all attenuators connected. Attenuators are switched with -5 and 0 V. The AA230-24 is particularly suited where high attenuation accuracy, low insertion loss and low intermodulation products are required. Typical applications include cellular radio, wireless data, wireless local loop and other gain level control circuits.

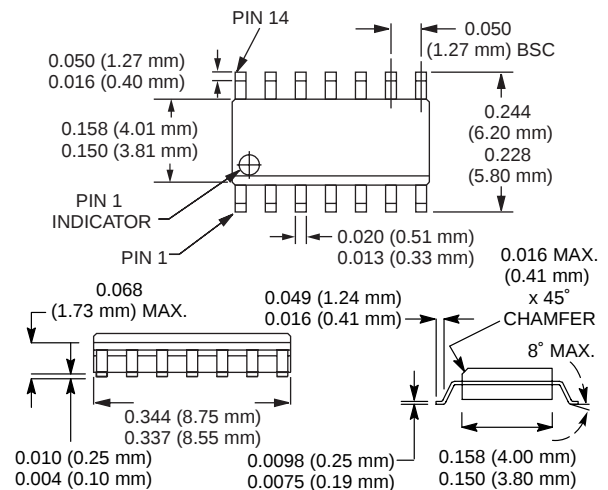SOIC-14

Electrical Specifications at 25°C (0, -5 V)

Parameter ¹	Frequency ²	Min.	Typ.	Max.	Unit
Insertion Loss ³	DC–0.1 GHz		1.1	1.4	dB
	DC–0.5 GHz		1.2	1.5	dB
	DC–1.0 GHz		1.3	1.7	dB
	DC–2.0 GHz		1.9	2.3	dB
Attenuation Range			28		dB
Attenuation Accuracy ⁴	DC–1.0 GHz	± (0.2 + 3% of Attenuation Setting in dB)			dB
	DC–2.0 GHz	± (0.4 + 5% of Attenuation Setting in dB)			dB
VSWR (I/O)	DC–2.0 GHz		1.3:1	1.5:1	

Operating Characteristics at 25°C (0, -5 V)

Parameter	Condition	Frequency	Min.	Typ.	Max.	Unit
Switching Characteristics ⁵	Rise, Fall (10/90% or 90/10% RF) On, Off (50% CTL to 90/10% RF) Video Feedthru			15 25 25		ns ns mV
Input Power for 1 dB Compression		0.50–2.0 GHz 0.05 GHz		+28 +22		dBm dBm
Intermodulation Intercept Point (IP3)	For Two-tone Input Power +5 dBm	0.50–2.0 GHz 0.05 GHz		+48 +38		dBm dBm
Control Voltages	V _{Low} = 0 to -0.2 V @ 20 µA Max. V _{High} = -5 V @ 50 µA Typ. to -8 V @ 200 µA Max.					

1. All measurements made in a 50 Ω system, unless otherwise specified.

1. All the cases are the same.
2. $DC = 300 \text{ kHz}$.


2. DC = 500 kHz.
3. Insertion loss changes by 0.003 dB/°C.

4. Attenuation referenced to insertion loss.


5. Video feedthru measured with 1 ns risetime pulse and 500 MHz bandwidth.

*Due to conflict with another company's product numbering system, Alpha's attenuator products starting with the letters "AD" are being changed to "AA".


Typical Performance Data (0, -5 V)

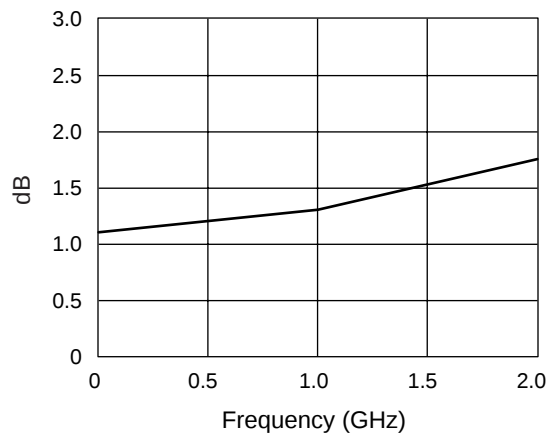

Insertion Loss vs. Frequency

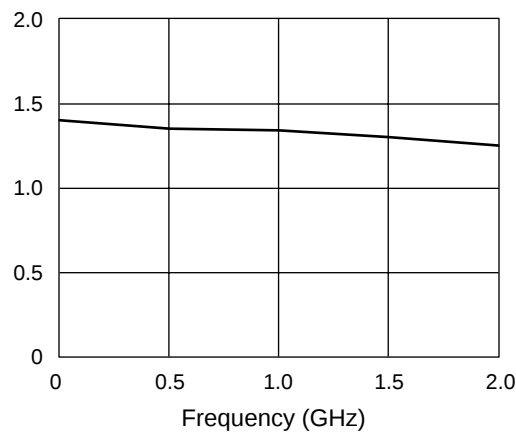

VSWR vs. Frequency (All States)

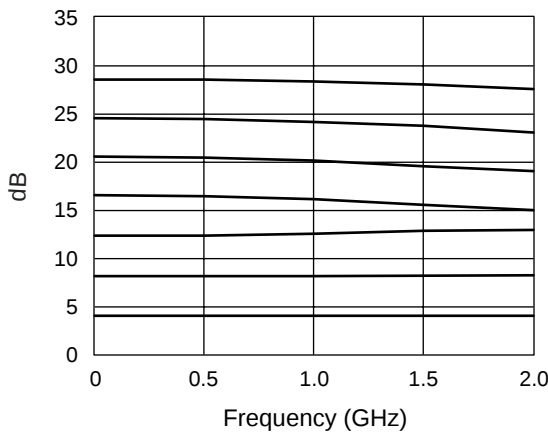

Attenuation vs. Frequency (All States)

Truth Table

V ₁	V ₂	V ₃	V ₄	V ₅	V ₆	Attenuation J ₁ –J ₂
4 dB		8 dB		16 dB		Reference I.L.
-5	0	-5	0	-5	0	
0	-5	-5	0	-5	0	4 dB
-5	0	0	-5	-5	0	8 dB
-5	0	-5	0	0	-5	16 dB
0	-5	0	-5	0	-5	28 dB

Absolute Maximum Ratings

Characteristic	Value
RF Input Power	2 W > 500 MHz 0/-8 V 0.5 W @ 50 MHz 0/-8 V
Control Voltage	+0.2 V, -8 V
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C

Note: Exceeding these parameters may cause irreversible damage.

Pin Out

