




3	5	Signal contact	P0 / Brass	AuroPur / AWG 20
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C - +130°C)	green
No.	St.	Part	Type Description/Colour/Class	
			TITLE	
			SCALE	
			ISO 2768-m	
			tolerance acc. to	
			NAME / DATE	
			sschref	
			DRAWN	
			22-04-2010	
			bigli.rneder	
			23-04-2010	
			CHECKED	
			23-04-2010	
			REPLACEMENT FOR:	
1	REV.	DATE	CH.-NO.	DWG.NO.
				FM9W4PA-K120
				REV.
				1
				PAGES
				1

D-Sub Mixed-Layout Connector

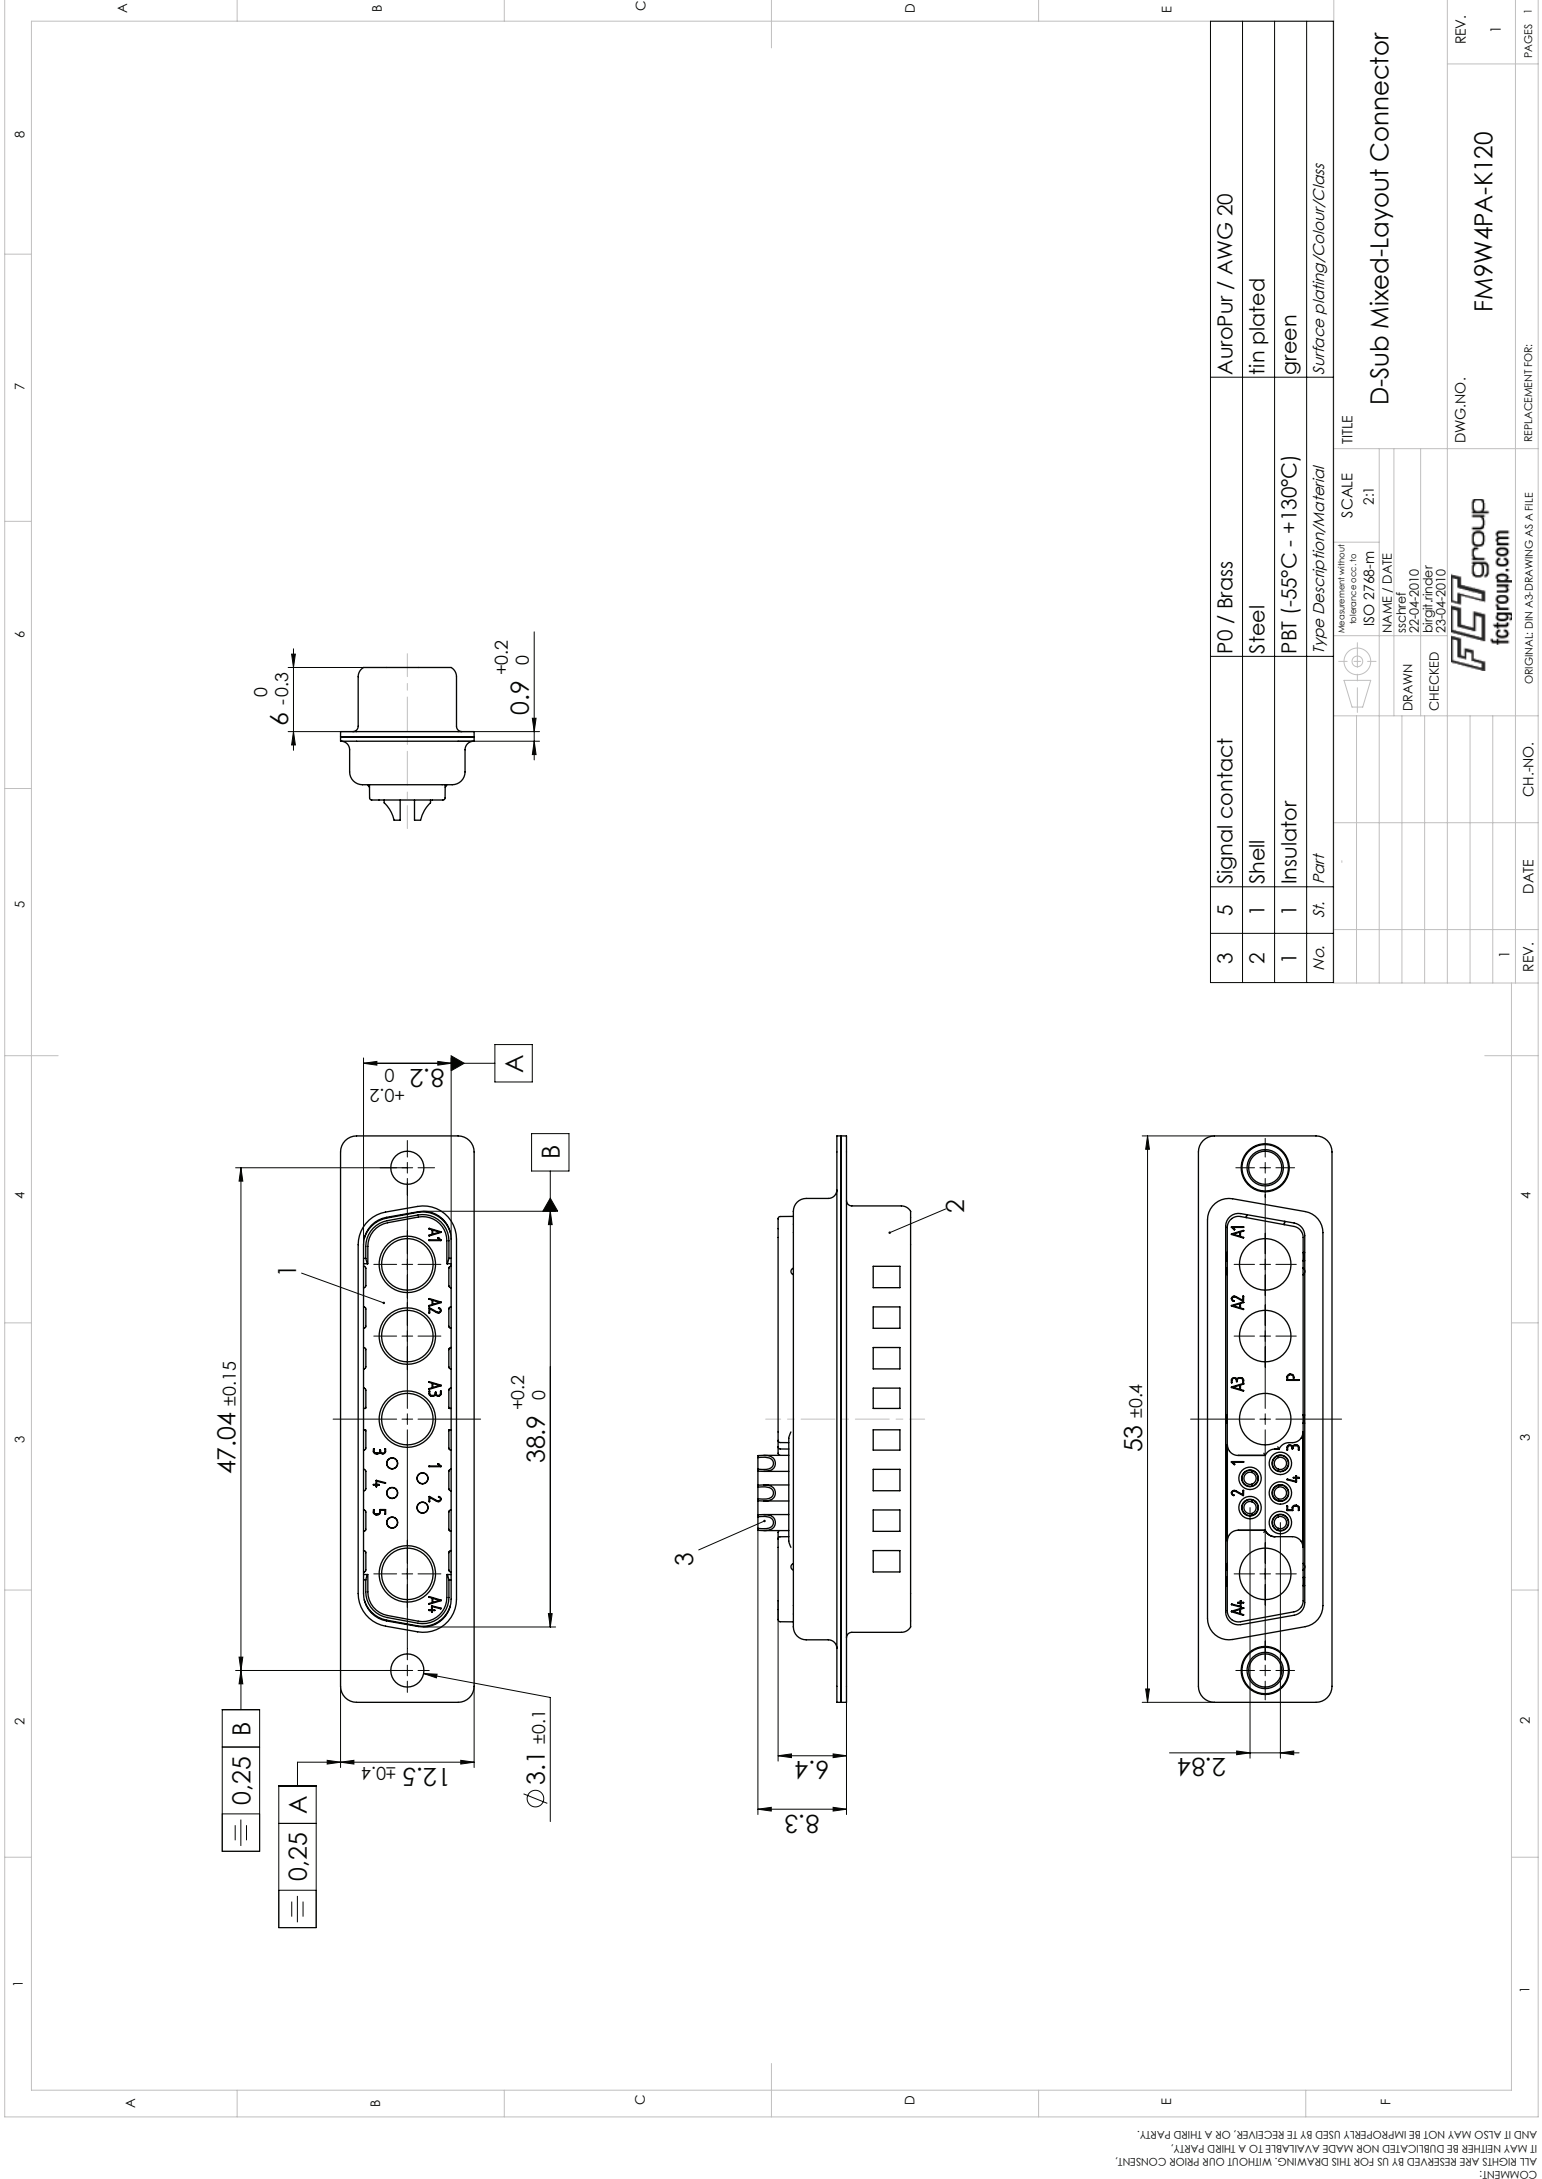

fctgroup.com