

RF AMPLIFIER

MODEL *TM7282*

Available as: TM7282, 4 Pin TO-8 (T4)
 TN7282, 4 Pin Surface Mount (SM3)
 FP7282, 4 Pin Flatpack (FP4)
 BX7282, Connectorized Housing (H1)

Features

- High Output Power: +21 dBm Typical
- High Gain: 23.5 dB Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	20 - 250 MHz	20 - 250 MHz
Gain (dB)	23.5	21.0 Min.
Power @ 1 dB Comp. (dBm)	+21	+18.0 Min.
Reverse Isolation (dB)	- 28	- 27 Max.
VSWR In	<1.5:1	2.0:1 Max.
VSWR Out	<1.5:1	2.3:1 Max.
Noise figure (dB)	4.0	5.0 Max.
Power Vdc	+15	+15
mA	45	50 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point +43 (Typ.)
 Second Order Two Tone Intercept Point +38 (Typ.)
 Third Order Two Tone Intercept Point +34 (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts
 (1 Minute Max.)
 Maximum Peak Power 0.5 Watt
 (3 µsec Max.)

Typical Performance Data

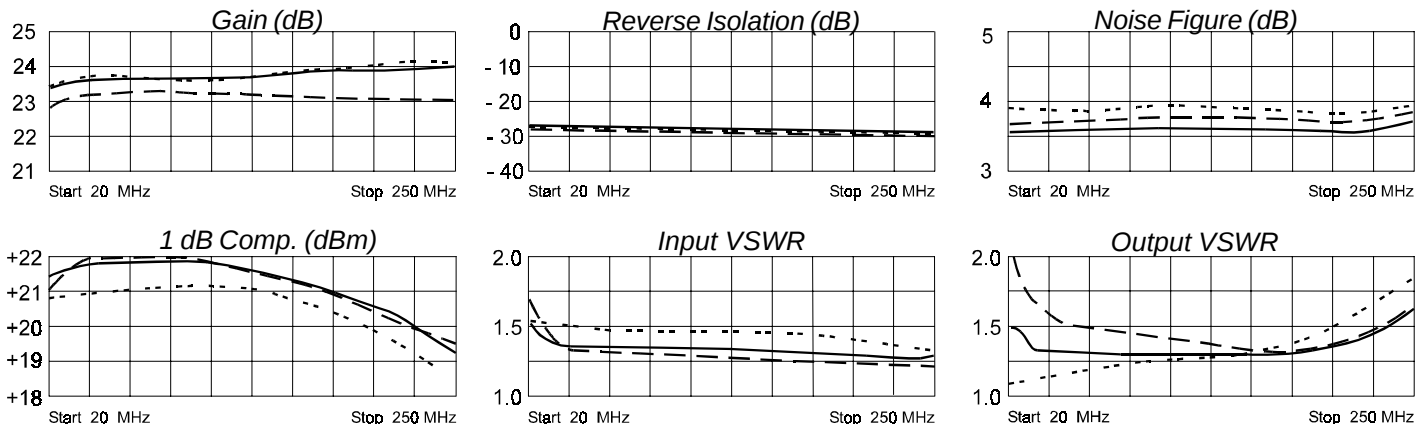

Legend ——— + 25 °C - - - + 85 °C -55 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
10	.34	- 94	14.03	-148	.03	19	.34	112
20	.22	-128	14.93	-171	.03	6	.19	99
50	.16	-168	15.15	164	.03	- 5	.13	76
100	.15	157	15.21	136	.03	-13	.13	38
150	.13	127	15.31	111	.03	-23	.13	- 9
200	.12	91	15.46	84	.03	-38	.15	- 69
250	.10	40	15.34	56	.03	-51	.24	-129
300	.12	- 34	14.77	25	.02	-69	.41	-173

Amplifonix

2707 Black Lake Place, Philadelphia, PA 19154

TEL 215-464-4000 • • • • FAX 215-464-4001 3/18/03