
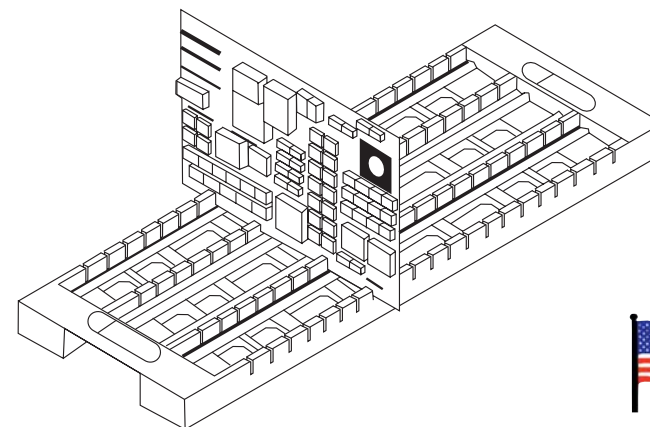



- A. This Vermason PCB rack is moulded from a carbon black-filled polypropylene compound.
- B. These racks are designed to protect CMOS loaded boards in storage.
- C. Recommended maximum operating temperature is 85°C.
- D. Open carrying handles.
- E. Measurements: 175mm x 500mm.
- F. Weight: 0.7kg.
- G. 20 slots with easy-to-load angle: 3mm x 8mm on a 18.75mm pitch.
- H. Recyclable

"Tools intended for use within the EPA [ESD protected area] shall, as far as is practicable, be so constructed that they do not generate or hold an electrostatic chargeAll tools and machinery, for example electrical, mechanical or pneumatic, shall be so constructed that any non-insulating part of the tool or machine which may touch an ESDS [ESD sensitive items] shall be at EPA ground potential." [EN 61340-5-1 clause 5.2.10 Tools, machinery, dispensers and test equipment]

Properties		UNIT	TEST METHOD
Electrical Properties			
Surface Resistance	<10E6	Ohms/square	ASTM D-257
Volume Resistance	<10E6	Ohms-cm	ASTM D-257
Mechanical Properties			
Tensile Strength @ Break	2860 (19.7)	psi (MPa)	ASTM D-638
Tensile Elongation @ Break	2.5	%	ASTM D-638

ITEM	DESCRIPTION
237215	Conductive PCB Rack, 175mm x 500mm

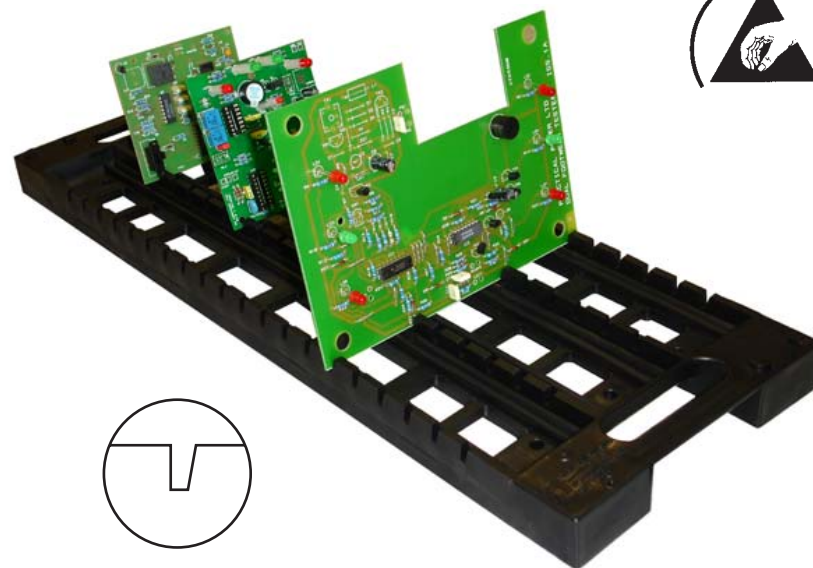

Made in America

Vermason

Conductive PCB Rack, 175mm x 500mm

VERMASON
UNIT C, 4TH DIMENSION, FOURTH AVENUE, LETCHWORTH, HERTS, SG6 2TD UK
PHONE: +44 (0) 1462-672005, FAX: +44 (0) 1462-670440
E-MAIL: Service@Vermason.co.uk, INTERNET: Vermason.co.uk

Drawing Number
237215

DATE:
February 2009