

4 BIT DIGITAL ATTENUATOR

TAD5006

Available in:
DP-5, 24 Pin DIP Package
and Connectorized Housings

- 10 - 150 MHz
- 30dB Attenuation Range
- Integral TTL Driver
- Operating Temp. -55°C to + 85°C
- Screening to the tables of MIL-STD-883 available

Specifications


CHARACTERISTIC	TYPICAL Ta = 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	10 - 150 MHz	10 - 150 MHz
Insertion Loss (dB)	2.5	3.3 Max.
Attenuation Range (dB)	2 - 30	2 - 30
Steps (dB)	2,4,8,16	2,4,8,16
Accuracy	±0.2 dB ±0.5%	±0.3 dB Max. ±1%
VSWR	1.4:1	1.65:1 Max.
Switching Speed (μsec)	3	10 Max.
Switching Transients (V)	0.5	1.0 Max.
DC Bias	VDC mA	
	+5 22	+5 30 Max.

Note: Care should always be taken to effectively ground case of each unit

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
Storage Temperature -65°C to + 125 °C
Case Temperature + 125 °C
DC Voltage +6 Volts
Continuous RF Input Power +30 dBm


Pin Layout

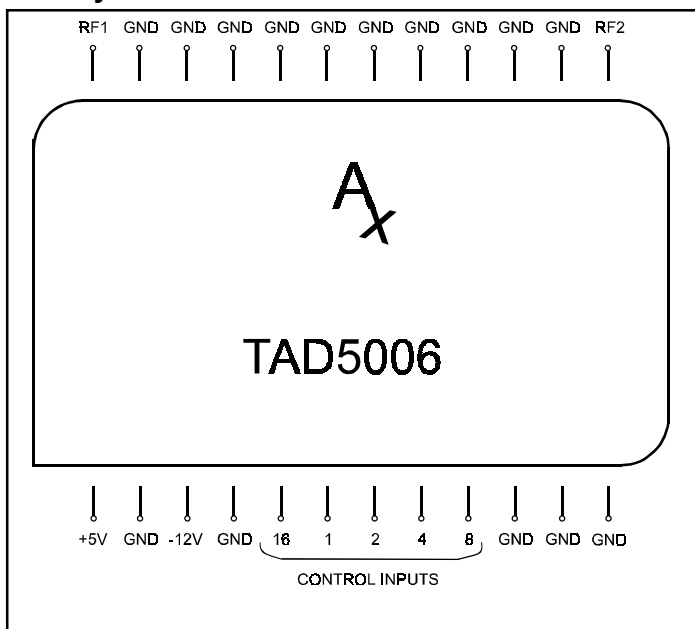

Truth Table

Control Input 4 Line TTL	Attenuator Setting
1	Attenuate
0	Thru

Typical Performance Data

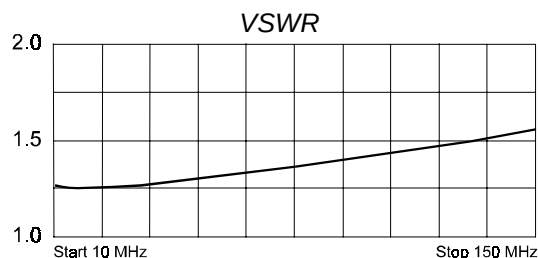

Amplifonix

2707 Black Lake Place, Philadelphia, PA 19154

TEL 215-464-4000 • • • • FAX 215-464-4001