



# Precision Low TCR High Temperature Thin Film Resistor, Surface Mount Chip, $\pm 5$ ppm/ $^{\circ}$ C TCR, 0.02 % Tolerance

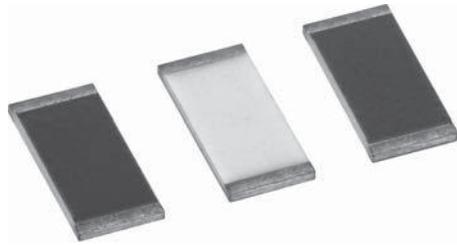

Vishay's proven precision thin film wraparound resistors will meet your exact requirements. These resistors are ideal for use in oil industry precision applications requiring low noise, long term stability under high temperature, ultra low temperature coefficient of resistance, and low voltage coefficient. The chip resistors are available in any resistance ohmic value in the range specified below.

## CONSTRUCTION

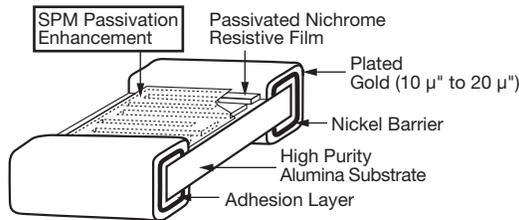

## FEATURES

- PLTT0603 case size is qualified to AEC-Q200 for automotive applications
- -55  $^{\circ}$ C to 215  $^{\circ}$ C operating temperature range
- TCR of  $\pm 5$  ppm/ $^{\circ}$ C standard
- Tolerances to  $\pm 0.02$  %
- Anti corrosion resistant film with (SPM) special passivation method
- Stable film and performance characteristics
- 0.5 % max. at 2000 h, 215  $^{\circ}$ C, 25 % rated power
- Non-standard resistance values available
- Very low noise and voltage coefficient (< -30 dB, 0.1 ppm/V)
- UL 94 V-0 flame resistant
- Gold terminations (10  $\mu$ " to 20  $\mu$ " )
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



## TYPICAL PERFORMANCE

	ABSOLUTE
TCR	5
TOL.	0.02

## STANDARD ELECTRICAL SPECIFICATIONS


TEST	SPECIFICATIONS	CONDITIONS
Material	Passivated nichrome	-
Resistance Range	75 $\Omega$ to 3 M $\Omega$	-
TCR: Absolute	$\pm 5$ ppm/ $^{\circ}$ C	-55 $^{\circ}$ C to +125 $^{\circ}$ C
Tolerance: Absolute	$\pm 0.1$ % to $\pm 0.02$ %	+25 $^{\circ}$ C
Stability: Absolute	$\Delta R \pm 0.5$ %	2000 h at 215 $^{\circ}$ C, 25 % rated power
Stability: Ratio	-	-
Voltage Coefficient	$\pm 0.1$ ppm/V (typical)	-
Working Voltage	100 V to 200 V	-
Operating Temperature Range	-55 $^{\circ}$ C to +215 $^{\circ}$ C	-
Storage Temperature Range	-55 $^{\circ}$ C to +215 $^{\circ}$ C	-
Noise	< -35 dB (typical)	-
Shelf Life Stability: Absolute	$\Delta R \pm 0.01$ %	1 year at +25 $^{\circ}$ C

## COMPONENT RATINGS

CASE SIZE	POWER RATING AT 70 $^{\circ}$ C (mW)	WORKING VOLTAGE (V)	RESISTANCE RANGE ( $\Omega$ )
0603	150	75	75 to 130K
0805	250	100	250 to 260K
1206	400	200	500 to 775K
2010	800	200	500 to 2M
2512	1000	200	500 to 3M

### Note

- Consult factory for additional case size

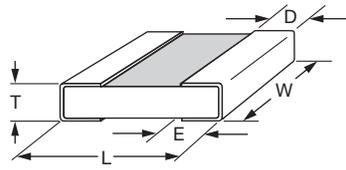**DIMENSIONS** in inches


CASE SIZE	TERM	L	W	T	D	E
0603	G	0.064 ± 0.006	0.032 ± 0.005	0.015 to 0.033	0.012 ± 0.005	0.015 ± 0.005
0805	G	0.080 ± 0.006	0.050 ± 0.005	0.015 to 0.033	0.016 ± 0.008	0.015 ± 0.005
1206	G	0.126 ± 0.008	0.063 ± 0.005	0.015 to 0.033	0.020 + 0.005/- 0.010	0.020 + 0.005/- 0.010
2010	G	0.209 ± 0.009	0.098 ± 0.005	0.015 to 0.033	0.020 ± 0.005	0.020 ± 0.005
2512	G	0.259 ± 0.009	0.124 ± 0.005	0.015 to 0.033	0.020 ± 0.005	0.020 ± 0.005


**ENVIRONMENTAL TESTS - MIL-PRF-55342**

ENVIRONMENTAL TEST	CONDITIONS	TYPICAL VISHAY PERFORMANCE
Thermal Shock	MIL-STD-202 method 107 Cond F, -65 °C to +150 °C	± 0.02 %
Short Time Overload	MIL-PRF-55342 Para 4.8.6, 2.5x rated working voltage	± 0.01 %
Low Temperature Operation	MIL-PRF-55342 Para 4.8.5, -65 °C	± 0.01 %
Resistance to Soldering Heat	MIL-STD-202 method 210	± 0.01 %
Moisture Resistance	MIL-STD-202 method 106, no power applied	± 0.02 %
High Temperature Exposure	MIL-PRF-55342 Para 4.8.7, at 150 °C for 100 h	± 0.02 %
Life	MIL-STD-202 method 108, 25 % rated power for 2000 h at 215 °C	± 0.50 %
TCR	MIL-STD-202 method 304	± 5 ppm/°C


**ENVIRONMENTAL TESTS - AEC-Q200 PLTT0603 Case Size Only**

ENVIRONMENTAL TEST	CONDITIONS	TYPICAL VISHAY PERFORMANCE
High temperature storage	MIL-STD-202 method 108, 1000 h at 125 °C	± 0.10 %
Temperature cycling	JESD22 method JA-104, 1000 cycles, -55 °C to +155 °C	± 0.25 %
Moisture resistance	MIL-STD-202 method 106, no power applied	± 0.10 %
Biased humidity	MIL-STD-202 method 103, 1000 h at 85 °C, 85 % RH, 10 % rated power	± 0.20 %
Life	MIL-STD-202 method 108, 1000 h at 175 °C, 50 % rated power	± 0.50 %
Mechanical shock	MIL-STD-202 method 213, condition C	± 0.02 %
Vibration	MIL-STD-202 method 204, 10 Hz to 2 kHz	± 0.02 %
Resistance to soldering heat	MIL-STD-202 method 210, condition B	± 0.02 %
Electrostatic discharge	AEC-Q200-002, human body (< 1 kΩ: 1 kV; > 1 kΩ: 2 kV)	< 1 kΩ: 1 kV; > 1 kΩ: 2 kV
Solderability	MIL-STD-883 method 2003 para 2.3.1 and J-STD-002	Pass
TCR	MIL-STD-202 method 304	± 5 ppm /°C
Die shear	MIL-PRF-55342, 0.5 kg for 30 s minimum	Pass
Flame retardance	AEC-Q200-001 para 4.0	Pass


**DERATING CURVE**

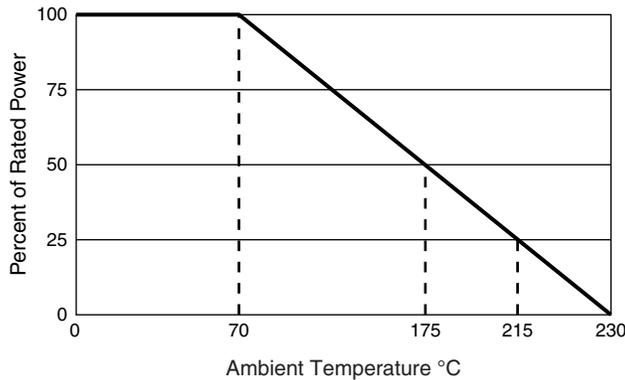

**PLTT0805 500 Ω STABILITY TEST RESULTS**

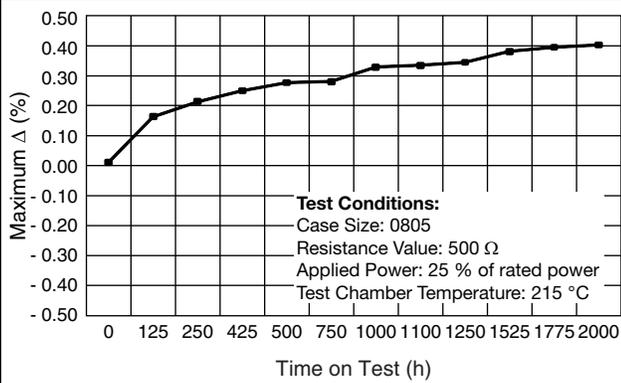

**PLTT0805 50 kΩ STABILITY TEST RESULTS**

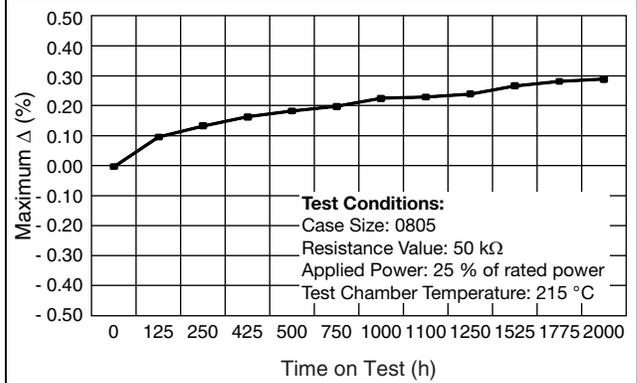

**Note**

- Performance obtained with following mounting conditions  
 PCB: Polyimide IPC-7831A STD land patterns  
 Solder paste: PbSnAg (93.5/5/1.5)

**GLOBAL PART NUMBER INFORMATION**

<b>P</b>	<b>L</b>	<b>T</b>	<b>T</b>	<b>0</b>	<b>8</b>	<b>0</b>	<b>5</b>	<b>Z</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>Q</b>	<b>G</b>	<b>T</b>	<b>1</b>
<b>GLOBAL MODEL</b>	<b>CASE SIZE</b>	<b>TCR CHARACTERISTIC</b>		<b>RESISTANCE</b>				<b>TOLERANCE</b>	<b>TERMINATION</b>			<b>PACKAGING</b>				
PLTT	0603 0805 1206 2010 2512	Z = ± 5 ppm/°C		The first 3 digits are significant figures and the last digit specifies the number of zeros to follow. "R" designates the decimal point.  Example: 1001 = 1 kΩ 2500 = 250 Ω  Special values with more than 4 significant figures, use a R for value below 1 kΩ and a K for values greater than 1 kΩ to signify a decimal point.  982R6 = 982.6 Ω 532R41 = 532.41 Ω				Q = ± 0.02 % (1) A = ± 0.05 % B = ± 0.1 % D = ± 0.5 % F = ± 1 % G = ± 2 %	G = Wraparound Gold over Ni barrier (10 μ" min. Au)			<b>WS = WAFFLE</b> <b>WI = 100 min./1mult</b> (item single lot date code) <b>WP = 100 min./1mult</b> (package unit single lot date code)  <b>TAPE AND REEL</b> <b>T0 = 100 min., 100 mult</b> <b>T1 = 1000 min., 1000 mult</b> <b>T5 = 500 min., 500 mult</b> <b>TF = Full reel</b> <b>TS = 100 min., 1 mult</b> <b>TI = 100 min./1mult</b> (item single lot date code) <b>TP = 100 min., 1 mult</b> (package unit single lot date code)				

**Note**

- (1) Available above 100 Ω



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Vishay:

[PLTT0805Z1001QGT5](#) [PLTT0805Z1002QGT5](#) [PLTT0805Z1502QGT5](#) [PLTT0805Z2001QGT5](#)  
[PLTT0805Z2002QGT5](#) [PLTT0805Z2500QGT5](#) [PLTT0805Z2522QGT5](#) [PLTT0805Z4990QGT5](#) [PLTT0805Z4991QGT5](#)  
[PLTT0805Z5002QGT5](#) [PLTT0805Z2520QGT5](#) [PLTT0805Z2550QGT5](#) [PLTT0805Z2580QGT5](#)  
[PLTT0805Z2610QGT5](#) [PLTT0805Z2640QGT5](#) [PLTT0805Z2670QGT5](#) [PLTT0805Z2710QGT5](#) [PLTT0805Z2740QGT5](#)  
[PLTT0805Z2770QGT5](#) [PLTT0805Z2800QGT5](#) [PLTT0805Z2840QGT5](#) [PLTT0805Z2870QGT5](#)  
[PLTT0805Z2910QGT5](#) [PLTT0805Z2940QGT5](#) [PLTT0805Z2980QGT5](#) [PLTT0805Z3010QGT5](#) [PLTT0805Z3050QGT5](#)  
[PLTT0805Z3090QGT5](#) [PLTT0805Z3120QGT5](#) [PLTT0805Z3160QGT5](#) [PLTT0805Z3200QGT5](#)  
[PLTT0805Z3240QGT5](#) [PLTT0805Z3280QGT5](#) [PLTT0805Z3320QGT5](#) [PLTT0805Z3360QGT5](#) [PLTT0805Z3400QGT5](#)  
[PLTT0805Z3440QGT5](#) [PLTT0805Z3480QGT5](#) [PLTT0805Z3520QGT5](#) [PLTT0805Z3570QGT5](#)  
[PLTT0805Z3610QGT5](#) [PLTT0805Z3650QGT5](#) [PLTT0805Z3700QGT5](#) [PLTT0805Z3740QGT5](#) [PLTT0805Z3790QGT5](#)  
[PLTT0805Z3830QGT5](#) [PLTT0805Z3880QGT5](#) [PLTT0805Z3920QGT5](#) [PLTT0805Z3970QGT5](#)  
[PLTT0805Z4020QGT5](#) [PLTT0805Z4070QGT5](#) [PLTT0805Z4120QGT5](#) [PLTT0805Z4170QGT5](#) [PLTT0805Z4220QGT5](#)  
[PLTT0805Z4270QGT5](#) [PLTT0805Z4320QGT5](#) [PLTT0805Z4370QGT5](#) [PLTT0805Z4420QGT5](#)  
[PLTT0805Z4480QGT5](#) [PLTT0805Z4530QGT5](#) [PLTT0805Z4590QGT5](#) [PLTT0805Z4640QGT5](#) [PLTT0805Z4700QGT5](#)  
[PLTT0805Z4750QGT5](#) [PLTT0805Z4810QGT5](#) [PLTT0805Z4870QGT5](#) [PLTT0805Z4930QGT5](#)  
[PLTT0805Z5050QGT5](#) [PLTT0805Z5110QGT5](#) [PLTT0805Z5170QGT5](#) [PLTT0805Z5230QGT5](#) [PLTT0805Z5300QGT5](#)  
[PLTT0805Z5360QGT5](#) [PLTT0805Z5420QGT5](#) [PLTT0805Z5490QGT5](#) [PLTT0805Z5560QGT5](#)  
[PLTT0805Z5620QGT5](#) [PLTT0805Z5690QGT5](#) [PLTT0805Z5760QGT5](#) [PLTT0805Z5830QGT5](#) [PLTT0805Z5900QGT5](#)  
[PLTT0805Z5970QGT5](#) [PLTT0805Z6040QGT5](#) [PLTT0805Z6120QGT5](#) [PLTT0805Z6190QGT5](#)  
[PLTT0805Z6260QGT5](#) [PLTT0805Z6340QGT5](#) [PLTT0805Z6420QGT5](#) [PLTT0805Z6490QGT5](#) [PLTT0805Z6570QGT5](#)  
[PLTT0805Z6650QGT5](#) [PLTT0805Z6730QGT5](#) [PLTT0805Z6810QGT5](#) [PLTT0805Z6900QGT5](#)  
[PLTT0805Z6980QGT5](#) [PLTT0805Z7060QGT5](#) [PLTT0805Z7150QGT5](#) [PLTT0805Z7230QGT5](#) [PLTT0805Z7320QGT5](#)  
[PLTT0805Z7410QGT5](#)