

NUMBER C-172795



三角度 (3-d ANGLE PROJECTION)

METRIC


ALL DIMENSIONS IN MM. DO NOT SCALE PRINT

PRINT DIST



REV. 10/82

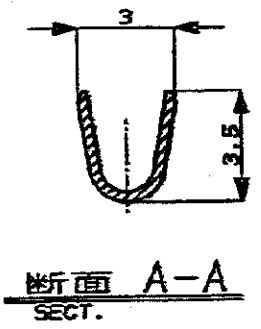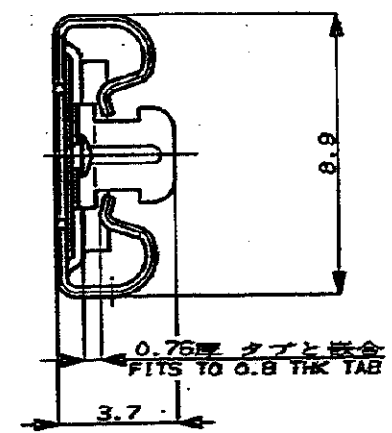

断面 A-A
SECT.



断面 B-B
SECT.

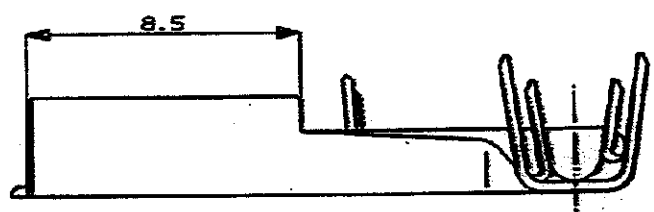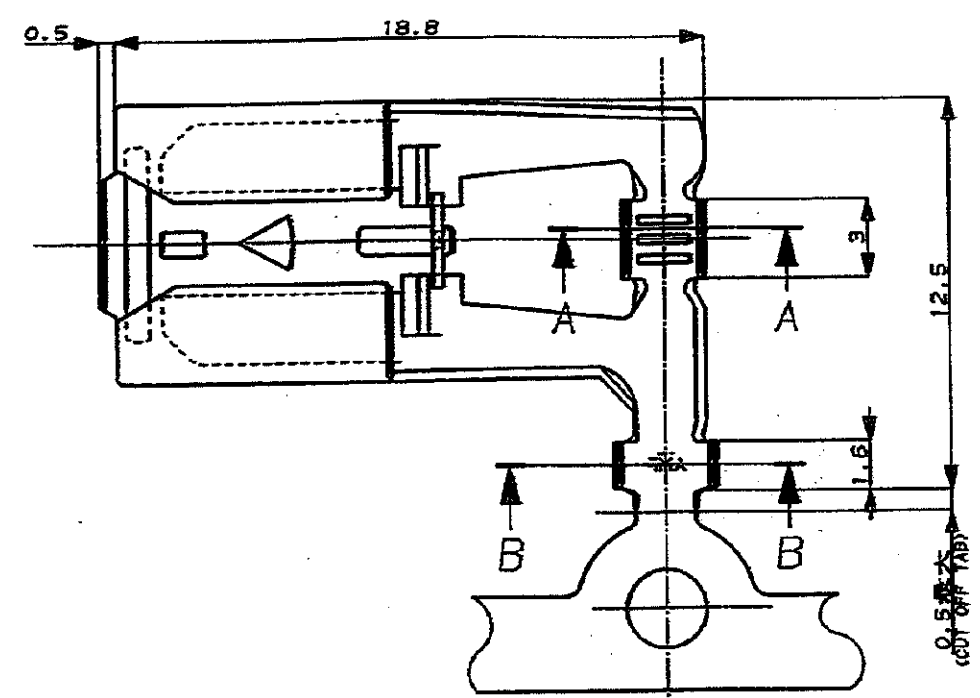

-1; 本図

注;

- 1 適用ハウジング型番; 172615
- 2 適用製品規格 NO.108-5131
- 3 適用圧着規格 NO.114-5079

NOTES;

- 1 THE MATING PLUG HSG P/N 172615
- 2 PRODUCT SPEC NO.108-5131
- 3 APPLICATION SPEC NO.114-5079

Copyright ©1982 AMP (Japan), LTD. ALL RIGHTS RESERVED.		Copyright ©1982 AMP (Japan), LTD. ALL RIGHTS RESERVED.		AMP 東京エレクトロニクス株式会社 Tokyo, Japan	
適合電線径 (WIRE RANGE) AW 0.5-2mm ² (AWG20-14)		適合挿入径 (INSULATION DIA.) 2.2-3.4 mm		名称 (NAME) "312"シリーズ ポジティブ ロック リセプタクル (旗型 L)	
材料 (MATERIAL) 黄銅 (BRASS) 0.03 鍍金 (GOLD PLATE) 0.03		仕上 (FINISH)		公差 (TOLERANCE) H7/g6 H8/d9 H9/f9 H10/k9 H11/h9 H12/h9 H13/h9 H14/h9 H15/h9 H16/h9 H17/h9 H18/h9 H19/h9 H20/h9 H21/h9 H22/h9 H23/h9 H24/h9 H25/h9 H26/h9 H27/h9 H28/h9 H29/h9 H30/h9 H31/h9 H32/h9 H33/h9 H34/h9 H35/h9 H36/h9 H37/h9 H38/h9 H39/h9 H40/h9 H41/h9 H42/h9 H43/h9 H44/h9 H45/h9 H46/h9 H47/h9 H48/h9 H49/h9 H50/h9 H51/h9 H52/h9 H53/h9 H54/h9 H55/h9 H56/h9 H57/h9 H58/h9 H59/h9 H60/h9 H61/h9 H62/h9 H63/h9 H64/h9 H65/h9 H66/h9 H67/h9 H68/h9 H69/h9 H70/h9 H71/h9 H72/h9 H73/h9 H74/h9 H75/h9 H76/h9 H77/h9 H78/h9 H79/h9 H80/h9 H81/h9 H82/h9 H83/h9 H84/h9 H85/h9 H86/h9 H87/h9 H88/h9 H89/h9 H90/h9 H91/h9 H92/h9 H93/h9 H94/h9 H95/h9 H96/h9 H97/h9 H98/h9 H99/h9 H100/h9	
A 製作 J-1349		DR. K. YAMADA		REV. K. YAMADA	
LTR 変更 (REVISION RECORD)		DR. CHK. DATE		APP. A. YAMADA	
				SCALE 5-1	
				REV. A	
				SHEET 1 OF 1	

(CUSTOMER DRAWING) 参考図面