

# HD74LV244A

## Octal Buffers / Drivers with 3-state Outputs

REJ03D0328-0300Z  
(Previous ADE-205-246A (Z))  
Rev.3.00  
Jun. 24, 2004

### Description

The HD74LV244A has eight line drivers with three-state outputs in a 20-pin package. Four non-inverters are included in one circuit. Each circuit can be independently controlled by the enable signal  $\overline{1OE}$  or  $\overline{2OE}$ , which enables outputs when receiving a low-level signal. Low-voltage operation is suitable for battery-powered products (e.g., notebook computers), and the low-power consumption extends the battery life.

### Features

- $V_{CC} = 2.0\text{ V}$  to  $5.5\text{ V}$  operation
- All inputs  $V_{IH}(\text{Max.}) = 5.5\text{ V}$  ( $@V_{CC} = 0\text{ V}$  to  $5.5\text{ V}$ )
- All outputs  $V_O(\text{Max.}) = 5.5\text{ V}$  ( $@V_{CC} = 0\text{ V}$ )
- Typical  $V_{OL}$  ground bounce  $< 0.8\text{ V}$  ( $@V_{CC} = 3.3\text{ V}$ ,  $T_a = 25^\circ\text{C}$ )
- Typical  $V_{OH}$  undershoot  $> 2.3\text{ V}$  ( $@V_{CC} = 3.3\text{ V}$ ,  $T_a = 25^\circ\text{C}$ )
- Output current  $\pm 8\text{ mA}$  ( $@V_{CC} = 3.0\text{ V}$  to  $3.6\text{ V}$ ),  $\pm 16\text{ mA}$  ( $@V_{CC} = 4.5\text{ V}$  to  $5.5\text{ V}$ )
- Ordering Information

| Part Name      | Package Type       | Package Code | Package Abbreviation | Taping Abbreviation (Quantity) |
|----------------|--------------------|--------------|----------------------|--------------------------------|
| HD74LV244AFPEL | SOP-20 pin (JEITA) | FP-20DAV     | FP                   | EL (2,000 pcs/reel)            |
| HD74LV244ARPEL | SOP-20 pin (JEDEC) | FP-20DBV     | RP                   | EL (1,000 pcs/reel)            |
| HD74LV244ATELL | TSSOP-20 pin       | TTP-20DAV    | T                    | ELL (2,000 pcs/reel)           |


Note: Please consult the sales office for the above package availability.

### Function Table

| Inputs          |   | Output Y |
|-----------------|---|----------|
| $\overline{OE}$ | A |          |
| L               | H | H        |
| L               | L | L        |
| H               | X | Z        |

Note: H: High level  
L: Low level  
X: Immaterial  
Z: High impedance

## Pin Arrangement

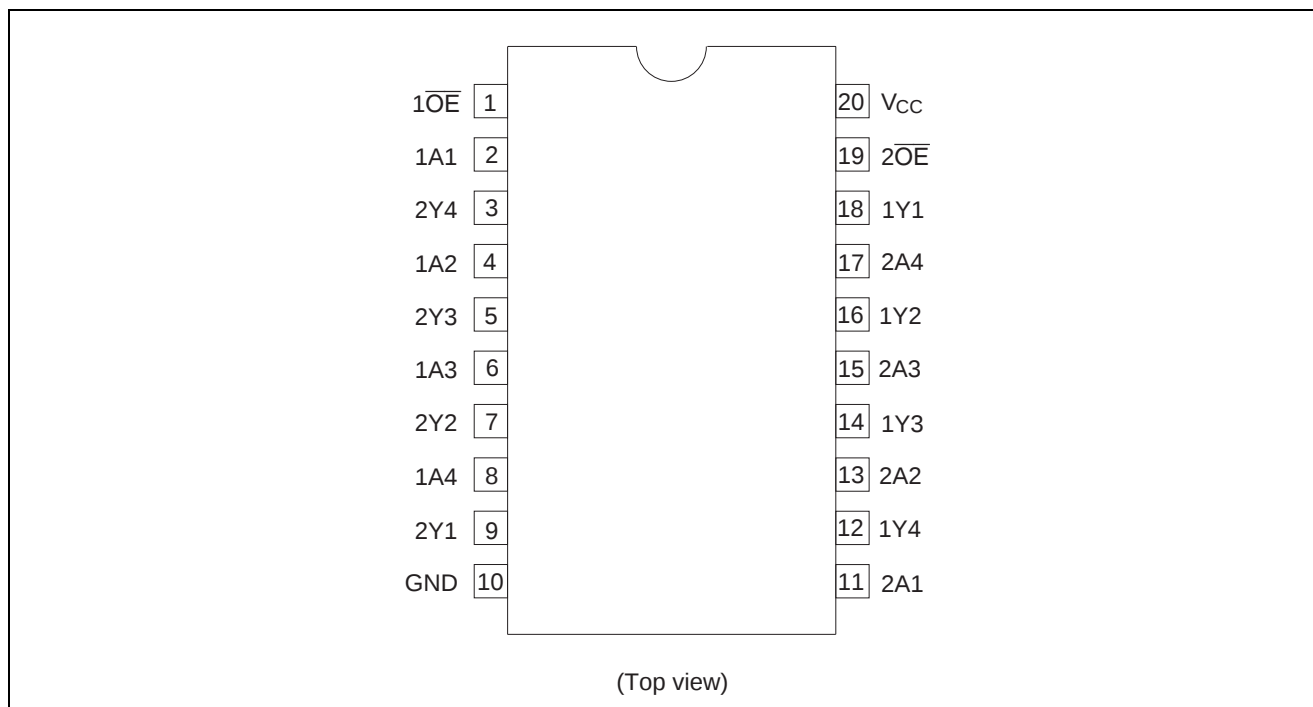

## Absolute Maximum Ratings

| Item                                                                               | Symbol                | Ratings                               | Unit             | Conditions                                    |
|------------------------------------------------------------------------------------|-----------------------|---------------------------------------|------------------|-----------------------------------------------|
| Supply voltage range                                                               | $V_{CC}$              | -0.5 to 7.0                           | V                |                                               |
| Input voltage range <sup>*1</sup>                                                  | $V_I$                 | -0.5 to 7.0                           | V                |                                               |
| Output voltage range <sup>*1, *2</sup>                                             | $V_O$                 | -0.5 to $V_{CC} + 0.5$<br>-0.5 to 7.0 | V                | Output: H or L<br>$V_{CC}$ : OFF or Output: Z |
| Input clamp current                                                                | $I_{IK}$              | -20                                   | mA               | $V_I < 0$                                     |
| Output clamp current                                                               | $I_{OK}$              | $\pm 50$                              | mA               | $V_O < 0$ or $V_O > V_{CC}$                   |
| Continuous output current                                                          | $I_O$                 | $\pm 35$                              | mA               | $V_O = 0$ to $V_{CC}$                         |
| Continuous current through $V_{CC}$ or GND                                         | $I_{CC}$ or $I_{GND}$ | $\pm 70$                              | mA               |                                               |
| Maximum power dissipation at $T_a = 25^\circ\text{C}$ (in still air) <sup>*3</sup> | $P_T$                 | 835<br>757                            | mW               | SOP<br>TSSOP                                  |
| Storage temperature                                                                | $T_{stg}$             | -65 to 150                            | $^\circ\text{C}$ |                                               |

Notes: The absolute maximum ratings are values, which must not be individually be exceeded, and furthermore, no two of which may be realized at the same time.


1. The input and output voltage ratings may be exceeded even if the input and output clamp-current ratings are observed.
2. This value is limited to 5.5 V maximum.
3. The data above are measured by  $\Delta V_{BE}$  method mounting on glass epoxy board (40 × 40 × 1.6 mm) with 10% of wiring density.

# Recommended Operating Conditions

| Item                               | Symbol                | Min | Max      | Unit        | Conditions                       |
|------------------------------------|-----------------------|-----|----------|-------------|----------------------------------|
| Supply voltage range               | $V_{CC}$              | 2.0 | 5.5      | V           |                                  |
| Input voltage range                | $V_I$                 | 0   | 5.5      | V           |                                  |
| Output voltage range               | $V_O$                 | 0   | $V_{CC}$ | V           | H or L                           |
|                                    |                       | 0   | 5.5      |             | High impedance state             |
| Output current                     | $I_{OH}$              | —   | −50      | $\mu A$     | $V_{CC} = 2.0 V$                 |
|                                    |                       | —   | −2       | mA          | $V_{CC} = 2.3 \text{ to } 2.7 V$ |
|                                    |                       | —   | −8       |             | $V_{CC} = 3.0 \text{ to } 3.6 V$ |
|                                    |                       | —   | −16      |             | $V_{CC} = 4.5 \text{ to } 5.5 V$ |
|                                    | $I_{OL}$              | —   | 50       | $\mu A$     | $V_{CC} = 2.0 V$                 |
|                                    |                       | —   | 2        | mA          | $V_{CC} = 2.3 \text{ to } 2.7 V$ |
|                                    |                       | —   | 8        |             | $V_{CC} = 3.0 \text{ to } 3.6 V$ |
|                                    |                       | —   | 16       |             | $V_{CC} = 4.5 \text{ to } 5.5 V$ |
| Input transition rise or fall rate | $\Delta t / \Delta v$ | 0   | 200      | ns/V        | $V_{CC} = 2.3 \text{ to } 2.7 V$ |
|                                    |                       | 0   | 100      |             | $V_{CC} = 3.0 \text{ to } 3.6 V$ |
|                                    |                       | 0   | 20       |             | $V_{CC} = 4.5 \text{ to } 5.5 V$ |
| Operating free-air temperature     | $T_a$                 | −40 | 85       | $^{\circ}C$ |                                  |

Note: Unused or floating inputs must be held high or low.

# Logic Diagram

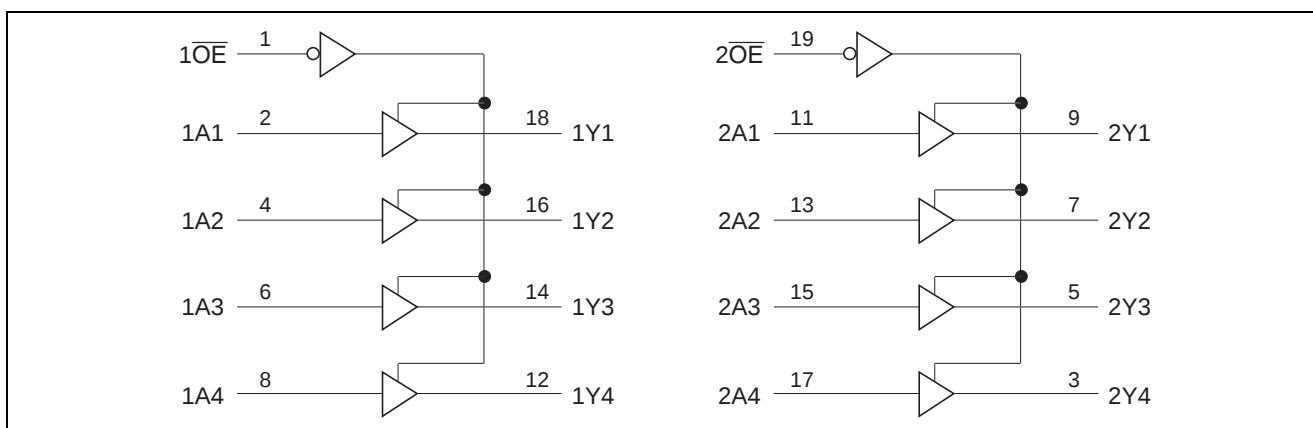

## DC Electrical Characteristics

Ta = -40 to 85°C

| Item                     | Symbol           | V <sub>CC</sub> (V) | Min                   | Typ | Max                   | Unit | Test Conditions                                              |
|--------------------------|------------------|---------------------|-----------------------|-----|-----------------------|------|--------------------------------------------------------------|
| Input voltage            | V <sub>IH</sub>  | 2.0                 | 1.5                   | —   | —                     | V    |                                                              |
|                          |                  | 2.3 to 2.7          | V <sub>CC</sub> × 0.7 | —   | —                     |      |                                                              |
|                          |                  | 3.0 to 3.6          | V <sub>CC</sub> × 0.7 | —   | —                     |      |                                                              |
|                          |                  | 4.5 to 5.5          | V <sub>CC</sub> × 0.7 | —   | —                     |      |                                                              |
|                          | V <sub>IL</sub>  | 2.0                 | —                     | —   | 0.5                   |      |                                                              |
|                          |                  | 2.3 to 2.7          | —                     | —   | V <sub>CC</sub> × 0.3 |      |                                                              |
|                          |                  | 3.0 to 3.6          | —                     | —   | V <sub>CC</sub> × 0.3 |      |                                                              |
|                          |                  | 4.5 to 5.5          | —                     | —   | V <sub>CC</sub> × 0.3 |      |                                                              |
| Output voltage           | V <sub>OH</sub>  | Min to Max          | V <sub>CC</sub> - 0.1 | —   | —                     | V    | I <sub>OH</sub> = -50 μA                                     |
|                          |                  | 2.3                 | 2.0                   | —   | —                     |      | I <sub>OH</sub> = -2 mA                                      |
|                          |                  | 3.0                 | 2.48                  | —   | —                     |      | I <sub>OH</sub> = -8 mA                                      |
|                          |                  | 4.5                 | 3.8                   | —   | —                     |      | I <sub>OH</sub> = -16 mA                                     |
|                          | V <sub>OL</sub>  | Min to Max          | —                     | —   | 0.1                   |      | I <sub>OL</sub> = 50 μA                                      |
|                          |                  | 2.3                 | —                     | —   | 0.4                   |      | I <sub>OL</sub> = 2 mA                                       |
|                          |                  | 3.0                 | —                     | —   | 0.44                  |      | I <sub>OL</sub> = 8 mA                                       |
|                          |                  | 4.5                 | —                     | —   | 0.55                  |      | I <sub>OL</sub> = 16 mA                                      |
| Input current            | I <sub>IN</sub>  | 0 to 5.5            | —                     | —   | ±1                    | μA   | V <sub>IN</sub> = 5.5 V or GND                               |
| Off-state output current | I <sub>OZ</sub>  | 5.5                 | —                     | —   | ±5                    | μA   | V <sub>O</sub> = V <sub>CC</sub> or GND                      |
| Quiescent supply current | I <sub>CC</sub>  | 5.5                 | —                     | —   | 20                    | μA   | V <sub>IN</sub> = V <sub>CC</sub> or GND, I <sub>O</sub> = 0 |
| Output leakage current   | I <sub>OFF</sub> | 0                   | —                     | —   | 5                     | μA   | V <sub>I</sub> or V <sub>O</sub> = 0 V to 5.5 V              |
| Input capacitance        | C <sub>IN</sub>  | 3.3                 | —                     | 2.3 | —                     | pF   | V <sub>I</sub> = V <sub>CC</sub> or GND                      |

Note: For conditions shown as Min or Max, use the appropriate values under recommended operating conditions.

## Switching Characteristics

$$V_{CC} = 2.5 \pm 0.2 \text{ V}$$

| Item                   | Symbol           | Ta = 25°C |      |      | Ta = -40 to 85°C |      | Unit | Test Conditions        | FROM (Input)    | TO (Output) |
|------------------------|------------------|-----------|------|------|------------------|------|------|------------------------|-----------------|-------------|
|                        |                  | Min       | Typ  | Max  | Min              | Max  |      |                        |                 |             |
| Propagation delay time | t <sub>PLH</sub> | —         | 7.5  | 12.5 | 1.0              | 15.0 | ns   | C <sub>L</sub> = 15 pF | A               | Y           |
|                        | t <sub>PHL</sub> | —         | 9.5  | 15.3 | 1.0              | 18.0 |      | C <sub>L</sub> = 50 pF |                 |             |
| Enable time            | t <sub>ZH</sub>  | —         | 8.9  | 14.6 | 1.0              | 17.0 | ns   | C <sub>L</sub> = 15 pF | $\overline{OE}$ | Y           |
|                        | t <sub>ZL</sub>  | —         | 10.8 | 17.8 | 1.0              | 21.0 |      | C <sub>L</sub> = 50 pF |                 |             |
| Disable time           | t <sub>HZ</sub>  | —         | 9.1  | 14.1 | 1.0              | 16.0 | ns   | C <sub>L</sub> = 15 pF | $\overline{OE}$ | Y           |
|                        | t <sub>LZ</sub>  | —         | 13.4 | 19.2 | 1.0              | 21.0 |      | C <sub>L</sub> = 50 pF |                 |             |

$$V_{CC} = 3.3 \pm 0.3 \text{ V}$$

| Item                   | Symbol           | Ta = 25°C |      |      | Ta = -40 to 85°C |      | Unit | Test Conditions        | FROM (Input)    | TO (Output) |
|------------------------|------------------|-----------|------|------|------------------|------|------|------------------------|-----------------|-------------|
|                        |                  | Min       | Typ  | Max  | Min              | Max  |      |                        |                 |             |
| Propagation delay time | t <sub>PLH</sub> | —         | 5.4  | 8.4  | 1.0              | 10.0 | ns   | C <sub>L</sub> = 15 pF | A               | Y           |
|                        | t <sub>PHL</sub> | —         | 6.8  | 11.9 | 1.0              | 13.5 |      | C <sub>L</sub> = 50 pF |                 |             |
| Enable time            | t <sub>ZH</sub>  | —         | 6.3  | 10.6 | 1.0              | 12.5 | ns   | C <sub>L</sub> = 15 pF | $\overline{OE}$ | Y           |
|                        | t <sub>ZL</sub>  | —         | 7.8  | 14.1 | 1.0              | 16.0 |      | C <sub>L</sub> = 50 pF |                 |             |
| Disable time           | t <sub>HZ</sub>  | —         | 7.6  | 11.7 | 1.0              | 13.0 | ns   | C <sub>L</sub> = 15 pF | $\overline{OE}$ | Y           |
|                        | t <sub>LZ</sub>  | —         | 11.0 | 16.0 | 1.0              | 18.0 |      | C <sub>L</sub> = 50 pF |                 |             |

$$V_{CC} = 5.0 \pm 0.5 \text{ V}$$

| Item                   | Symbol           | Ta = 25°C |     |      | Ta = -40 to 85°C |      | Unit | Test Conditions        | FROM (Input)    | TO (Output) |
|------------------------|------------------|-----------|-----|------|------------------|------|------|------------------------|-----------------|-------------|
|                        |                  | Min       | Typ | Max  | Min              | Max  |      |                        |                 |             |
| Propagation delay time | t <sub>PLH</sub> | —         | 3.9 | 5.5  | 1.0              | 6.5  | ns   | C <sub>L</sub> = 15 pF | A               | Y           |
|                        | t <sub>PHL</sub> | —         | 4.9 | 7.5  | 1.0              | 8.5  |      | C <sub>L</sub> = 50 pF |                 |             |
| Enable time            | t <sub>ZH</sub>  | —         | 4.5 | 7.3  | 1.0              | 8.5  | ns   | C <sub>L</sub> = 15 pF | $\overline{OE}$ | Y           |
|                        | t <sub>ZL</sub>  | —         | 5.6 | 9.3  | 1.0              | 10.5 |      | C <sub>L</sub> = 50 pF |                 |             |
| Disable time           | t <sub>HZ</sub>  | —         | 6.5 | 12.2 | 1.0              | 13.5 | ns   | C <sub>L</sub> = 15 pF | $\overline{OE}$ | Y           |
|                        | t <sub>LZ</sub>  | —         | 8.8 | 14.2 | 1.0              | 15.5 |      | C <sub>L</sub> = 50 pF |                 |             |

## Output-skew characteristics

$$C_L = 50 \text{ pF}$$

| Item        | Symbol              | V <sub>CC</sub> (V) | Ta = 25°C |     | Ta = -40 to 85°C |     | Unit |
|-------------|---------------------|---------------------|-----------|-----|------------------|-----|------|
|             |                     |                     | Min       | Max | Min              | Max |      |
| Output skew | t <sub>sk (O)</sub> | 2.3 to 2.7          | —         | 2.0 | —                | 2.0 | ns   |
|             |                     | 3.0 to 3.6          | —         | 1.5 | —                | 1.5 |      |
|             |                     | 4.5 to 5.5          | —         | 1.0 | —                | 1.0 |      |

Note: Skew between any outputs of the same package switching in the same direction. This parameter is warranted but not production tested.

# Operating Characteristics

$C_L = 50 \text{ pF}$


| Item                          | Symbol   | $V_{CC} \text{ (V)}$ | $T_a = 25^\circ\text{C}$ |      |     | Unit | Test Conditions      |
|-------------------------------|----------|----------------------|--------------------------|------|-----|------|----------------------|
|                               |          |                      | Min                      | Typ  | Max |      |                      |
| Power dissipation capacitance | $C_{PD}$ | 3.3                  | —                        | 14.0 | —   | pF   | $f = 10 \text{ MHz}$ |
|                               |          | 5.0                  | —                        | 16.0 | —   |      |                      |

# Noise Characteristics


$C_L = 50 \text{ pF}$

| Item                                   | Symbol      | $V_{CC} \text{ (V)}$ | $T_a = 25^\circ\text{C}$ |      |      | Unit | Test Conditions |
|----------------------------------------|-------------|----------------------|--------------------------|------|------|------|-----------------|
|                                        |             |                      | Min                      | Typ  | Max  |      |                 |
| Quiet output, maximum dynamic $V_{OL}$ | $V_{OL(P)}$ | 3.3                  | —                        | 0.6  | 0.8  | V    |                 |
| Quiet output, minimum dynamic $V_{OL}$ | $V_{OL(V)}$ | 3.3                  | —                        | −0.5 | −0.8 | V    |                 |
| Quiet output, minimum dynamic $V_{OH}$ | $V_{OH(V)}$ | 3.3                  | —                        | 2.9  | —    | V    |                 |
| High-level dynamic input voltage       | $V_{IH(D)}$ | 3.3                  | 2.31                     | —    | —    | V    |                 |
| Low-level dynamic input voltage        | $V_{IL(D)}$ | 3.3                  | —                        | —    | 0.99 | V    |                 |


# Test Circuit

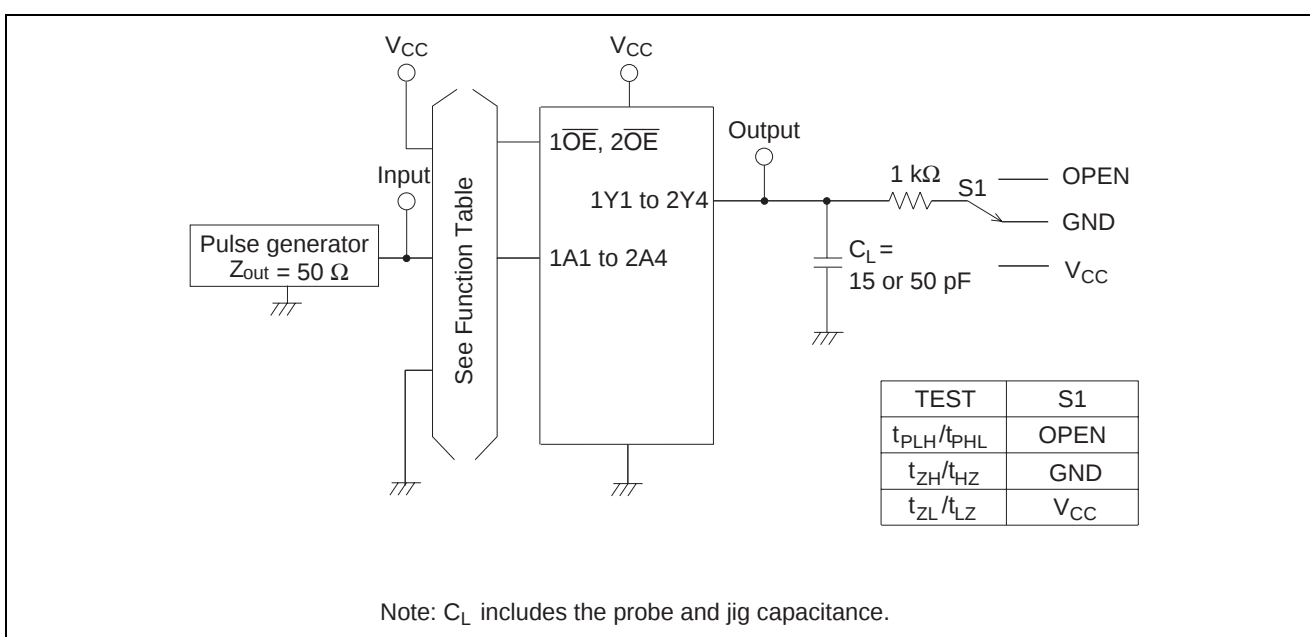

• Waveform – 1

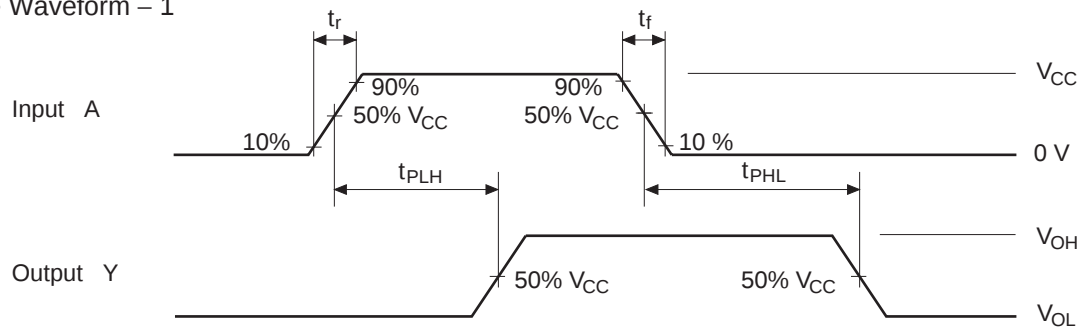

• Waveform – 2

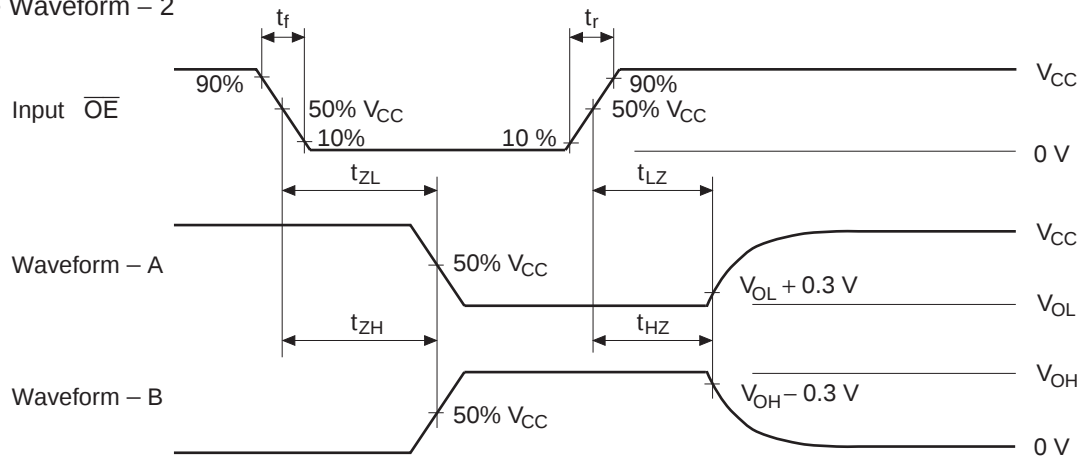


- Notes:
1. Input waveform:  $PRR \leq 1 \text{ MHz}$ ,  $Z_o = 50 \Omega$ ,  $t_r \leq 3 \text{ ns}$ ,  $t_f \leq 3 \text{ ns}$
  2. Waveform-A is for an output with internal conditions such that the output is low except when disabled by the output control.
  3. Waveform-B is for an output with internal conditions such that the output is high except when disabled by the output control.
  4. The output are measured one at a time with one transition per measurement..


# Package Dimensions

As of January, 2002

Unit: mm

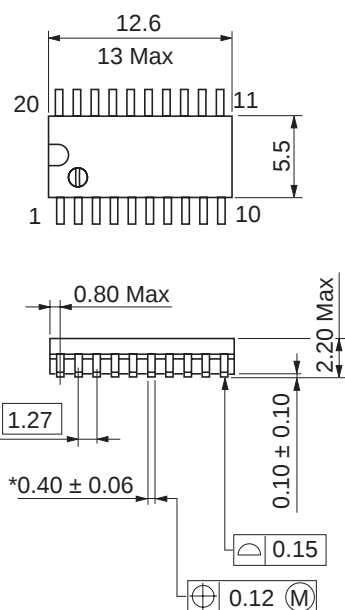


\*Pd plating




|                        |          |
|------------------------|----------|
| Package Code           | FP-20DAV |
| JEDEC                  | —        |
| JEITA                  | Conforms |
| Mass (reference value) | 0.31 g   |

As of January, 2003

Unit: mm

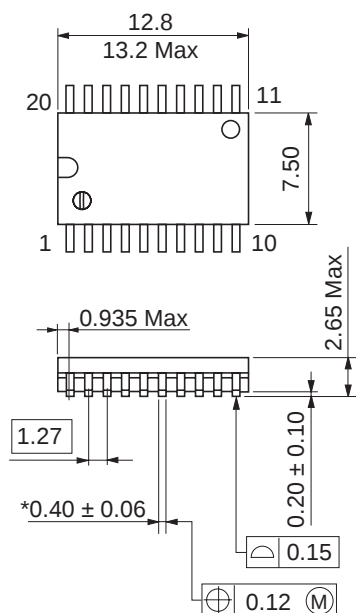



\*Ni/Pd/Au plating

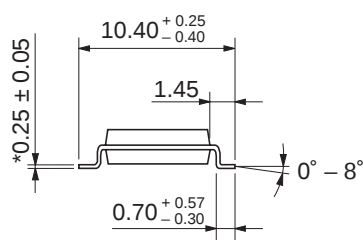

|                        |          |
|------------------------|----------|
| Package Code           | FP-20DBV |
| JEDEC                  | Conforms |
| JEITA                  | —        |
| Mass (reference value) | 0.52 g   |

As of January, 2002

Unit: mm

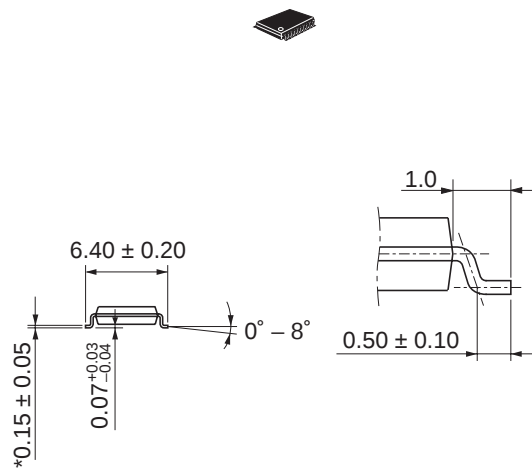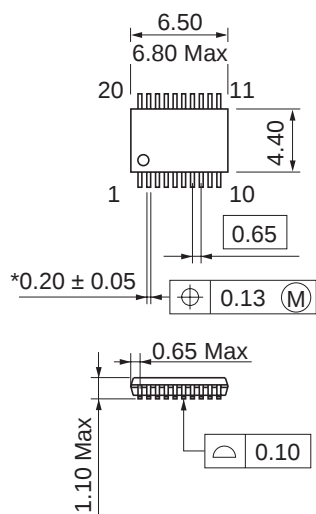

\*Pd plating

|                        |           |
|------------------------|-----------|
| Package Code           | TTP-20DAV |
| JEDEC                  | —         |
| JEITA                  | —         |
| Mass (reference value) | 0.07 g    |

## Renesas Technology Corp. Sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Keep safety first in your circuit designs!

1. Renesas Technology Corp. puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corp. product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corp. or a third party.
2. Renesas Technology Corp. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corp. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor for the latest product information before purchasing a product listed herein.  
The information described here may contain technical inaccuracies or typographical errors.  
Renesas Technology Corp. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.  
Please also pay attention to information published by Renesas Technology Corp. by various means, including the Renesas Technology Corp. Semiconductor home page (<http://www.renesas.com>).
4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corp. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
5. Renesas Technology Corp. semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
6. The prior written approval of Renesas Technology Corp. is necessary to reprint or reproduce in whole or in part these materials.
7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.  
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
8. Please contact Renesas Technology Corp. for further details on these materials or the products contained therein.



### RENESAS SALES OFFICES

<http://www.renesas.com>

#### Renesas Technology America, Inc.

450 Holger Way, San Jose, CA 95134-1368, U.S.A  
Tel: <1> (408) 382-7500 Fax: <1> (408) 382-7501

#### Renesas Technology Europe Limited.

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, United Kingdom  
Tel: <44> (1628) 585 100, Fax: <44> (1628) 585 900

#### Renesas Technology Europe GmbH

Dornacher Str. 3, D-85622 Feldkirchen, Germany  
Tel: <49> (89) 380 70 0, Fax: <49> (89) 929 30 11

#### Renesas Technology Hong Kong Ltd.

7/F., North Tower, World Finance Centre, Harbour City, Canton Road, Hong Kong  
Tel: <852> 2265-6688, Fax: <852> 2375-6836

#### Renesas Technology Taiwan Co., Ltd.

FL 10, #99, Fu-Hsing N. Rd., Taipei, Taiwan  
Tel: <886> (2) 2715-2888, Fax: <886> (2) 2713-2999

#### Renesas Technology (Shanghai) Co., Ltd.

26/F., Ruijin Building, No.205 Maoming Road (S), Shanghai 200020, China  
Tel: <86> (21) 6472-1001, Fax: <86> (21) 6415-2952

#### Renesas Technology Singapore Pte. Ltd.

1, Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632  
Tel: <65> 6213-0200, Fax: <65> 6278-8001