

SINGLE-CHIP SATELLITE SET-TOP BOX DECODER


BCM7315 FEATURES

- **All-digital satellite receivers:**
 - 1–45 Megabaud variable rate receiver
 - Integrated 7-bit A/D converters
 - Complies with DVB/DirecTV™/Digiciper II™ FEC Decoder
- **Data transport processor**
 - Support for DirecTV™ and MPEG transport streams
 - DES/DVB descrambler
 - Support for 64 PIDs and 64 section filters
 - Support for play/record from/to hard disk
- **MPEG-ATSC compliant audio/video decoders**
 - MP@ML MPEG-2 video decoder
 - Decode of MPEG Layer 1 and Layer 2 Audio
 - Support for Dolby® AC-3 and compressed PCM
- **Broadcom graphics engine (BGE)**
 - Supports 3 Graphics, 1 x video and H/W cursor planes
 - 2D video scaling support
 - Integrated PAL/NTSC/SECAM encoder
 - ITU-656 input support
- **MIPS32™ CPU core @ 175-Mhz**
 - MMU Support
 - EJTAG debug support
- **IDE host adapter**
 - ATA5 command set, Ultra ATA/66 I/F


SUMMARY OF BENEFITS

- Provides a cost-effective solution for direct broadcast satellite (DBS) applications.
- Fully integrated QPSK receiver, MPEG-2 A/V decoder, MIPS™ CPU and peripherals for complete set-top box system.
 - Low cost solution for next generation set-top boxes.
- PVR capability enables personal viewing and scheduling, video-on-demand (VOD), and VCR “trick mode” effects on any video stream.
 - Encryption ensures copy protection of recorded programming content.
 - Simultaneously support for record and playback.
- Advanced 2D graphics system allows applications such as Internet browsers and electronic program guides to deliver studio-quality text and graphics on television monitors.
- Broadcom-developed device drivers enable rapid software development cycle with support of industry-standard operating systems.
- Subsystems are based on Broadcom's field-proven production-available technologies.

BCM7315 Single-Chip System Block Diagram

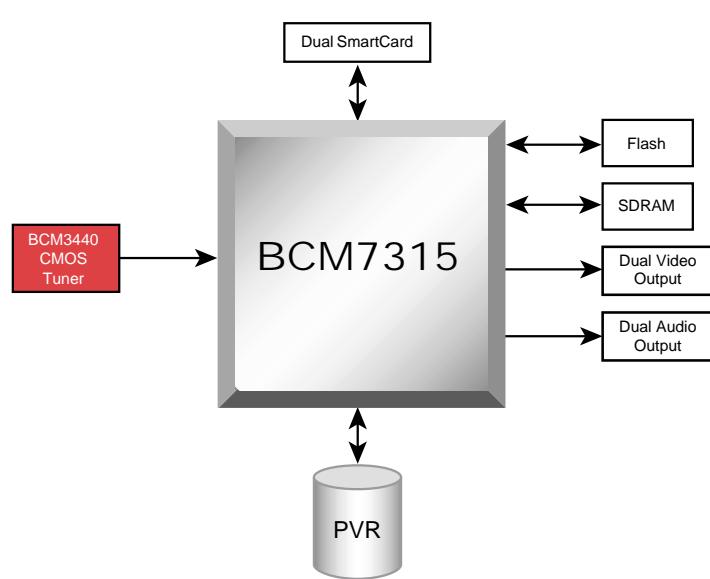

Block Diagram

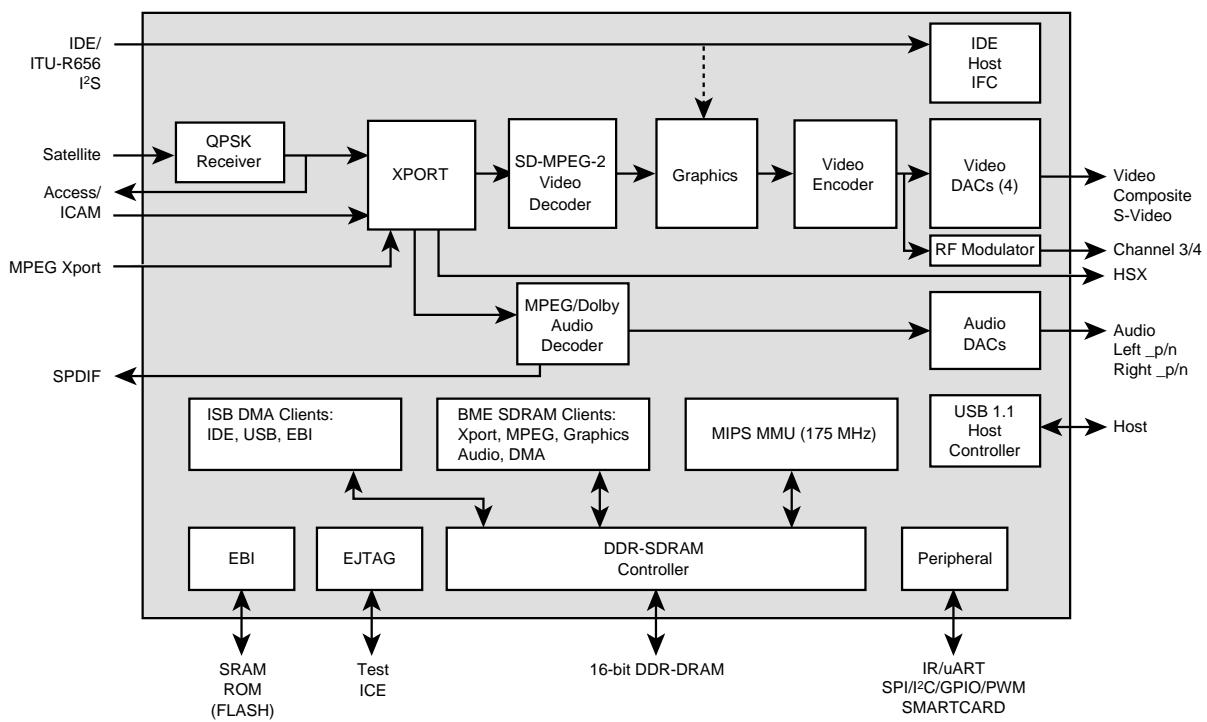

The **BCM7315** is a satellite set-top box system on a single chip, integrating Broadcom's field-proven BCM4500 QPSK Demodulator technology, as well as technology derived from Broadcom's existing cable products such as the BCM7115 cable STB single-chip device.

The **BCM7315** is designed based on a unified memory architecture, (UMA), utilizing 16-bit wide double data rate (DDR) memory for added performance.

The **BCM7315** is complete single chip that can decode transport streams, delivered either via the external BCM3440 CMOS tuner or via the IDE host I/F from an external hard disk drive, or any combination of, and display the resulting decoded audio and video on a television monitor connected to the set-top box. A channel 3-4 RF modulator is also included on-chip to further reduce system design complexity. The on-chip video encoder supports NTSC/ PAL and SECAM with optional Macrovision 7.1 on the output.

The **BCM7315** includes Broadcom's advanced 2D graphics engine, offering true studio-quality text and graphics with extremely efficient use of memory and bandwidth

The **BCM7315** also incorporates a complete industry standard MIPS32™ based microprocessor subsystem, including 8KB Instruction cache, 8 KB Data cache and a 2 KB read ahead cache. Internal bridges to memory and local busses provide support for external peripherals on-chip as well as off-chip. A full range of peripheral devices are supported on the **BCM7315**, including UARTs, dual ISO7816 smart card I/Fs, GPIOs, counters/ timers, IR Tx/Rx, I2C and SPI controllers.

Broadcom®, the pulse logo® and **Connecting Everything**™ are trademarks of Broadcom Corporation and/or its subsidiaries in the United States and certain other countries. **Digicipher II**™ is a trademark of General Instrument (now Motorola). **DIRECTV**® is a registered trademark of DIRECTV, INC., a unit of Hughes Electronics Corporation. **Dolby**® is a trademark of Dolby Laboratories. **MIPS32**™ is a trademark of MIPS Technologies. All other trademarks are the property of their respective owners.

Connecting
everything™