

LINEAR SYSTEMS

Linear Integrated Systems

LS5905 LS5906 LS5907

LS5908 LS5909

**LOW LEAKAGE LOW DRIFT
MONOLITHIC DUAL N-CHANNEL JFET**

FEATURES

LOW DRIFT	$ \Delta V_{GS1-2}/\Delta T = 5\mu V/^{\circ}C$ max.
ULTRA LOW LEAKAGE	$I_G = 150fA$ TYP.
LOW PINCHOFF	$V_P = 2V$ TYP.

ABSOLUTE MAXIMUM RATINGS NOTE 1

@ 25°C (unless otherwise noted)

Maximum Temperatures


Storage Temperature	-65° to +150°C
Operating Junction Temperature	+150°C

Maximum Voltage and Current for Each Transistor NOTE 1

$-V_{GSS}$	Gate Voltage to Drain or Source	40V
$-V_{DSO}$	Drain to Source Voltage	40V
$-I_{G(f)}$	Gate Forward Current	10mA
$-I_G$	Gate Reverse Current	10μA

Maximum Power Dissipation

Device Dissipation @ Free Air - Total	40mW @ +125°C
---------------------------------------	---------------

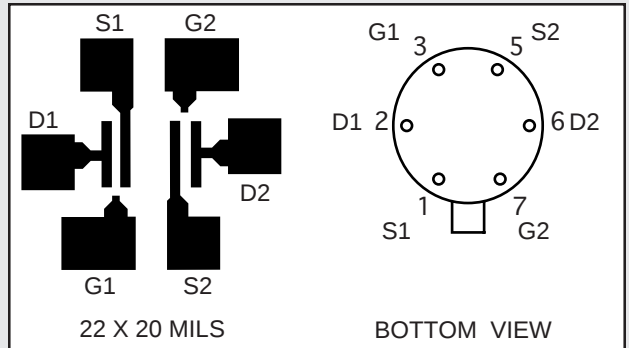

ELECTRICAL CHARACTERISTICS @ 25°C (unless otherwise noted)


SYMBOL	CHARACTERISTICS	LS5906	LS5907	LS5908	LS5909	LS5905	UNITS	CONDITIONS
$ \Delta V_{GS1-2}/\Delta T $ max.	Drift vs. Temperature	5	10	20	40	40	μV/°C	$V_{DG} = 10V$, $I_D = 30\mu A$ $T_A = -55^{\circ}C$ to $+125^{\circ}C$
$ V_{GS1-2} $ max.	Offset Voltage	5	5	10	15	15	mV	$V_{DG} = 10V$, $I_D = 30\mu A$
$-I_G$ max.	Operating	1	1	1	1	3	pA	
$-I_G$ max.	High Temperature	1	1	1	1	3	nA	$T_A = +125^{\circ}C$
$-I_{GSS}$ max.	At Full Conduction	2	2	2	2	5	pA	$V_{DS} = 0V$, $V_{GS} = 20V$
$-I_{GSS}$ max.	High Temperature	5	5	5	5	10	nA	$T_A = +125^{\circ}C$

SYMBOL	CHARACTERISTICS	MIN.	TYP.	MAX.	UNITS	CONDITIONS
BV_{GSS}	Breakdown Voltage	40	60	--	V	$V_{DS} = 0$, $I_D = 1nA$
BV_{GGO}	Gate-to-Gate Breakdown	40	--	--	V	$I_G = 1nA$, $I_D = 0$, $I_S = 0$
Y_{fss}	TRANSCONDUCTANCE Full Conduction	70	300	500	μmho	$V_{DG} = 10V$, $V_{GS} = 0$, $f = 1kHz$
Y_{fs}	Typical Operation	50	100	200	μmho	$V_{DG} = 10V$, $I_D = 30\mu A$, $f = 1kHz$
$ Y_{fs1-2}/Y_{fs} $	Mismatch	--	1	5	%	
I_{DSS}	DRAIN CURRENT Full Conduction	60	400	1000	μA	$V_{DG} = 10V$, $V_{GS} = 0$
$ I_{DSS1-2}/I_{DSS} $	Mismatch at Full Conduction	--	2	5	%	
$V_{GS(off)}$ or V_P	GATE VOLTAGE Pinchoff Voltage	0.6	2	4.5	V	$V_{DS} = 10V$, $I_D = 1nA$
V_{GS}	Operating Range	--	--	4	V	$V_{DS} = 10V$, $I_D = 30\mu A$
I_{GGO}	GATE CURRENT Gate-to-Gate Leakage	--	1	--	pA	$V_{GG} = 20V$

Linear Integrated Systems

4042 Clipper Court, Fremont, CA 94538 • TEL: (510) 490-9160 • FAX: (510) 353-0261

SYMBOL	CHARACTERISTICS	MIN.	TYP.	MAX.	UNITS	CONDITIONS
OUTPUT CONDUCTANCE						
Y_{OSS}	Full Conduction	--	--	5	μmho	$V_{DS} = 10\text{V}$ $V_{GS} = 0$
Y_{OS}	Operating	--	0.1	0.1	μmho	$V_{DS} = 10\text{V}$ $I_D = 30\mu\text{A}$
$ Y_{OS1-2} $	Differential	--	0.01	0.1	μmho	
COMMON MODE REJECTION						
CMR	$-20 \log \Delta V_{GS1-2} / \Delta V_{DS} $	--	90	--	dB	$\Delta V_{DS} = 10 \text{ to } 20\text{V}$ $I_D = 30\mu\text{A}$
CMR	$-20 \log \Delta V_{GS1-2} / \Delta V_{DS} $	--	90	--	dB	$\Delta V_{DS} = 5 \text{ to } 10\text{V}$ $I_D = 30\mu\text{A}$
NOISE						
NF	Figure	--	--	1	dB	$V_{DS} = 10\text{V}$ $V_{GS} = 0$ $R_G = 10\text{M}\Omega$ $f = 100\text{Hz}$ NBW= 6Hz
e_n	Voltage	--	20	70	$\text{nV}/\sqrt{\text{Hz}}$	$V_{DS} = 10\text{V}$ $I_D = 30\mu\text{A}$ $f = 10\text{Hz}$ NBW= 1Hz
CAPACITANCE						
C_{ISS}	Input	--	--	3	pF	$V_{DS} = 10\text{V}$ $V_{GS} = 0$ $f = 1\text{MHz}$
C_{RSS}	Reverse Transfer	--	--	1.5	pF	$V_{DS} = 10\text{V}$ $V_{GS} = 0$ $f = 1\text{MHz}$
C_{DD}	Drain-to-Drain	--	--	0.1	pF	$V_{DG} = 20\text{V}$ $I_D = 30\mu\text{A}$

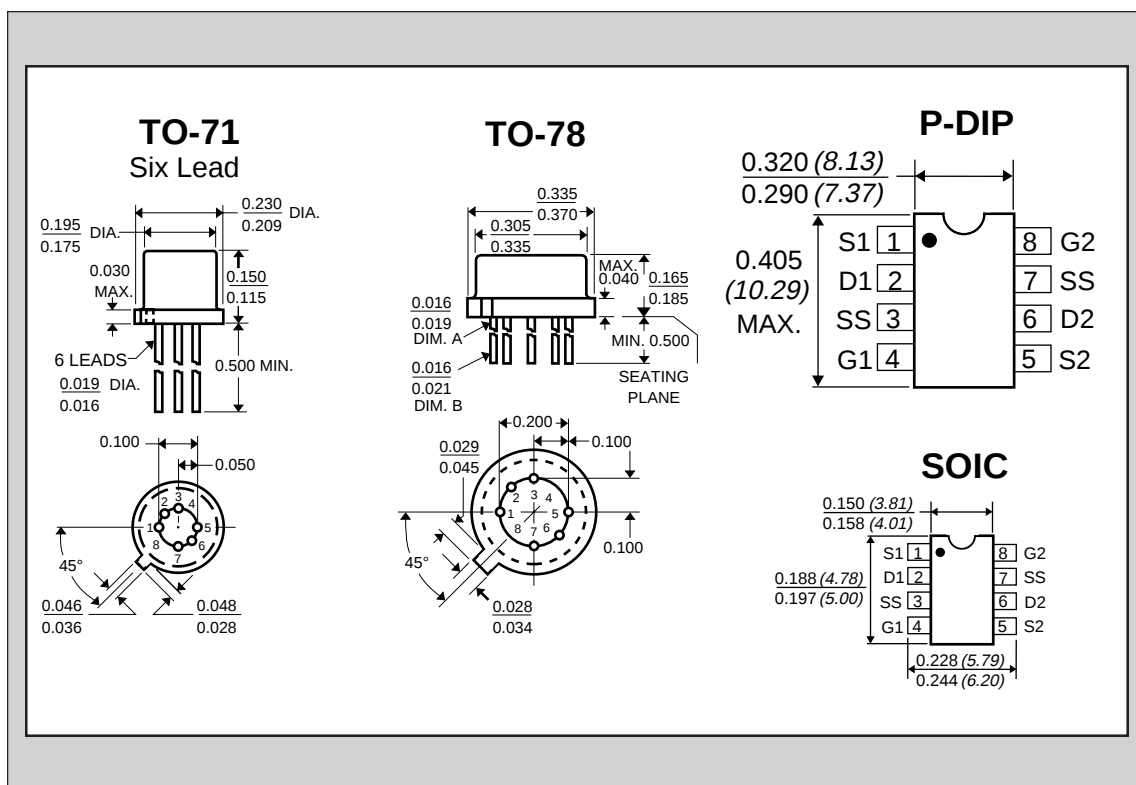

NOTES:

1. These ratings are limiting values above which the serviceability of any semiconductor may be impaired.