

PRODUCT NUMBER
87606-XXXXLF



ROHS COMPATIBLE, SEE NOTE 7
OPTIONAL LETTER SEE NOTE 6

NUMBER OF POSITIONS PER ROW: 02 TO 50.

PLATING CODE

3 = 0.76µm GOLD ON CONTACT AREA.
2µm MIN MATTE TIN ON TAIL.
4 = 2µm MIN MATTE TIN FULL PLATED

8 = 0.38µm GOLD ON CONTACT AREA.
2µm MIN MATTE TIN ON TAIL.
1.27µm Ni MIN UNDERPLATING

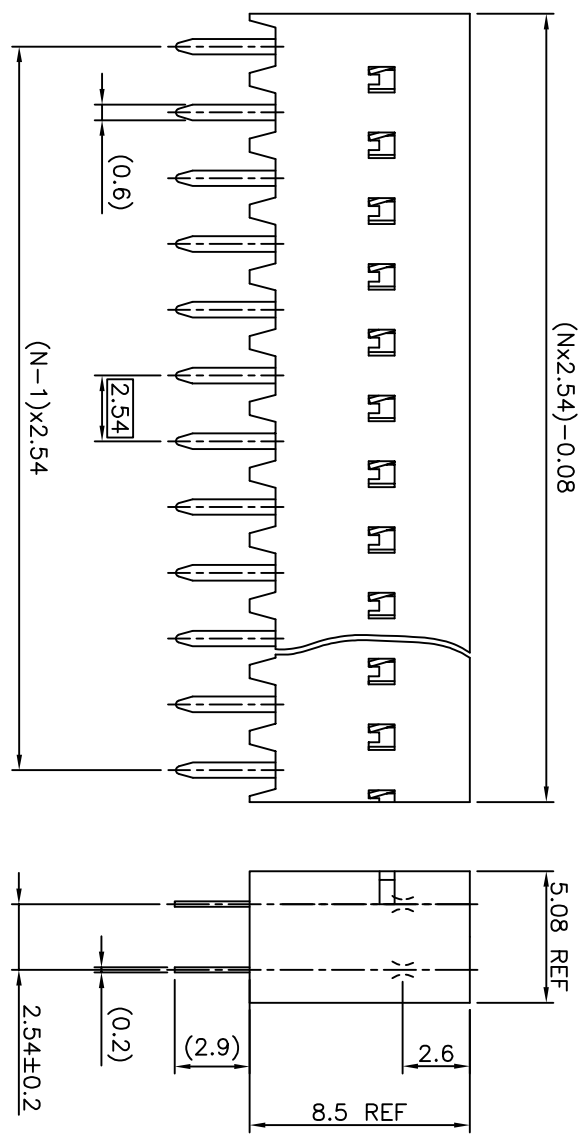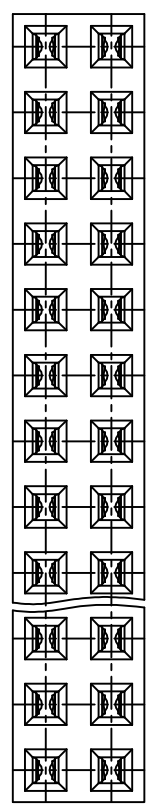

(N x 2.54) - 0.08

5.08 REF

8.5 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(N x 2.54) - 0.08

5.08 REF

2.6

(0.2)

2.54 ± 0.2

(0.6)

2.54

(N-1) x 2.54

5.08 REF

2.6

