


3/8" Square Multi-Turn Cermet Trimmers



The T93 is a small size trimmer - 3/8" x 3/8" x 3/16" - answering PC board mounting requirements.

Five versions are available which differ by the position of the control screw in relation to the PC board plane and by the spacing of the terminals.

Excellent operational stability is provided by the use of a cermet element.



DIMENSIONS in millimeters

FEATURES



- Industrial Grade
- 0.5 Watt at 70°C
- CECC 41 100
- MIL-R-22097
- Good stability
- Contact resistance variation < 1% typical
- Meet MIL-R-22097 specifications

Terminal Spacing on a 2.54 PCB



T93XA

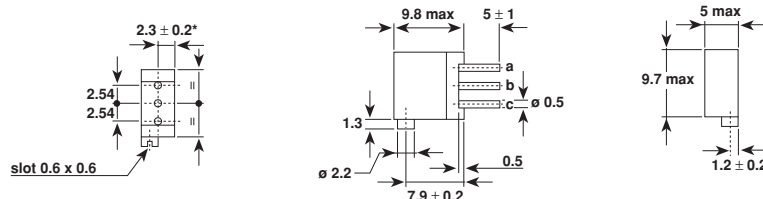



T93XB

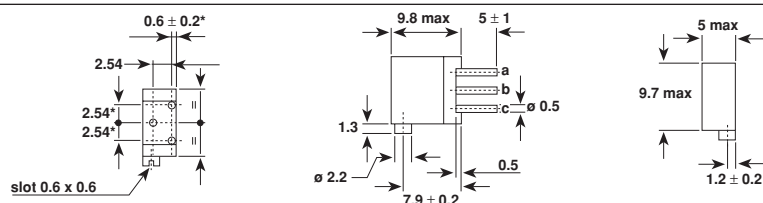



T93YA

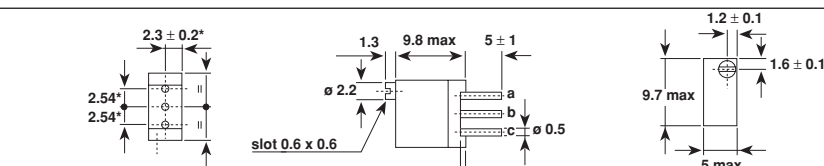


T93YB

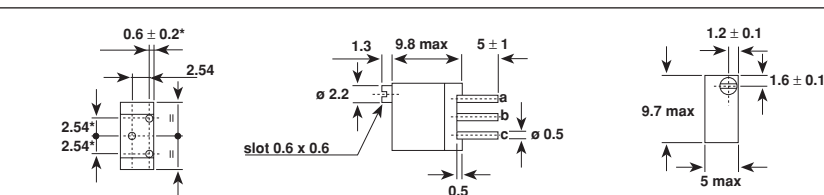

T93Z

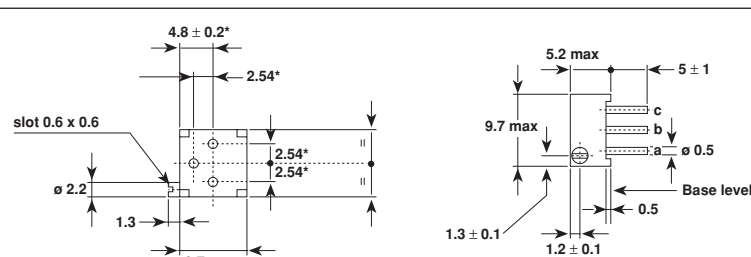

CIRCUIT DIAGRAM



* to be measured at base level

ELECTRICAL SPECIFICATIONS


Resistive Element	cermet	
Electrical Travel	19 turns $\pm$ 2	
Resistance Range	10 Ω to 2.2M Ω	
Standard series E3	1 - 2.2 - 4.7 and on request 1 - 2 - 5	
Tolerance	Standard	$\pm$ 10%
	On Request	$\pm$ 5%
Power Rating	Linear	0.5W at + 70°C
	Logarithmic	not applicable
Temperature Coefficient	See Standard Resistance Element Table	
Limiting Element Voltage (Linear Law)	250V	
Contact Resistance Variation	2% R _n or 2 Ω	
End Resistance (Typical)	1 Ω	
Dielectric Strength (RMS)	1000V	
Insulation Resistance (500VDC)	10 ⁶ M Ω	

MECHANICAL SPECIFICATIONS

Mechanical Travel	22 turns $\pm$ 5
Operating Torque (max. Ncm)	1.5
End Stop Torque	clutch action
Unit Weight (max. g)	1.2

ENVIRONMENTAL SPECIFICATIONS

Temperature Range	- 55°C to + 155°C
Climatic Category	55 / 125 / 56
Sealing	fully sealed container IP67

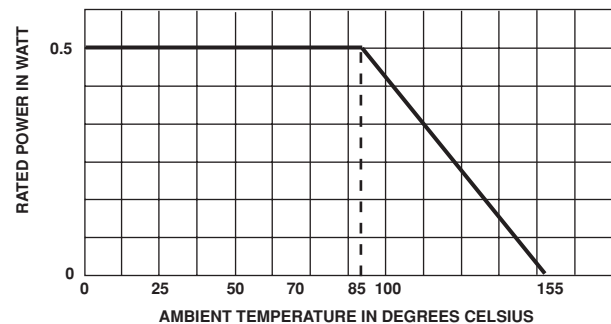POWER RATING CHART**PERFORMANCE**

TESTS	CONDITIONS	TYPICAL VALUES AND DRIFTS	
		$\frac{\Delta R_T}{R_T}$ (%)	$\frac{\Delta R_{1-2}}{R_{1-2}}$ (%)
Load Life	1000 hours at rated power 90°/30° - ambient temp. 70°C	$\pm$ 1% Contact res. variation: < 1% R _n	$\pm$ 2%
Climatic Sequence	Phase A dry heat 125°C - 30% Pr Phase B damp heat Phase C cold - 55°C Phase D damp heat 5 cycles	$\pm$ 0.5%	$\pm$ 1%
Long Term Damp Heat	56 days	$\pm$ 0.5% Dielectric strength: 1000V RMS Insulation resistance: > 10 ⁴ M Ω	$\pm$ 1%
Rapid Temperature Change	5 cycles - 55°C at + 125°C	$\pm$ 0.5%	$\frac{\Delta V_{1-2}}{V_{1-3}} \leq \pm$ 1%
Shock	50 g at 11m secs 3 successive shocks in 3 directions	$\pm$ 0.1%	$\pm$ 0.2%
Vibration	10-55 Hz 0.75mm or 10 g during 6 hours	$\pm$ 0.1%	$\frac{\Delta V_{1-2}}{V_{1-3}} \leq \pm$ 0.2%
Rotational Life	200 cycles	$\pm$ 2% Contact res. variation: < 1% R _n	

**STANDARD RESISTANCE ELEMENT DATA**

STANDARD RESISTANCE VALUES	LINEAR LAW			T.C. -55°C +125°C
	MAX. POWER AT 85°C	MAX. WORKING VOLTAGE	MAX. CUR. THROUGH ELEMENT	
Ω	W	V	mA	ppm/°C
10	0.5	2.2	224	0 +200
22		3.3	150	
47		4.8	103	
100		7	70	± 100
220		10.5	47	
470		15.3	32	
1k		22.4	22	
2.2k		33.2	15	
4.7k		48.5	10	
10k		70.7	7	
22k		105	4.8	
47k		153	3.2	
100k	0.5	224	2.2	
220k	0.28	250	1.1	
470k	0.13	250	0.53	
1M	0.06	250	0.25	
2.2M	0.028	250	0.11	

MARKING

Printed:

- VISHAY trademark
- series
- style
- ohmic value (in Ω , k Ω , M Ω)
- tolerance (in %)
- manufacturing date
- marking of terminal 3

PACKAGING

- In magazine pack by 50 pieces (tube) code "TU50".

ORDERING INFORMATION

T93 SERIES	XA VERSION	220k Ω OHMIC VALUE	± 10% TOLERANCE	TU50 PACKAGING
				TU50 : Tube

NB. On delivery the wiper is positioned at mid-level.

SAP PART NUMBERING GUIDELINES

T	9	3	X	A	2	2	4	K	T	2	0			
MODEL				STYLE		OHMIC VALUE		TOL	PACKAGING CODE			SPECIAL (IF APPLICABLE)		

See the end of this data book for conversion tables