Date	SYM	REVISION RECORD	AUTH	DR.	CK.
4/22/06	A	Added "ROHS COMPLIANT"	T.B.	B.S.	
5/02/08	B	Updated note	T.B.	B.S.	
7/11/14	C	Updated to ROHS 2 Compliant	T.B.	B.S.	

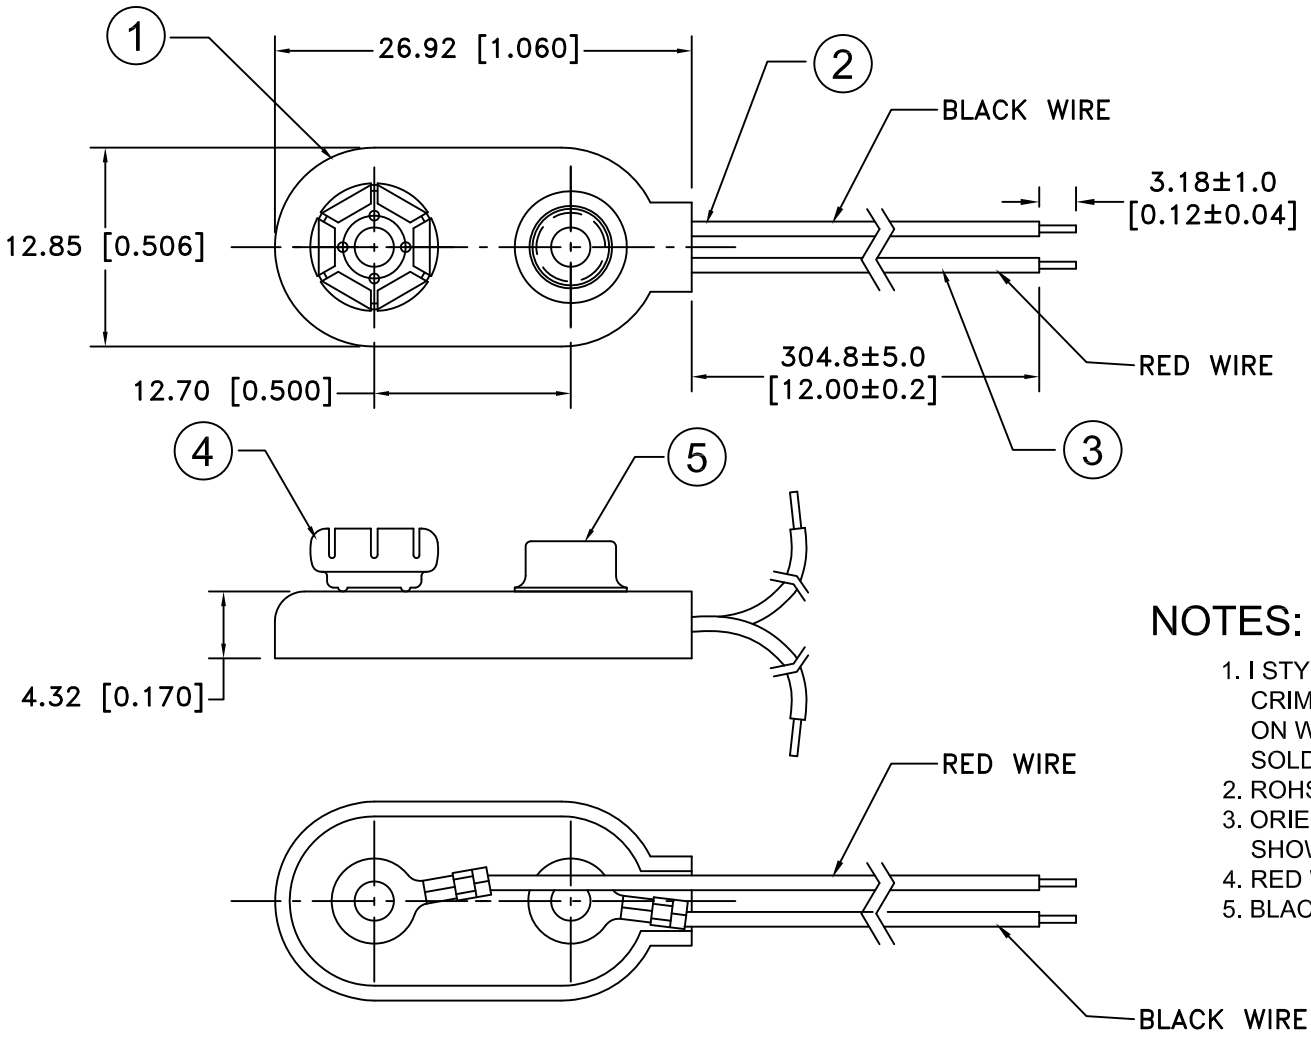

NOTES:

1. I STYLE 2 PCS. MOLDED CASE CONSTRUCTION WITH CRIMP CONNECTIONS. CRIMP ON WIRE INSULATION AND ON WIRE PROVIDES STRAIN RELIEF THAT STANDARD SOLDERED SNAPS DO NOT HAVE.
2. ROHS 2 COMPLIANT
3. ORIENTATION OF SNAPS AND WIRES VARIES AND IS SHOWN FOR REFERENCE ONLY.
4. RED WIRE TO POSITIVE CONTACT.
5. BLACK WIRE TO NEGATIVE CONTACT.

N0.	PART NAME	MATERIAL	QTY.
1	MOLDED CASE	2 PCS., POLYETHYLENE, WHITE WITH BLUE INSERT	1
2	BLACK WIRE(-)	24 AWG OR 26 AWG, UL-1007, CSA TR-64, 300V, 80°C	1
3	RED WIRE (+)	24 AWG OR 26 AWG, UL-1007, CSA TR-64, 300V, 80°C	1
4	FEMALE SNAP	BRASS NICKLE PLATED	1
5	MALE SNAP	BRASS NICKLE PLATED	1

Tolerance (Except as noted)

decimal ±.5 (.020)

Fractional ± .8 (.030)

Angular ± 3°

MPD Memory Protection Devices, Inc

200 Broad Hollow Road, Farmingdale, New York 11735

Scale

Drawn By B.S.

Approved By T.B.

Title: 9 VOLT BATTERY SNAP–I STYLE–12" WIRE LEADS, MOLDED CASE

Date: 7/11/14

Drawing Number: BS12I–MC