

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

H

—

E

ECR-05-006211

13JUL05

CJF

JB


NOTES:

① PHOSPHORBRONZE.

② PLATING : AREA Δ Sn PLATE TO ASTM B 545.
NI UNDERCOAT TO ASTM B 571 ALL OVER③ PLATING : Sn PLATE TO ASTM B 545
AND NI UNDERCOAT TO ASTM B 571 ALL OVER

④ QUANTITY PER PACKAGE 1500 PCS.

SECTION A-A

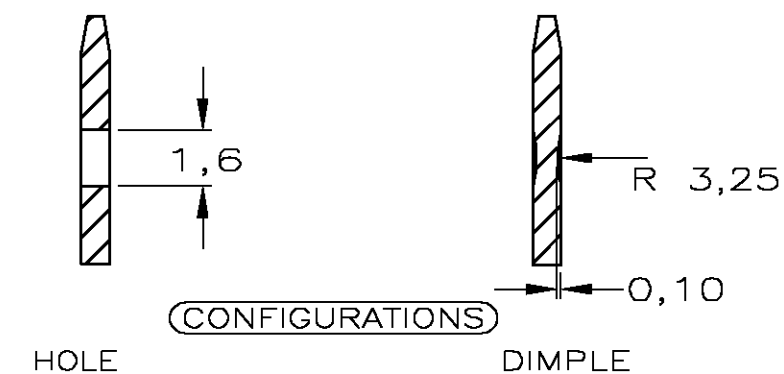

DIMPLE	④②	①	1-215268-2
HOLE	②	①	215268-7
HOLE	③	①	215268-6
—	—	①	—
DIMPLE	③	①	215268-3
DIMPLE	②	①	215268-2
CONFIGURATION	FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S.Meeuwssen 15JAN93

CHK R.v.Lokven 22JAN93

APVD L.v.Soest 26JAN93

PRODUCT SPEC

108-19059

APPLICATION SPEC

—

WEIGHT —

CUSTOMER DRAWING

Tyco Electronics Corporation

s-Hertogenbosch, Nederland,

NAME

8 POS. POWER LINKING TERMINAL

WITH ACTION PIN

(RIGHT HANDED VERSION)

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-215268

—

SCALE 4:1

SHEET


1

OF

1

REV

E

DIMENSIONS:
MMTOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±—
1 PLC ±—
2 PLC ±—
3 PLC ±—
4 PLC ±—
ANGLES ±—
FINISH —

MATERIAL

—

FINISH

—