


(2.54 mm) .100"

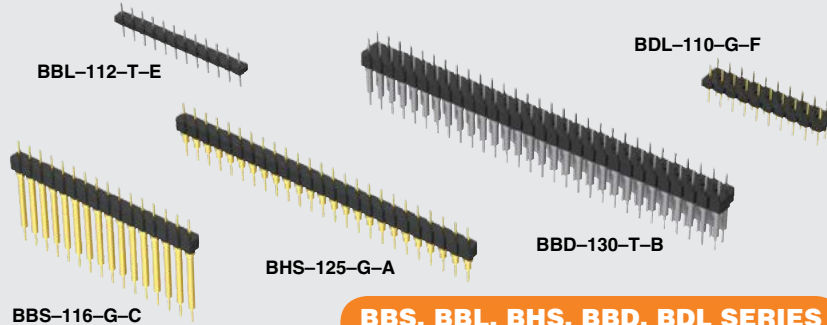

BBS, BBL, BHS, BBD, BDL SERIES

# MACHINED BOARD STACKING STRIPS

## Mates with:

SS, SD, HSS, SL, SDL,  
ESS, ESD

## FEATURES

- Low-profile design achieves (3.89 mm) .153" board spacings when mated with SL Series.
- Approach the reliability of a permanent connection with the flexibility of a separable connection.

## SPECIFICATIONS

### Insulator Material:

Black Glass Filled Polyester (BBS, BBD, BBL)

Black High Temp Nylon (BDL)

Black Liquid Crystal Polymer (BHS)

### Temperature Range:

-55 °C to +125 °C

### Terminal Material:

Phosphor Bronze or Brass

### Plating:

Au or Sn over 50 μ" (1.27 μm) Ni

### RoHS Compliant:

Yes

### Lead-Free Solderable:

Wave only

(BBS, BBD, BBL, BDL)

Wave, or reflow with

all Au (BHS)




## RECOGNITIONS



FILE NO. E111594

### Note:

Some lengths, styles and options are non-standard, non-returnable.

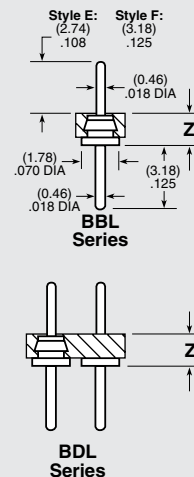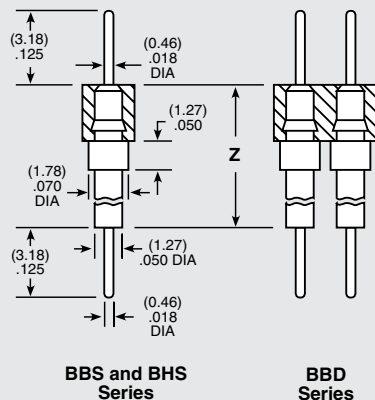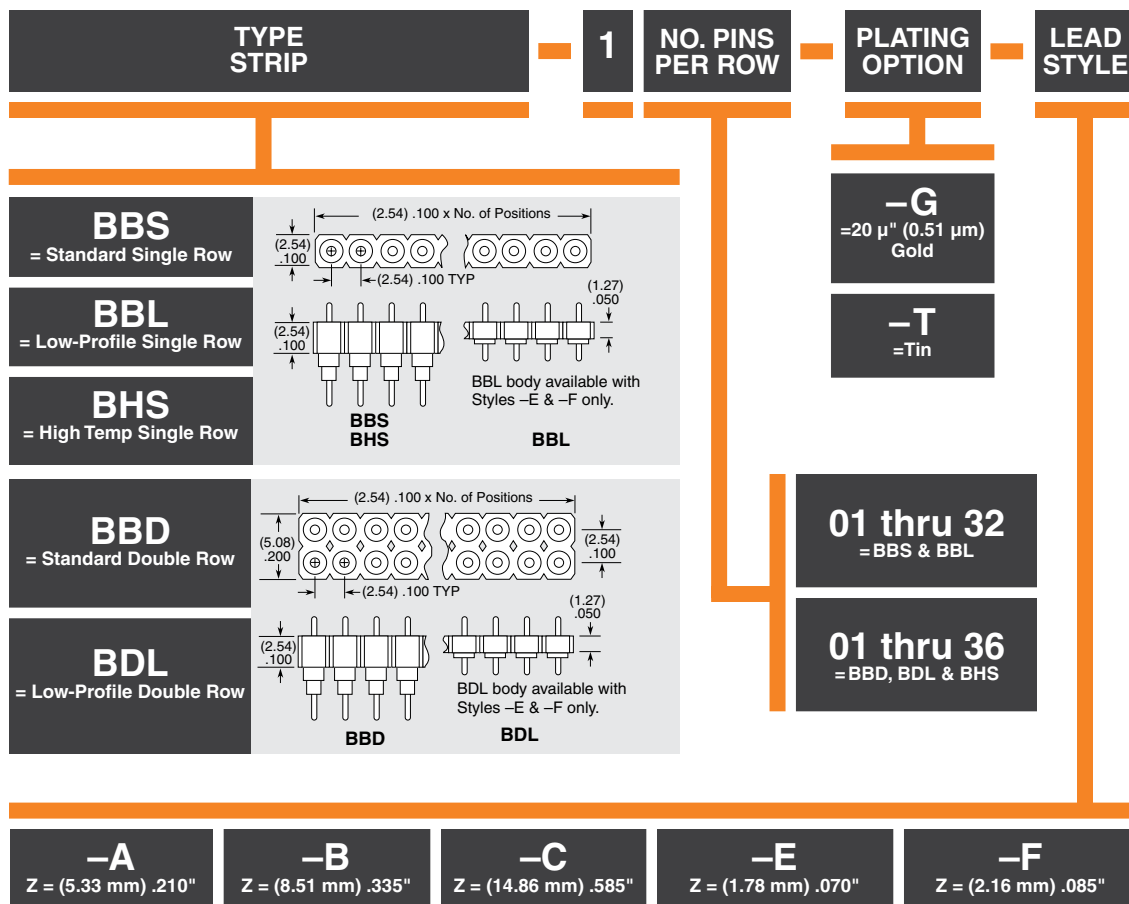

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.TOBY.CO.UK](http://WWW.TOBY.CO.UK)

All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.