

Technical Data Sheet

Wave-X Heat

Shrink Tube Absorber

Description: A heat-shrinkable tube absorber. Wave-X Heat can be seamlessly integrated with wire and cable assemblies. It neatly seals junction and connector interfaces while absorbing unwanted EMI interference. When moderate heat is applied Wave-X Heat shrinks to approximately a 3:1 ratio.

Typical Test Results for 0.040"

Tensile (2 in/min): 1623 psi

Elongation (2 in/min): 596%

Tensile After Heat Aging (2 in/min): 1226 psi

Heat Shock (4 Hours @ 225C): Pass


Low Temperature Flexibility (4 Hours @ -55C): Pass

Linear Shrink (3 Minutes @ 200C): -5%

Flammability Ratings: UL-224 and UL-94-V2

Typical Wave-X Heat Size Availability

<u>Part Number</u>	<u>Expanded Internal Diameter</u>	<u>Recovered Internal Diameter</u>	<u>Absorber Wall Thickness</u>
WH-A188-020	3/16" (4.7mm)	0.060" (1.5mm)	0.020" (0.5mm)
WH-A375-040	3/8" (9.5mm)	0.125" (3.2mm)	0.040" (1.0mm)
WH-A750-040	3/4" (19.1mm)	0.250" (6.4mm)	0.040" (1.0mm)
WH-A100-080	1" (25.4mm)	0.320" (8.1mm)	0.080" (2.0mm)

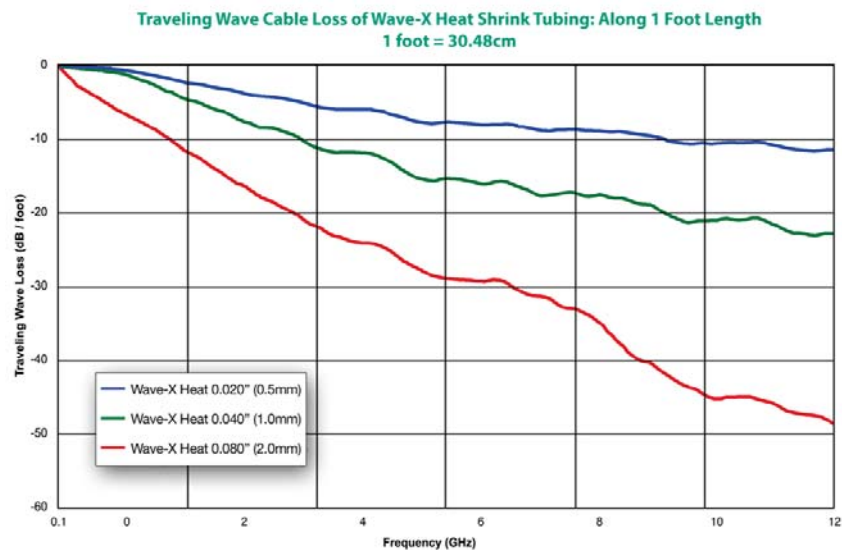

Solutions for Interference Control

ARC Technologies, Inc.
11 Chestnut Street, Amesbury, MA 01913
978-388-2993 Fax: 978-388-6866
www.arc-tech.com