


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		Y	REVISED PER ECO-12-011709	26JUN2012	RW	SY

D

C

B

A

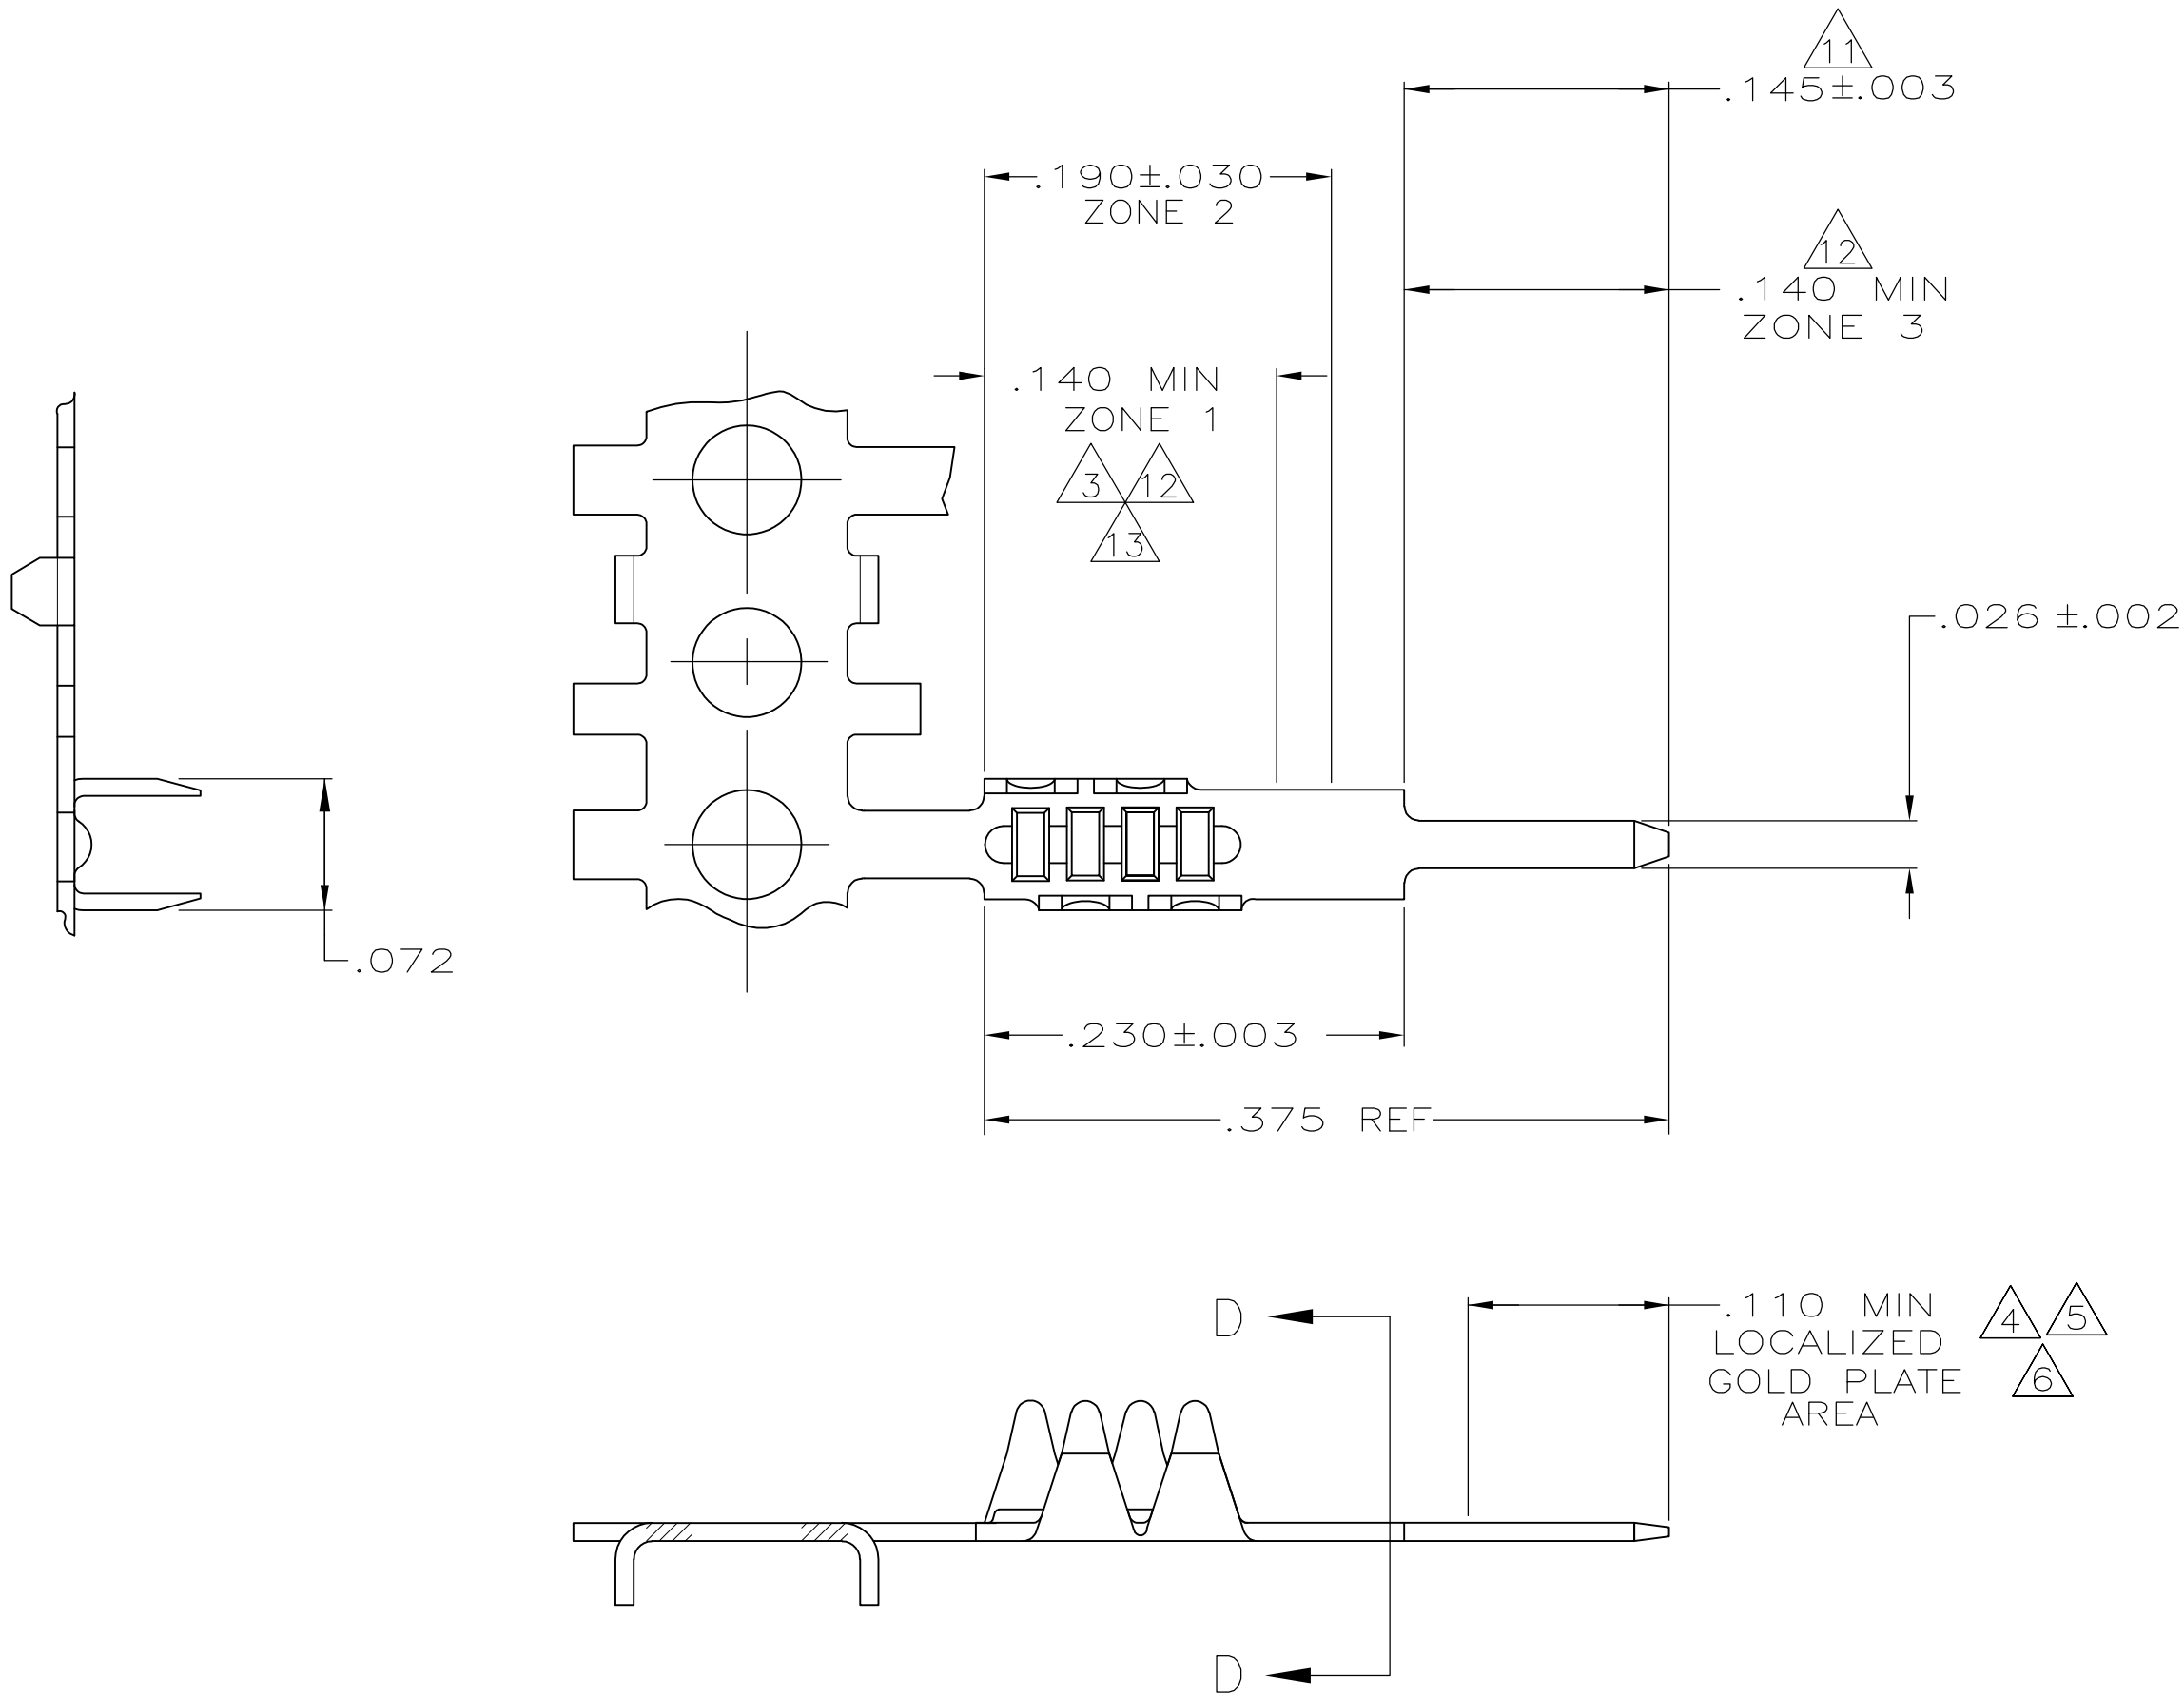

- 1. .000050 MIN THK NICKEL UNDERPLATE OVER ENTIRE CONTACT.
- 2. .000150 MIN BRIGHT TIN/LEAD OVER ENTIRE CONTACT.
- 3. .000100 MIN THK BRIGHT TIN/LEAD IN ZONE 1.
- 4. GOLD FLASH IN LOCALIZED GOLD PLATE AREA.
- 5. .000015 MIN GOLD IN LOCALIZED GOLD PLATE AREA
- 6. .000030 MIN GOLD IN LOCALIZED GOLD PLATE AREA
- 7. TO BE APPLIED PER AMP APPLICATION SPEC 114-16015.
- 8. RECOMMENDED HOLE SIZE IS .031-.035 DIA.
- 9. FOR SOLDERABILITY SEE AMP PRODUCT SPEC 108-9024.
- 10. .000150 MIN TIN-LEAD IN ZONE 2.
- 11. AREA TO BE UNPLATED (-9 ONLY).
- 12. GOLD FLASH IN ZONE 1. .000150 MIN TIN IN ZONE 3.
- 13. GOLD FLASH IN ZONE 1.
- 14. GOLD PLATING MAY OR MAY NOT BE PRESENT ON THE BOTTOM OF THE CRIMP BARREL IN THIS AREA.

D

C


88997

B

A

				1-88997-4
				1-88997-3
				1-88997-2
				88997-9
				88997-5
				88997-4
				88997-3
				88997-2
FINISH				PART NO

SUPERSEDED BY 88997-5

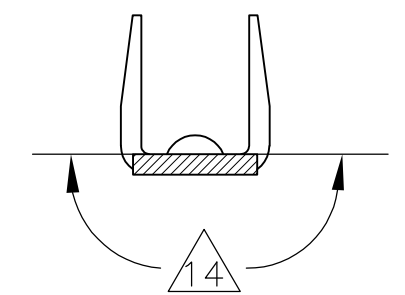

SECTION D-D

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MCMASTER 10MAR04	TE Connectivity			
DIMENSIONS: INCHES		CHK S. BOLASH 10MAR04				
		APVD M. WALMSLEY 10MAR04	NAME			
		PRODUCT SPEC 108-9024	CONTACT, SOLDER TAB, FFC, .100 ϕ			
MATERIAL PH. BRONZE .010 THK		APPLICATION SPEC 114-16015	SIZE A2	CAGE CODE 00779	DRAWING NO C=88997	RESTRICTED TO -
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC $\pm$ - 1 PLC $\pm$ - 2 PLC $\pm$ - 3 PLC $\pm$.005 4 PLC $\pm$ - ANGLES $\pm$ - FINISH SEE TABLE		WEIGHT -	CUSTOMER DRAWING			
		SCALE 10:1	SHEET 1 of 1	REV Y		