

## Low Power, High Speed Operational Amplifier

### FEATURES

- Gain-Bandwidth Product: 50MHz
- Unity-Gain Stable
- Slew Rate: 165V/ $\mu$ s
- Output Current:  $\pm 20$ mA
- Low Supply Current: 12mA
- High Open-Loop Gain: 7.5V/mV
- Low Cost
- Single Supply 5V Operation
- Industry Standard Pinout
- Output Shutdown

### APPLICATIONS

- Video Cable Drivers
- Video Signal Processing
- Fast Peak Detectors
- Fast Integrators
- Video Cable Drivers
- Pulse Amplifiers

### DESCRIPTION

The LT<sup>®</sup>1195 is a video operational amplifier optimized for operation on single 5V and  $\pm 5$ V supplies. Unlike many high speed amplifiers, the LT1195 features high open-loop gain, over 75dB, and the ability to drive heavy loads to a full power bandwidth of 8.5 MHz at 6V<sub>P-P</sub>. The LT1195 has a unity-gain stable bandwidth of 50MHz, a 60° phase margin and consumes only 12mA of supply current, making it extremely easy to use.


Because the LT1195 is a true operational amplifier, it is an ideal choice for wideband signal conditioning, fast integrators, peak detectors, active filters, and applications requiring speed, accuracy, and low cost.

The LT1195 is a low power version of the popular LT1190, and is available in 8-pin miniDIPs and SO packages with standard pinouts. The normally unused Pin 5 is used for a shutdown feature that shuts off the output and reduces power dissipation to a mere 15mW.

 , LTC and LT are registered trademarks of Linear Technology Corporation


### TYPICAL APPLICATION

**Fast Pulse Detector**

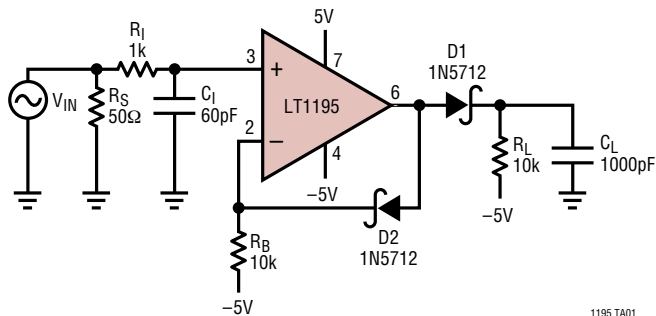

1195 TA01

**Pulse Detector Response**

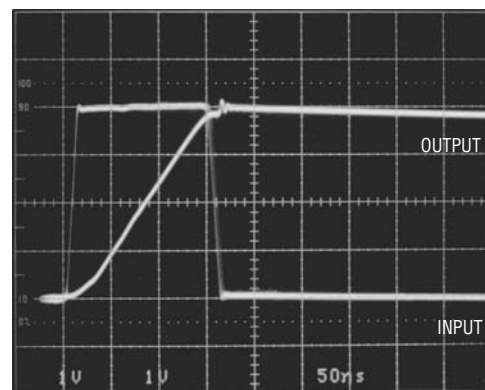

1195TA02

# ABSOLUTE MAXIMUM RATINGS

(Note 1)

|                                                |                                            |
|------------------------------------------------|--------------------------------------------|
| Total Supply Voltage ( $V^+$ to $V^-$ )        | 18V                                        |
| Differential Input Voltage                     | $\pm 6V$                                   |
| Input Voltage                                  | $\pm V_S$                                  |
| Output Short-Circuit Duration (Note 2)         | Continuous                                 |
| Operating Temperature Range                    |                                            |
| LT1195M ( <b>OBSOLETE</b> )                    | $-55^\circ\text{C}$ to $125^\circ\text{C}$ |
| LT1195C                                        | $0^\circ\text{C}$ to $70^\circ\text{C}$    |
| Junction Temperature (Note 3)                  |                                            |
| Plastic Package (CN8, CS8)                     | $150^\circ\text{C}$                        |
| Ceramic Package (CJ8, MJ8) ( <b>OBSOLETE</b> ) | $175^\circ\text{C}$                        |
| Storage Temperature Range                      | $-65^\circ\text{C}$ to $150^\circ\text{C}$ |
| Lead Temperature (Soldering, 10 sec)           | $300^\circ\text{C}$                        |

# PACKAGE/ORDER INFORMATION

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                        |                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------|
| <p>TOP VIEW</p> <p>N8 PACKAGE<br/>8-LEAD PDIP</p> <p>S8 PACKAGE<br/>8-LEAD PLASTIC SO</p> <p>J8 PACKAGE<br/>8-LEAD CERDIP</p> <p><math>T_{JMAX} = 150^\circ\text{C}</math>, <math>\theta_{JA} = 100^\circ\text{C/W}</math> (N8)<br/> <math>T_{JMAX} = 150^\circ\text{C}</math>, <math>\theta_{JA} = 150^\circ\text{C/W}</math> (S8)<br/> <math>T_{JMAX} = 150^\circ\text{C}</math>, <math>\theta_{JA} = 100^\circ\text{C/W}</math> (J8)</p> <p><b>OBSOLETE PACKAGE</b><br/>Consider the N8 or S8 Package for Alternate Source</p> | ORDER PART NUMBER      |                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | LT1195CN8<br>LT1195CS8 |                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | S8 PART MARKING        |                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 1195                   |                        |
| ORDER PART NUMBER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                        | LT1195MJ8<br>LT1195CJ8 |

Consult LTC Marketing for parts specified with wider operating temperature ranges.

# $\pm 5V$ ELECTRICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$

$V_S = \pm 5V$ ,  $C_L \leq 10pF$ , Pin 5 open circuit, unless otherwise noted.

| SYMBOL              | PARAMETER                    | CONDITIONS                                               | LT1195M/C |            |             | UNITS                 |
|---------------------|------------------------------|----------------------------------------------------------|-----------|------------|-------------|-----------------------|
|                     |                              |                                                          | MIN       | TYP        | MAX         |                       |
| $V_{OS}$            | Input Offset Voltage         | J8, N8 Package<br>S8 Package                             |           | 3.0<br>3.0 | 8.0<br>10.0 | mV<br>mV              |
| $I_{OS}$            | Input Offset Current         |                                                          |           | 0.2        | 1.0         | $\mu A$               |
| $I_B$               | Input Bias Current           |                                                          |           | $\pm 0.5$  | $\pm 2.0$   | $\mu A$               |
| $e_n$               | Input Noise Voltage          | $f_0 = 10\text{kHz}$                                     |           | 70         |             | $nV/\sqrt{\text{Hz}}$ |
| $i_n$               | Input Noise Current          | $f_0 = 10\text{kHz}$                                     |           | 2          |             | $pA/\sqrt{\text{Hz}}$ |
| $R_{IN}$            | Input Resistance             | Differential Mode                                        |           | 230        |             | $k\Omega$             |
|                     |                              | Common Mode                                              |           | 20         |             | $M\Omega$             |
| $C_{IN}$            | Input Capacitance            | $A_V = 1$                                                |           | 2.2        |             | pF                    |
|                     | Input Voltage Range          | (Note 4)                                                 | -2.5      |            | 3.5         | V                     |
| CMRR                | Common Mode Rejection Ratio  | $V_{CM} = -2.5$ to $3.5V$                                | 60        | 85         |             | dB                    |
| PSRR                | Power Supply Rejection Ratio | $V_S = \pm 2.375V$ to $\pm 8V$                           | 60        | 85         |             | dB                    |
| $A_{VOL}$           | Large-Signal Voltage Gain    | $R_L = 1k$ , $V_{OUT} = \pm 3V$                          | 2.0       | 7.5        |             | V/mV                  |
|                     |                              | $R_L = 150\Omega$ , $V_{OUT} = \pm 3V$                   | 0.5       | 1.5        |             | V/mV                  |
|                     |                              | $V_S = \pm 8V$ , $R_L = 1k$ , $V_{OUT} = \pm 5V$         |           | 11.0       |             | V/mV                  |
| $V_{OUT}$           | Output Voltage Swing         | $V_S = \pm 5V$ , $R_L = 1k$                              | $\pm 3.8$ | $\pm 4.0$  |             | V                     |
|                     |                              | $V_S = \pm 8V$ , $R_L = 1k$                              | $\pm 6.7$ | $\pm 7.0$  |             | V                     |
| SR                  | Slew Rate                    | $A_V = -1$ , $R_L = 1k$ (Note 5, 10)                     | 110       | 165        |             | V/ $\mu s$            |
| FPBW                | Full Power Bandwidth         | $V_{OUT} = 6V_{P-P}$ (Note 6)                            |           | 8.75       |             | MHz                   |
| GBW                 | Gain-Bandwidth Product       |                                                          |           | 50         |             | MHz                   |
| $t_{r1}$ , $t_{f1}$ | Rise Time, Fall Time         | $A_V = 50$ , $V_{OUT} = \pm 1.5V$ , 20% to 80% (Note 10) | 125       | 170        | 285         | ns                    |
| $t_{r2}$ , $t_{f2}$ | Rise Time, Fall Time         | $A_V = 1$ , $V_{OUT} = \pm 125mV$ , 10% to 90%           |           | 3.4        |             | ns                    |
| $t_{PD}$            | Propagation Delay            | $A_V = 1$ , $V_{OUT} = \pm 125mV$ , 50% to 50%           |           | 2.5        |             | ns                    |
|                     | Overshoot                    | $A_V = 1$ , $V_{OUT} = \pm 125mV$                        |           | 22         |             | %                     |
| $t_s$               | Settling Time                | 3V Step, 0.1% (Note 7)                                   |           | 220        |             | ns                    |
| Diff $A_V$          | Differential Gain            | $R_L = 150\Omega$ , $A_V = 2$ (Note 8)                   |           | 1.25       |             | %                     |
| Diff Ph             | Differential Phase           | $R_L = 150\Omega$ , $A_V = 2$ (Note 8)                   |           | 0.86       |             | DEG $_{P-P}$          |

1195fa

**±5V ELECTRICAL CHARACTERISTICS**  $T_A = 25^\circ\text{C}$  $V_S = \pm 5\text{V}$ ,  $C_L \leq 10\text{pF}$ , Pin 5 open circuit, unless otherwise noted.

| SYMBOL    | PARAMETER               | CONDITIONS                                     | LT1195M/C |     |     | UNITS         |
|-----------|-------------------------|------------------------------------------------|-----------|-----|-----|---------------|
|           |                         |                                                | MIN       | TYP | MAX |               |
| $I_S$     | Supply Current          |                                                |           | 12  | 16  | mA            |
|           | Shutdown Supply Current | Pin 5 at $V^-$                                 |           | 0.8 | 1.5 | mA            |
| $I_{S/D}$ | Shutdown Pin Current    | Pin 5 at $V^-$                                 |           | 5   | 25  | $\mu\text{A}$ |
| $t_{ON}$  | Turn-On Time            | Pin 5 from $V^-$ to Ground, $R_L = 1\text{k}$  |           | 160 |     | ns            |
| $t_{OFF}$ | Turn-Off Time           | Pin 5 from Ground to $V^-$ , $R_L = 1\text{k}$ |           | 700 |     | ns            |

**5V ELECTRICAL CHARACTERISTICS**  $T_A = 25^\circ\text{C}$  $V_S^+ = 5\text{V}$ ,  $V_S^- = 0\text{V}$ ,  $V_{CM} = 2.5\text{V}$ ,  $C_L \leq 10\text{pF}$ , Pin 5 open circuit, unless otherwise noted.

| SYMBOL    | PARAMETER                   | CONDITIONS                                                        | LT1195M/C |            |             | UNITS            |
|-----------|-----------------------------|-------------------------------------------------------------------|-----------|------------|-------------|------------------|
|           |                             |                                                                   | MIN       | TYP        | MAX         |                  |
| $V_{OS}$  | Input Offset Voltage        | J8, N8 Package<br>S8 Package                                      |           | 3.0<br>3.0 | 9.0<br>11.0 | mV<br>mV         |
| $I_{OS}$  | Input Offset Current        |                                                                   |           | 0.2        | 1.0         | $\mu\text{A}$    |
| $I_B$     | Input Bias Current          |                                                                   |           | $\pm 0.5$  | $\pm 2.0$   | $\mu\text{A}$    |
|           | Input Voltage Range         | (Note 4)                                                          | 2.0       |            | 3.5         | V                |
| CMRR      | Common Mode Rejection Ratio | $V_{CM} = 2\text{V}$ to $3.5\text{V}$                             | 60        | 85         |             | dB               |
| $A_{VOL}$ | Large-Signal Voltage Gain   | $R_L = 150\Omega$ to Ground, $V_{OUT} = 1\text{V}$ to $3\text{V}$ | 0.5       | 3.0        |             | V/mV             |
| $V_{OUT}$ | Output Voltage Swing        | $R_L = 150\Omega$ to Ground                                       | 3.5       | 3.8        |             | V                |
|           |                             | $V_{OUT}$ High<br>$V_{OUT}$ Low                                   |           |            |             |                  |
|           |                             |                                                                   |           | 0.25       | 0.4         | V                |
| SR        | Slew Rate                   | $A_V = -1$ , $V_{OUT} = 1\text{V}$ to $3\text{V}$                 |           | 140        |             | V/ $\mu\text{s}$ |
| GBW       | Gain-Bandwidth Product      |                                                                   |           | 45         |             | MHz              |
| $I_S$     | Supply Current              |                                                                   |           | 11         | 15          | mA               |
|           | Shutdown Supply Current     | Pin 5 at $V^-$                                                    |           | 0.8        | 1.5         | mA               |
| $I_{S/D}$ | Shutdown Pin Current        | Pin 5 at $V^-$                                                    |           | 5          | 25          | $\mu\text{A}$    |

**±5V ELECTRICAL CHARACTERISTICS**  $-55^\circ\text{C} \leq T_A \leq 125^\circ\text{C}$ , (Note 11) $V_S = \pm 5\text{V}$ , Pin 5 open circuit, unless otherwise noted.

| SYMBOL                   | PARAMETER                    | CONDITIONS                                    | LT1195M   |           |           | UNITS                        |
|--------------------------|------------------------------|-----------------------------------------------|-----------|-----------|-----------|------------------------------|
|                          |                              |                                               | MIN       | TYP       | MAX       |                              |
| $V_{OS}$                 | Input Offset Voltage         |                                               |           | 3.0       | 15.0      | mV                           |
| $\Delta V_{OS}/\Delta T$ | Input $V_{OS}$ Drift         |                                               |           | 17        |           | $\mu\text{V}/^\circ\text{C}$ |
| $I_{OS}$                 | Input Offset Current         |                                               |           | 0.2       | 2.0       | $\mu\text{A}$                |
| $I_B$                    | Input Bias Current           |                                               |           | $\pm 0.5$ | $\pm 2.5$ | $\mu\text{A}$                |
| CMRR                     | Common Mode Rejection Ratio  | $V_{CM} = -2.5\text{V}$ to $3.5\text{V}$      | 55        | 85        |           | dB                           |
| PSRR                     | Power Supply Rejection Ratio | $V_S = \pm 2.375\text{V}$ to $\pm 8\text{V}$  | 55        | 80        |           | dB                           |
| $A_{VOL}$                | Large-Signal Voltage Gain    | $R_L = 1\text{k}$ , $V_{OUT} = \pm 3\text{V}$ | 1.50      | 5.0       |           | V/mV                         |
|                          |                              | $R_L = 150\Omega$ , $V_{OUT} = \pm 3\text{V}$ | 0.25      | 0.8       |           | V/mV                         |
| $V_{OUT}$                | Output Voltage Swing         | $R_L = 1\text{k}$                             | $\pm 3.7$ | $\pm 3.9$ |           | V                            |
| $I_S$                    | Supply Current               |                                               |           | 12        | 18        | mA                           |
|                          | Shutdown Supply Current      | Pin 5 at $V^-$ , (Note 9)                     |           | 0.8       | 2.5       | mA                           |
| $I_{S/D}$                | Shutdown Pin Current         | Pin 5 at $V^-$                                |           | 5         | 25        | $\mu\text{A}$                |

**±5V ELECTRICAL CHARACTERISTICS**  $0^{\circ}\text{C} \leq T_A \leq 70^{\circ}\text{C}$  $V_S = \pm 5\text{V}$ , Pin 5 open circuit, unless otherwise noted.

| SYMBOL                   | PARAMETER                    | CONDITIONS                                                                                     | LT1195C    |            |              | UNITS                          |
|--------------------------|------------------------------|------------------------------------------------------------------------------------------------|------------|------------|--------------|--------------------------------|
|                          |                              |                                                                                                | MIN        | TYP        | MAX          |                                |
| $V_{OS}$                 | Input Offset Voltage         | J8, N8 Package<br>S8 Package                                                                   |            | 3.0<br>3.0 | 10.0<br>15.0 | mV<br>mV                       |
| $\Delta V_{OS}/\Delta T$ | Input $V_{OS}$ Drift         |                                                                                                |            | 12         |              | $\mu\text{V}/^{\circ}\text{C}$ |
| $I_{OS}$                 | Input Offset Current         |                                                                                                |            | 0.2        | 1.7          | $\mu\text{A}$                  |
| $I_B$                    | Input Bias Current           |                                                                                                |            | $\pm 0.5$  | $\pm 2.5$    | $\mu\text{A}$                  |
| CMRR                     | Common Mode Rejection Ratio  | $V_{CM} = -2.5\text{V}$ to $3.5\text{V}$                                                       | 60         | 85         |              | dB                             |
| PSRR                     | Power Supply Rejection Ratio | $V_S = \pm 2.375\text{V}$ to $\pm 5\text{V}$                                                   | 60         | 90         |              | dB                             |
| $A_{VOL}$                | Large-Signal Voltage Gain    | $R_L = 1\text{k}$ , $V_{OUT} = \pm 3\text{V}$<br>$R_L = 150\Omega$ , $V_{OUT} = \pm 3\text{V}$ | 2.0<br>0.3 | 7.5<br>1.5 |              | V/mV<br>V/mV                   |
| $V_{OUT}$                | Output Voltage Swing         | $R_L = 1\text{k}$                                                                              | $\pm 3.7$  | $\pm 3.9$  |              | V                              |
| $I_S$                    | Supply Current               |                                                                                                |            | 12         | 17           | mA                             |
|                          | Shutdown Supply Current      | Pin 5 at $V^-$ (Note 9)                                                                        |            | 0.9        | 2.0          | mA                             |
| $I_{S/D}$                | Shutdown Pin Current         | Pin 5 at $V^-$                                                                                 |            | 5          | 25           | $\mu\text{A}$                  |

**5V ELECTRICAL CHARACTERISTICS**  $0^{\circ}\text{C} \leq T_A \leq 70^{\circ}\text{C}$  $V_S^+ = 5\text{V}$ ,  $V_S^- = 0\text{V}$ , Pin 5 open circuit, unless otherwise noted.

| SYMBOL                   | PARAMETER                   | CONDITIONS                            | LT1195C |            |              | UNITS                          |
|--------------------------|-----------------------------|---------------------------------------|---------|------------|--------------|--------------------------------|
|                          |                             |                                       | MIN     | TYP        | MAX          |                                |
| $V_{OS}$                 | Input Offset Voltage        | J8, N8 Package<br>S8 Package          |         | 1.0<br>1.0 | 10.0<br>15.0 | mV<br>mV                       |
| $\Delta V_{OS}/\Delta T$ | Input $V_{OS}$ Drift        |                                       |         | 15         |              | $\mu\text{V}/^{\circ}\text{C}$ |
| $I_{OS}$                 | Input Offset Current        |                                       |         | 0.2        | 1.7          | $\mu\text{A}$                  |
| $I_B$                    | Input Bias Current          |                                       |         | $\pm 0.5$  | $\pm 2.5$    | $\mu\text{A}$                  |
|                          | Input Voltage Range         | (Note 4)                              | 2.0     |            | 3.5          | V                              |
| CMRR                     | Common Mode Rejection Ratio | $V_{CM} = 2\text{V}$ to $3.5\text{V}$ | 60      | 85         |              | dB                             |
| $V_{OUT}$                | Output Voltage Swing        | $R_L = 150\Omega$ to Ground           |         |            |              |                                |
|                          |                             | $V_{OUT}$ High                        | 3.5     | 3.75       |              | V                              |
|                          |                             | $V_{OUT}$ Low                         |         | 0.15       | 0.4          | V                              |
| $I_S$                    | Supply Current              |                                       |         | 12         | 16           | mA                             |
|                          | Shutdown Supply Current     | Pin 5 at $V^-$ (Note 9)               |         | 0.9        | 2.0          | mA                             |
| $I_{S/D}$                | Shutdown Pin Current        | Pin 5 at $V^-$                        |         | 5          | 25           | $\mu\text{A}$                  |

**Note 1:** Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

**Note 2:** A heat sink may be required to keep the junction temperature below absolute maximum when the output is shorted continuously.

**Note 3:**  $T_J$  is calculated from the ambient temperature  $T_A$  and power dissipation  $P_D$  according to the following formats:

$$\text{LT1195MJ8/LT1195CJ8: } T_J = T_A + (P_D \cdot 100^{\circ}\text{C/W})$$

$$\text{LT1195N: } T_J = T_A + (P_D \cdot 100^{\circ}\text{C/W})$$

$$\text{LT1195CS: } T_J = T_A + (P_D \cdot 150^{\circ}\text{C/W})$$

**Note 4:** Exceeding the input common mode range may cause the output to invert.

**Note 5:** Slew rate is measured between  $\pm 1\text{V}$  on the output, with  $\pm 3\text{V}$  input step.

**Note 6:** Full power bandwidth is calculated from the slew rate measurement:  $\text{FPBW} = \text{SR}/2\pi V_P$ .

**Note 7:** Settling time measurement techniques are shown in "Take the Guesswork Out of Settling Time Measurements," EDN, September 19, 1985.

**Note 8:** NTSC (3.58MHz). For  $R_L = 1\text{k}$ , Diff  $A_V = 0.3\%$ , Diff  $\text{Ph} = 0.35^{\circ}$ .


**Note 9:** See Applications Information section for shutdown at elevated temperatures. Do not operate the shutdown above  $T_J > 125^{\circ}\text{C}$ .

**Note 10:** AC parameters are 100% tested on the ceramic and plastic DIP packaged parts (J8 and N8 suffix) and are sample tested on every lot of the SO packaged parts (S8 suffix).

**Note 11:** Do not operate at  $A_V < 2$  for  $T_A < 0^{\circ}\text{C}$ .


# TYPICAL PERFORMANCE CHARACTERISTICS

**Input Bias Current vs Common Mode Voltage**

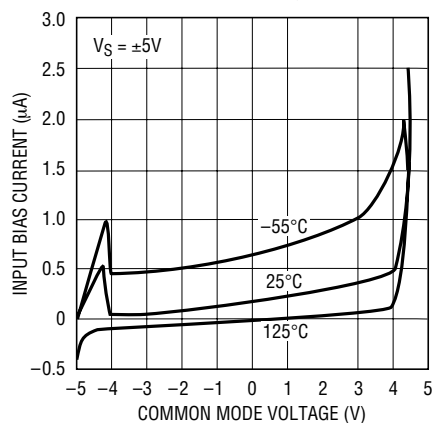


1195 G01

**Input Bias Current vs Temperature**

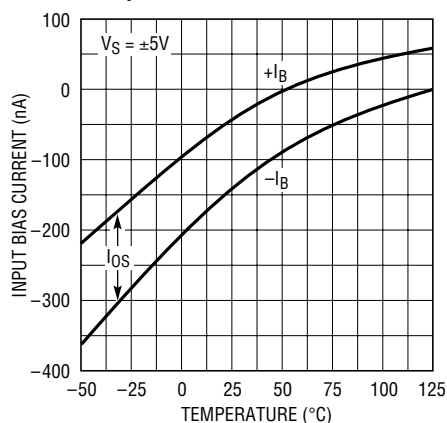


1195 G02

**Common Mode Voltage vs Temperature**

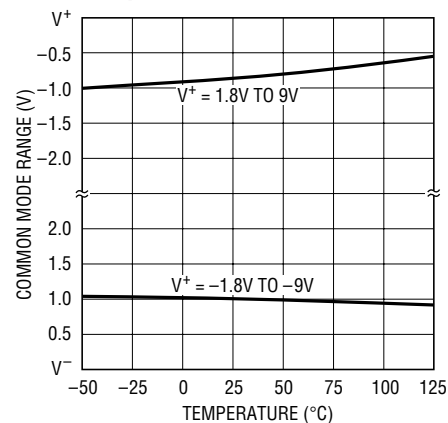


1195 G03

**Equivalent Input Noise Voltage vs Frequency**

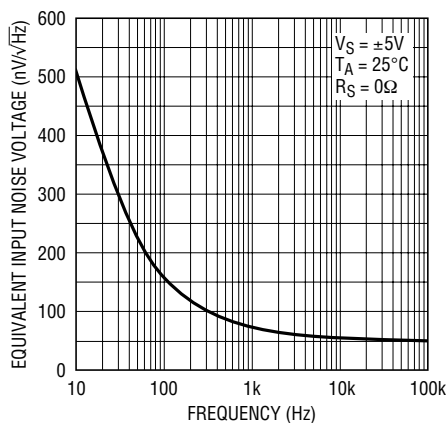


1195 G04

**Equivalent Input Noise Current vs Frequency**

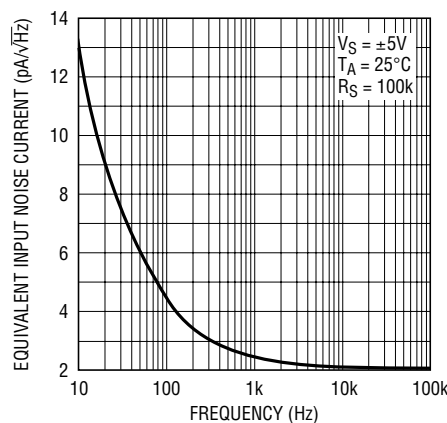


1195 G05

**Supply Current vs Supply Voltage**

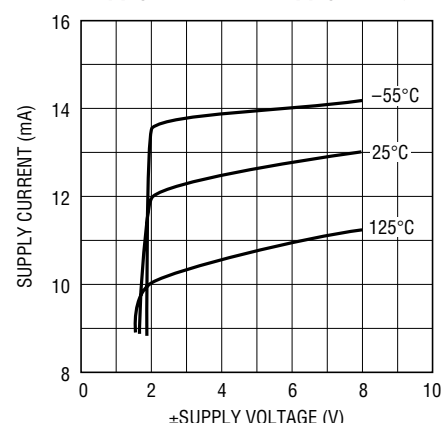


1195 G06

**Shutdown Supply Current vs Temperature**

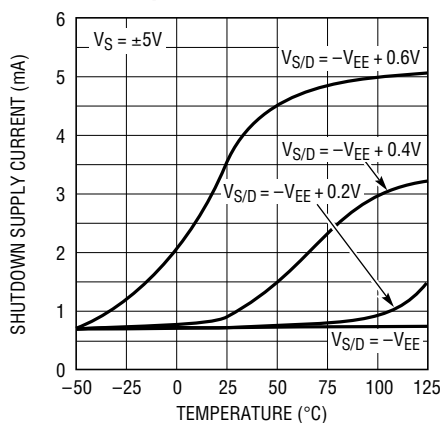


1195 G07

**Output Voltage Swing vs Load Resistance**

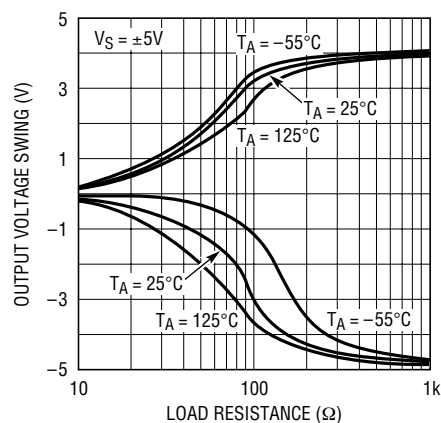

1195 G08


**Open-Loop Gain vs Temperature**

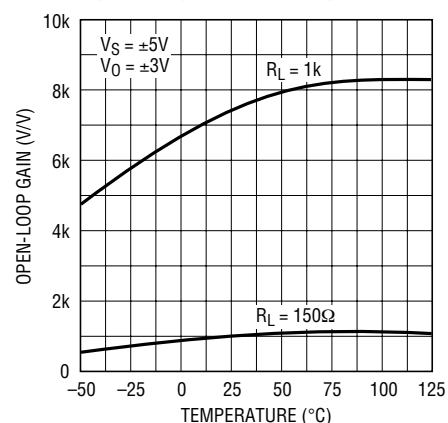

1195 G09


# TYPICAL PERFORMANCE CHARACTERISTICS

Gain and Phase vs Frequency

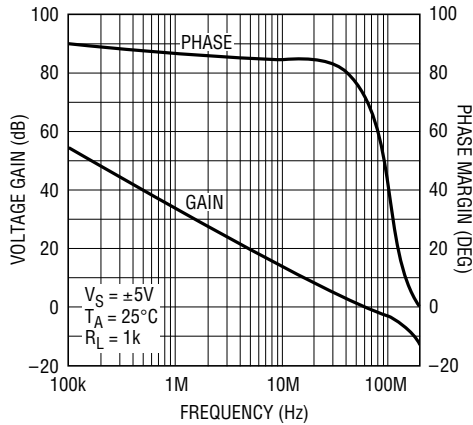


1195 G10

Open-Loop Voltage Gain vs Load Resistance

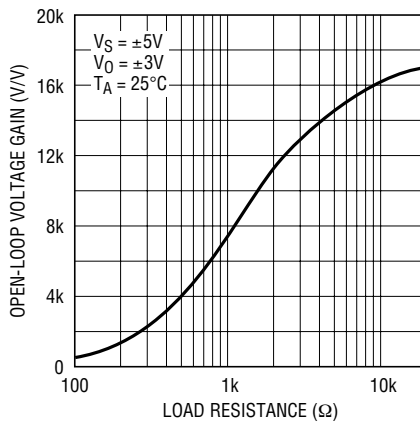


1195 G11

Gain-Bandwidth Product vs Supply Voltage

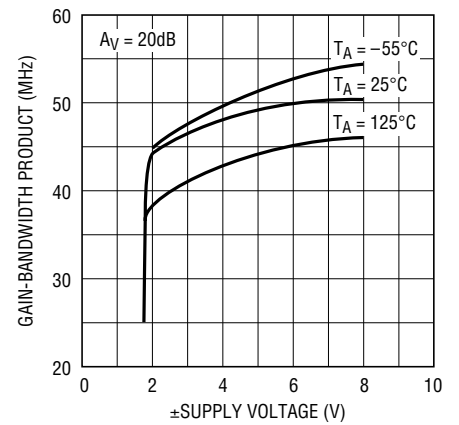


1195 G12

Unity-Gain Frequency and Phase Margin vs Temperature

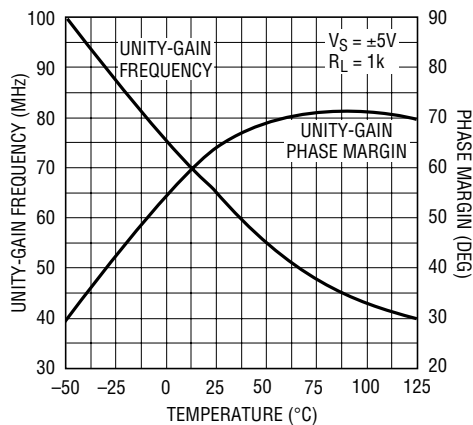


1195 G13

Output Impedance vs Frequency

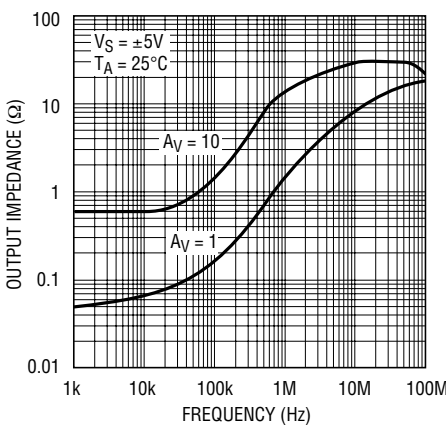


1195 G14

Common Mode Rejection Ratio vs Frequency

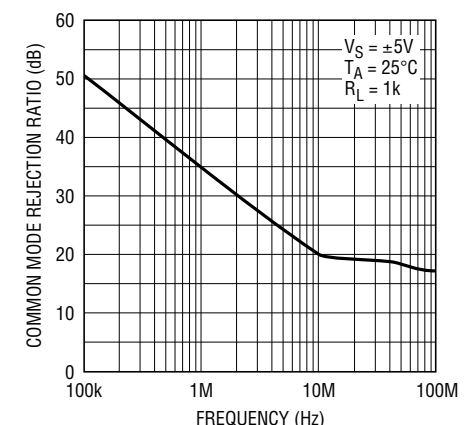


1195 G15

Power Supply Rejection Ratio vs Frequency

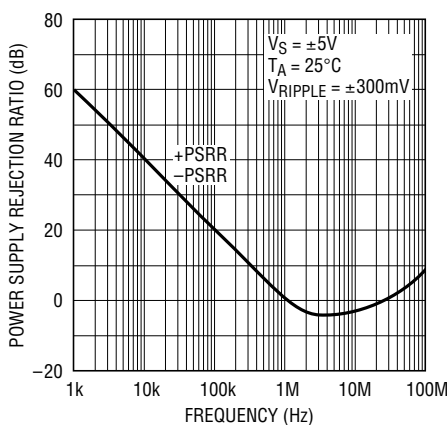


1195 G16

Output Short-Circuit Current vs Temperature

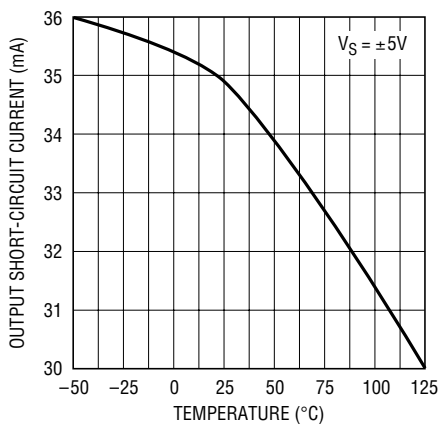

1195 G17

±Output Swing vs Supply Voltage

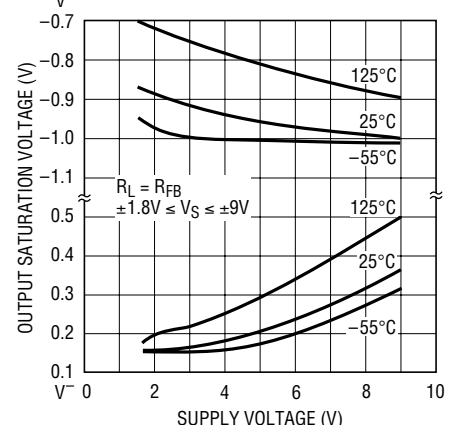


1195 G18

1195fa


# TYPICAL PERFORMANCE CHARACTERISTICS

Slew Rate vs Temperature

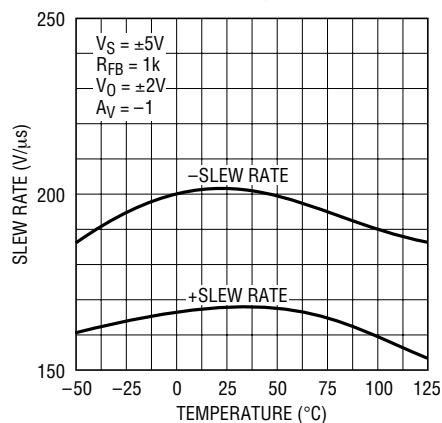


1195 G19

Output Voltage Step vs Settling Time,  $A_V = -1$

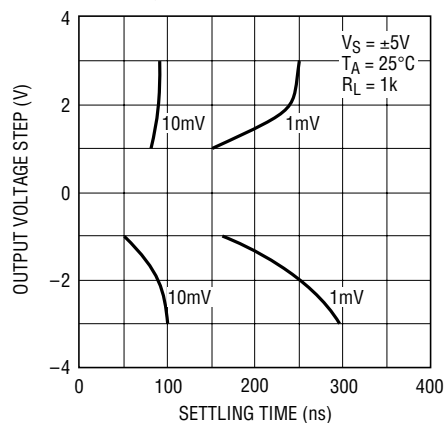


1195 G20

Output Voltage Step vs Settling Time,  $A_V = 1$

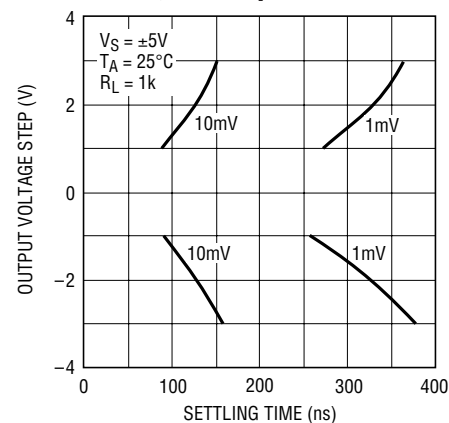

1195 G21


Large-Signal Transient Response

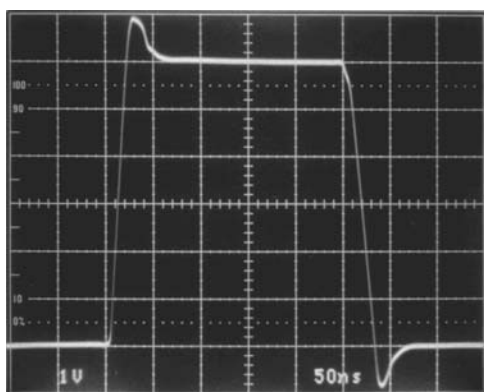

$A_V = 1, R_L = 1k$

1195 G22


Large-Signal Transient Response

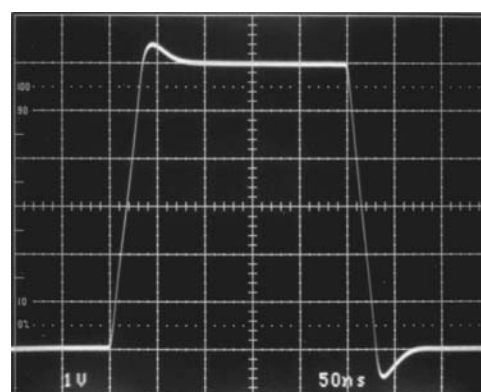

$A_V = -1, R_L = 1k$


1195 G23

Overload Recovery

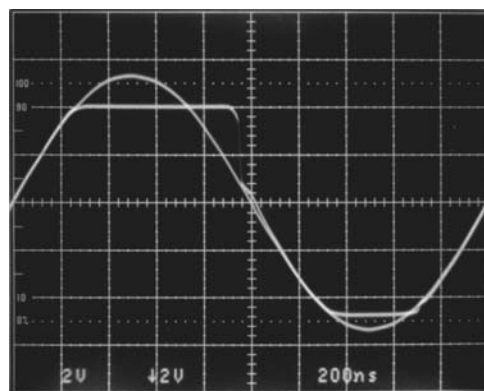

$A_V = 1, V_{IN} = 11V_{p-p}$

1195 G24



INPUT OFFSET VOLTAGE CAN BE ADJUSTED OVER A  $\pm 150mV$  RANGE WITH A 1k to 10k POTENTIOMETER.

1195 G25

## APPLICATIONS INFORMATION


### Power Supply Bypassing

The LT1195 is quite tolerant of power supply bypassing. In some applications a 0.1 $\mu$ F ceramic disc capacitor placed 0.5 inches from the amplifier is all that is required. In applications requiring good settling time, it is important to use multiple bypass capacitors. A 0.1 $\mu$ F ceramic disc in parallel with a 4.7 $\mu$ F tantalum is recommended.

### Cable Terminations


The LT1195 operational amplifier has been optimized as a low cost video cable driver. The  $\pm 20$ mA guaranteed output current enables the LT1195 to easily deliver 6V<sub>P-P</sub> into 150 $\Omega$ , while operating on  $\pm 5$ V supplies.

Double-Terminated Cable Driver

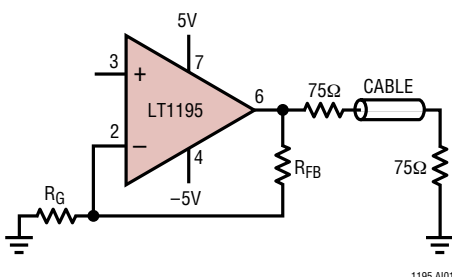

1195 AI01

Cable Driver Voltage Gain vs Frequency

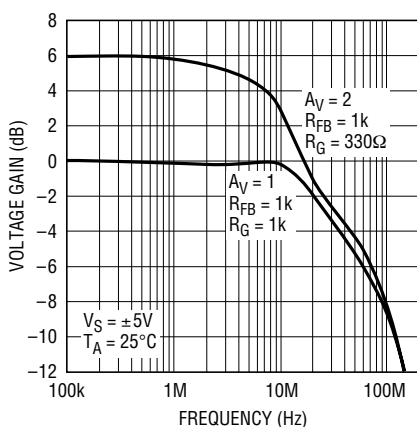

1195 AI02


When driving a cable it is important to terminate the cable to avoid unwanted reflections. This can be done in one of two ways: single termination or double termination. With single termination, the cable must be terminated at the

receiving end (75 $\Omega$  to ground) to absorb unwanted energy. The best performance can be obtained by double termination (75 $\Omega$  in series with the output of the amplifier, and 75 $\Omega$  to ground at the other end of the cable). This termination is preferred because reflected energy is absorbed at each end of the cable. When using the double termination technique it is important to note that the signal is attenuated by a factor of 2, or 6dB. This can be compensated for by taking a gain of 2, or 6dB in the amplifier.

### Using the Shutdown Feature

The LT1195 has a unique feature that allows the amplifier to be shut down for conserving power, or for multiplexing several amplifiers onto a common cable. The amplifier will shutdown by taking Pin 5 to  $V^-$ . In shutdown, the amplifier dissipates 15mW while maintaining a true high impedance output state of 15k in parallel with the feedback resistors. The amplifiers must be used in a noninverting configuration for MUX applications. In inverting configurations the input signal is fed to the output through the feedback components. The following scope photos show that with very high  $R_L$ , the output is truly high impedance; the output slowly decays toward ground. Additionally, when the output is loaded with as little as 1k the amplifier shuts off in 700ns. This shutoff can be under the control of HC CMOS operating between 0V and  $-5$ V.

Output Shutdown

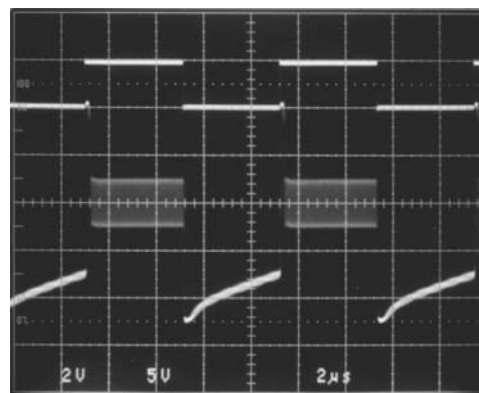


1MHz SINE WAVE GATED OFF WITH SHUTDOWN PIN  
 $A_V = 1$ ,  $R_L = \text{SCOPE PROBE}$

1195 AI03

## APPLICATIONS INFORMATION

Output Shutdown

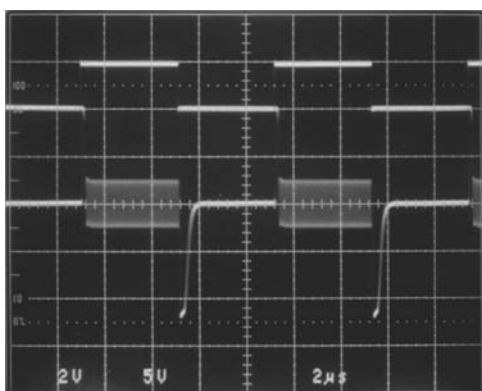


1MHz SINE WAVE GATED OFF WITH SHUTDOWN PIN

$A_V = 1$ ,  $R_L = 1k$

1195 AI04

Single 5V Video Amplifier

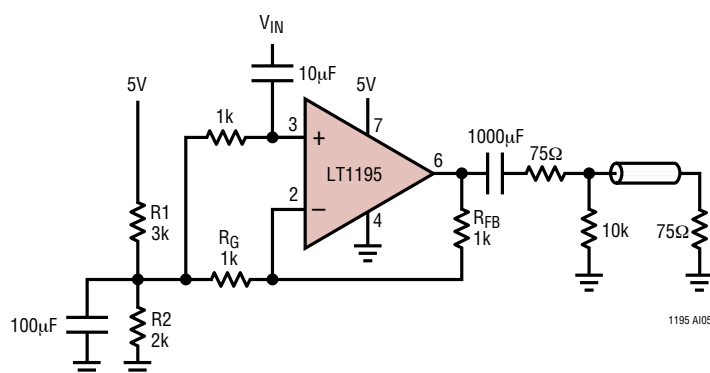

1195 AI05


### Detecting Pulses

The front page shows a circuit for detecting very fast pulses. In this open-loop design, the detector diode is D1 and a level shifting or compensating diode is D2. A load resistor  $R_L$  is connected to  $-5V$ , and an identical bias resistor  $R_B$  is used to bias the compensating diode. Equal value resistors ensure that the diode drops are equal. A very fast pulse will exceed the amplifier slew rate and cause a long overload recovery time. Some amount of  $dV/dt$  limiting on the input can help this overload condition, however too much will delay the response. Also shown is the response to a  $4V_{P-P}$  input that is 150ns wide. The maximum output slew rate in the photo is  $30V/\mu s$ . This rate is set by the 30mA current limit driving 1000pF.

### Operation on Single 5V Supply


The LT1195 has been optimized for a single 5V supply. This circuit amplifies standard composite video ( $1V_{P-P}$  including sync) by 2 and drives a double-terminated  $75\Omega$  cable. Resistors  $R_1$  and  $R_2$  bias the amplifier at 2V, allowing the sync pulses to stay within the common mode range of the amplifier. Large coupling capacitors are required to pass the low frequency sidebands of the composite signal. A multiburst response and vector plot standard color burst are shown.

Video Multiburst at Pin 6 of Amplifier

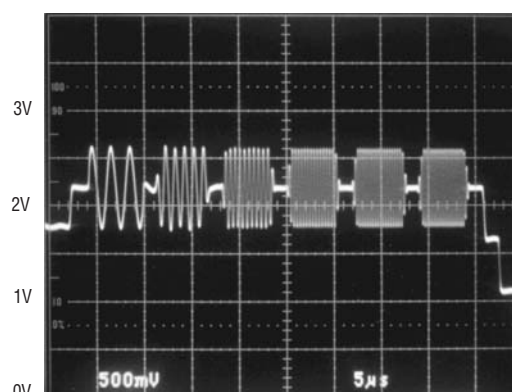

1195 AI06

Vector Plot of Standard Color Burst

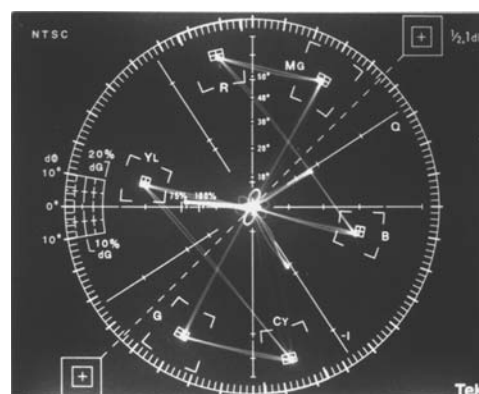


1195 AI07

## APPLICATIONS INFORMATION

### Send Color Video Over Twisted-Pair


With an LT1195 it is possible to send and receive color composite video signals more than 1000 feet on a low cost twisted-pair. A bidirectional "video bus" consists of the LT1195 op amp and the LT1187 video difference amplifier. A pair of LT1195s at TRANSMIT 1, is used to generate differential signals to drive the line which is back-terminated in its characteristic impedance. The LT1187 twisted-pair receiver, converts signals from differential to single-ended. Topology of the LT1187 provides for cable compensation at the amplifier's feedback node as shown. In this case, 1000 feet of twisted-pair is compensated with 1000pF and 50 $\Omega$  to boost the 3dB bandwidth of the system from 750kHz to 4MHz. This bandwidth is adequate to pass a 3.58MHz chrome subcarrier and the 4.5MHz sound subcarrier. Attenuation in the cable can be compensated by lowering the gain set resistor  $R_G$ . At TRANSMIT 2, another pair of LT1195s serve the dual function to provide cable termination via low output impedance and generate differential signals for TRANSMIT 2. Cable termination is made up of 15 $\Omega$  and 33 $\Omega$  attenuators to reduce the differential input signal to the LT1187. Maximum input signal for the LT1187 is 760mV<sub>P-P</sub>.

**1.5MHz Square Wave Input and Unequalized Response Through 1000 Feet of Twisted-Pair**

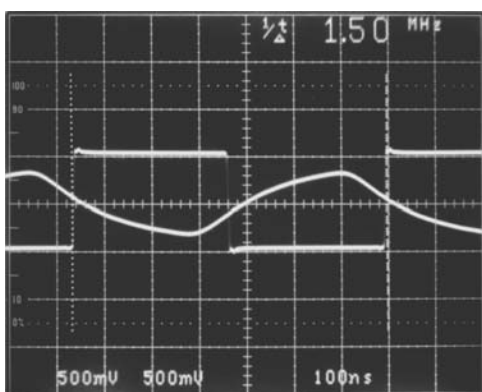


1195 A108

**1.5MHz Square Wave Input and Equalized Response Through 1000 Feet of Twisted-Pair**

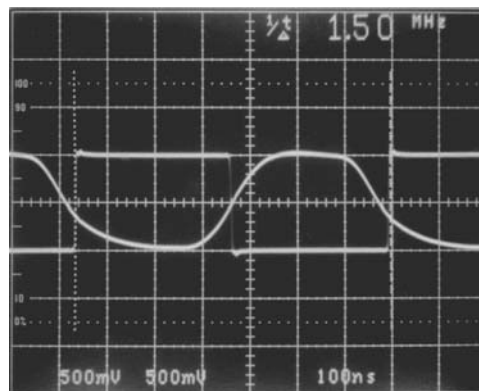


1195 A109

**Multiburst Pattern Passed Through 1000 Feet of Twisted-Pair**

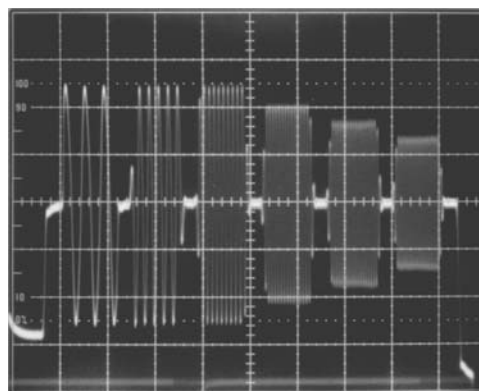

1195 A110

**Vector Plot of Standard Color Burst Through 1000 Feet of Twisted-Pair**

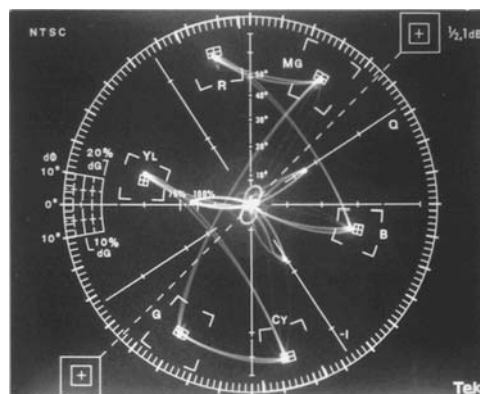

1195 A111


1195fa

The schematic diagram illustrates a full-duplex transceiver circuit. It is divided into four main functional blocks: TRANSMIT 1, TRANSMIT 2, RECEIVE 1, and RECEIVE 2. The central communication link is a 1000 FT TWISTED-PAIR cable.

- TRANSMIT 1:** Features two LT1195 comparators. The first comparator's non-inverting input (+) is connected to a 75Ω termination resistor and a 1kΩ feedback resistor. Its inverting input (-) is connected to a 1kΩ resistor from the output and a 33Ω resistor from the twisted-pair line. The output (pin 6) is connected to the twisted-pair line through a 33Ω resistor. The second comparator's non-inverting input (+) is grounded, and its inverting input (-) is connected to the output of the first comparator through a 1kΩ resistor. Its output (pin 6) is connected to the twisted-pair line through a 15Ω resistor.
- TRANSMIT 2:** Symmetrical to TRANSMIT 1, with the twisted-pair line connected to the 33Ω resistor of the first comparator and the 15Ω resistor of the second comparator.
- RECEIVE 1:** Utilizes an LT1187 comparator. Its non-inverting input (+) is connected to the twisted-pair line through a 15Ω resistor. The inverting input (-) is connected to a 300Ω feedback resistor (R<sub>FB</sub>) and a 300Ω resistor (R<sub>G</sub>) to ground. A 1000pF capacitor is connected between the inverting input and ground. The output (pin 6) is connected to a 75Ω termination resistor.
- RECEIVE 2:** Symmetrical to RECEIVE 1, with the twisted-pair line connected to the 15Ω resistor of the LT1187 comparator.

Component values are specified as 75Ω, 1k, 33Ω, 15Ω, 300Ω, 1000pF, and 50Ω. The LT1195 and LT1187 comparators are shown in a standard triangular symbol with pins 1, 2, 3, 5, and 6 labeled.


## SIMPLIFIED SCHEMATIC

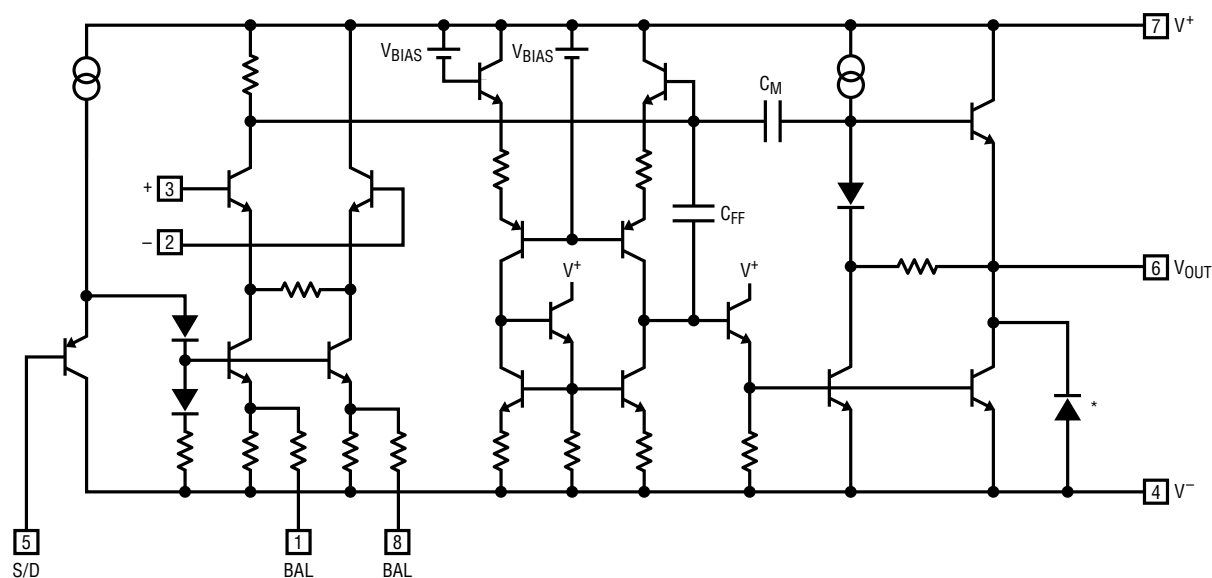

1195 SS


## PACKAGE DESCRIPTION

### J8 Package 8-Lead CERP (Narrow .300 Inch, Hermetic) (Reference LTC DWG # 05-08-1110)

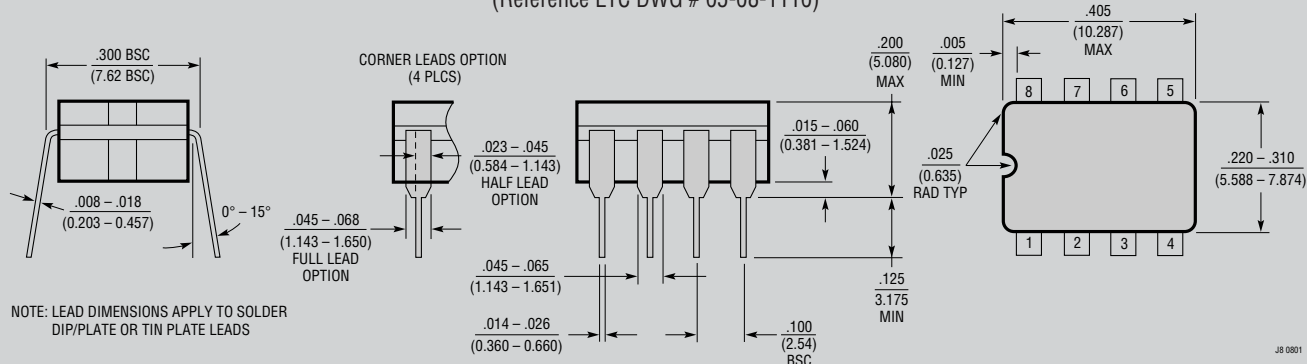

**OBSOLETE PACKAGE**


### N8 Package 8-Lead PDIP (Narrow .300 Inch) (Reference LTC DWG # 05-08-1510)

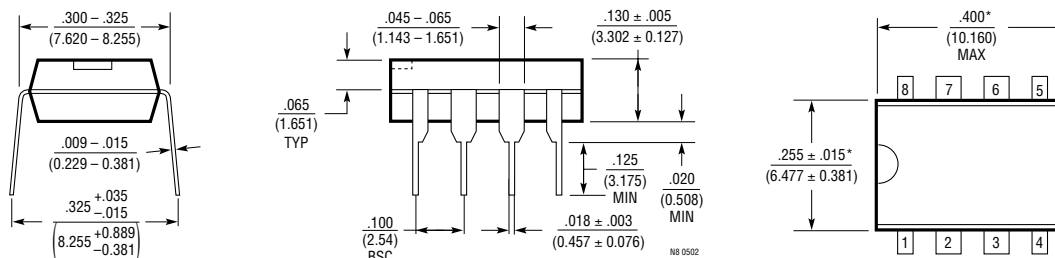

NOTE:  
1. DIMENSIONS ARE IN INCHES  
MILLIMETERS

\*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.  
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH (0.254mm)

### S8 Package 8-Lead Plastic Small Outline (Narrow .150 Inch) (Reference LTC DWG # 05-08-1610)

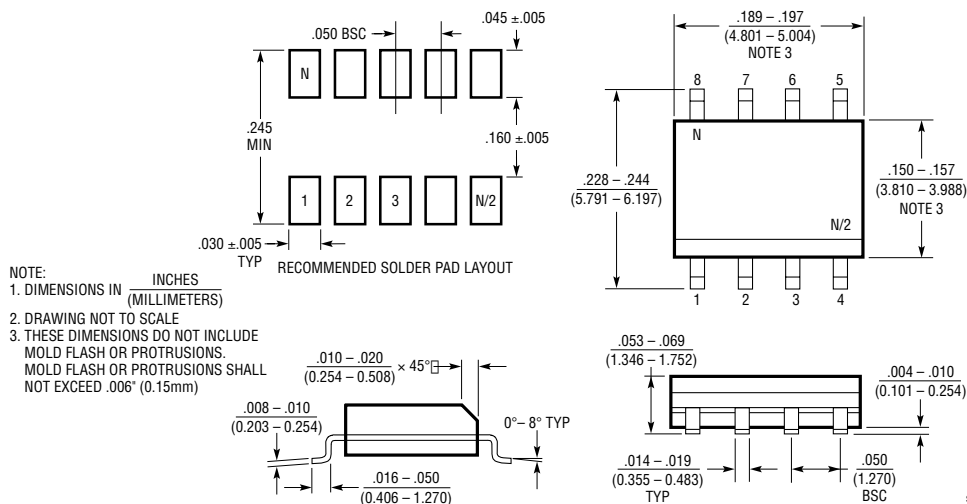

1195fa