

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	20
© COPYRIGHT 20 BY -	ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	OWN	APVD
CE	00	A2		REVISED PER ECO-11-005140	23MAR2011	RK	HMR


△ MATERIAL:

CONNECTOR ASSEMBLY:
 REAR BODY: GLASS FILLED POLYESTER, PBT
 PLUNGER: ALUMINUM ALLOY
 FERRULE: MINERAL FILLED PAS*
 COUPLING NUT: NICKEL PLATED ZINC
 INTERNAL COMPONENTS: RUBBER, COLOR: BLACK
 SPRING: STAINLESS STEEL
 PROTECTIVE COVER: LDPE, COVER: BLACK, NON-FR
 STEPPED CRIMP EYELET: NICKEL PLATED COPPER
 POLYMER TUBING: TYGON, COLOR: CLEAR
 HYTREL, COLOR: WHITE
 PVC, COLOR: BLACK
 STRAIN RELIEF: POLYOLEFIN ELASTOMER, COLOR: BLACK, NON-FR
 BARE BUFFER BOOT: POLYOLEFIN ELASTOMER, COLOR: BLACK*
 *UL94 V-0 RATED AT QUALIFYING THICKNESS.

2. INSTRUCTION SHEET: 408-9860 AVAILABLE FOR DOWNLOAD AT
www.tycoelectronics.com/documents OR www.ampnetconnect.com/foguide.

3. THIS KIT WILL TERMINATE:
 900um TIGHT BUFFERED FIBER
 250um COATED FIBER
 2.0-3.0mm JACKETED CABLE

△ BULK PACKAGE.

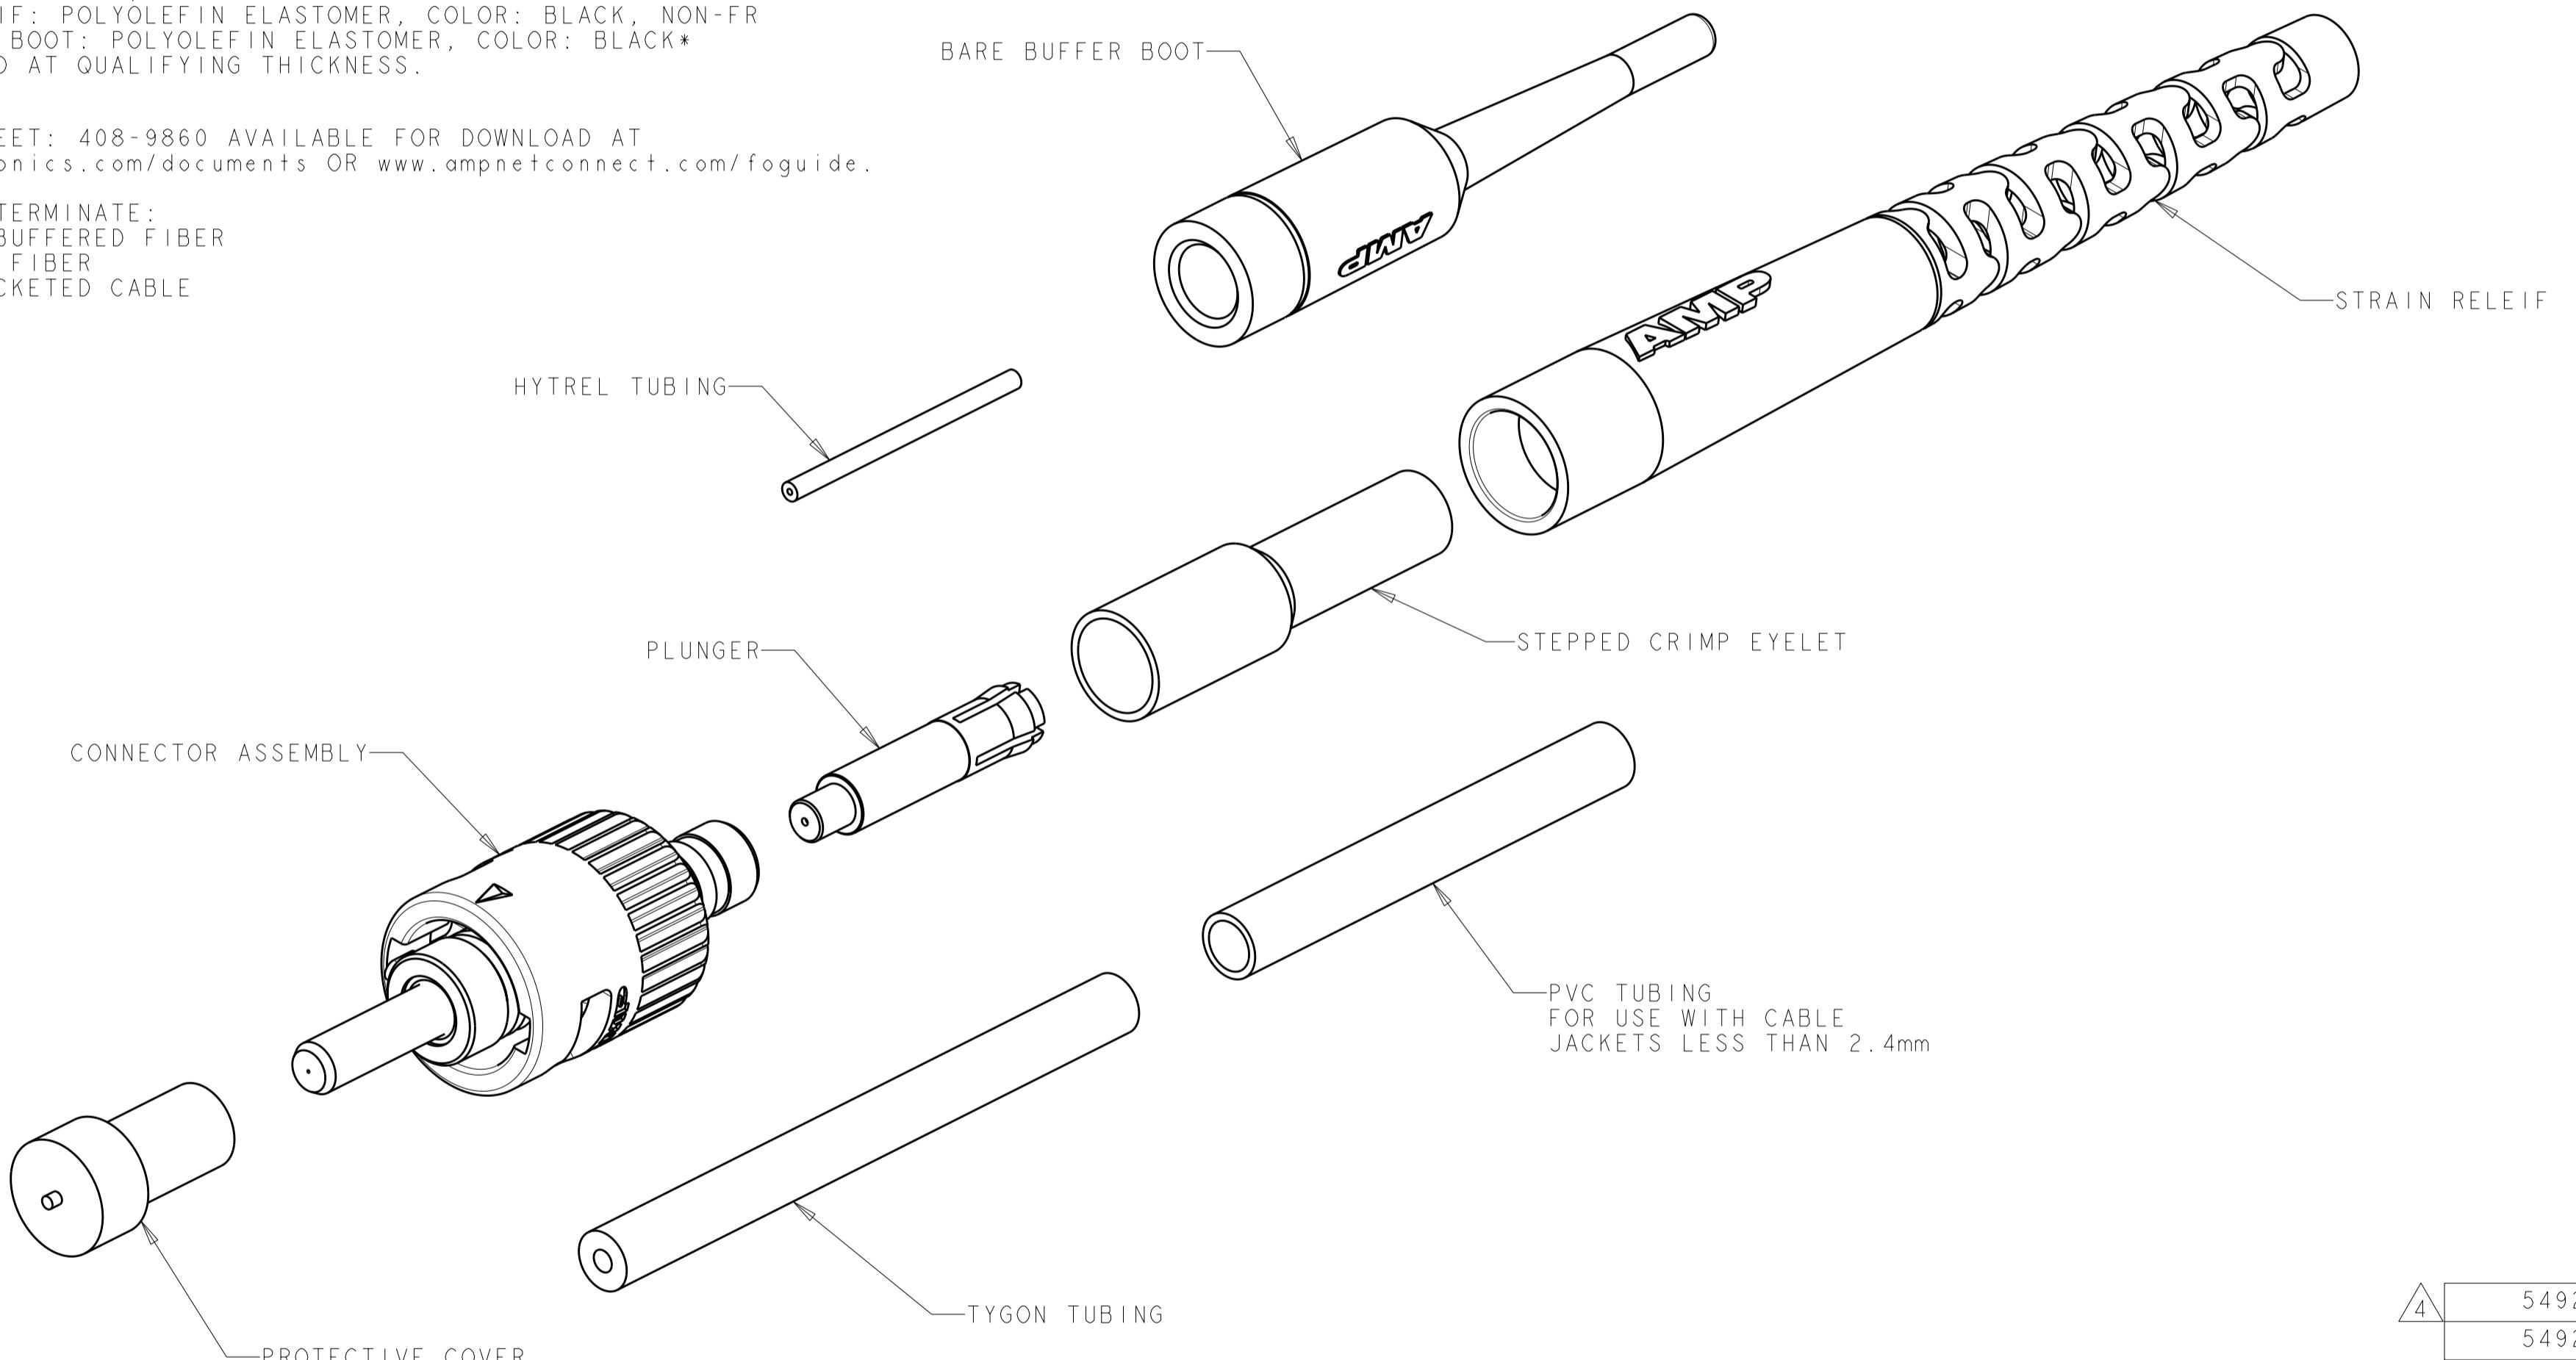

△ 5492168-2
 5492168-1
 PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN B_BRIGGS 02DEC2005	TE Connectivity
DIMENSIONS:	CHK L_SAURWEIN 02DEC2005	
mm	APVD S_BUCHTER 02DEC2005	
0 PLC ± 1 PLC ±0.1 2 PLC ±0.02 3 PLC ±0.005 4 PLC ±0.0005 ANGLES ±-	PRODUCT SPEC -	
MATERIAL △	APPLICATION SPEC -	
FINISH -	SIZE CAGE CODE DRAWING NO	RESTRICTED TO
-	A200779 C=5492168	
-	CUSTOMER DRAWING	
SCALE 4:1	SHEET 1 OF 1	REV A2