
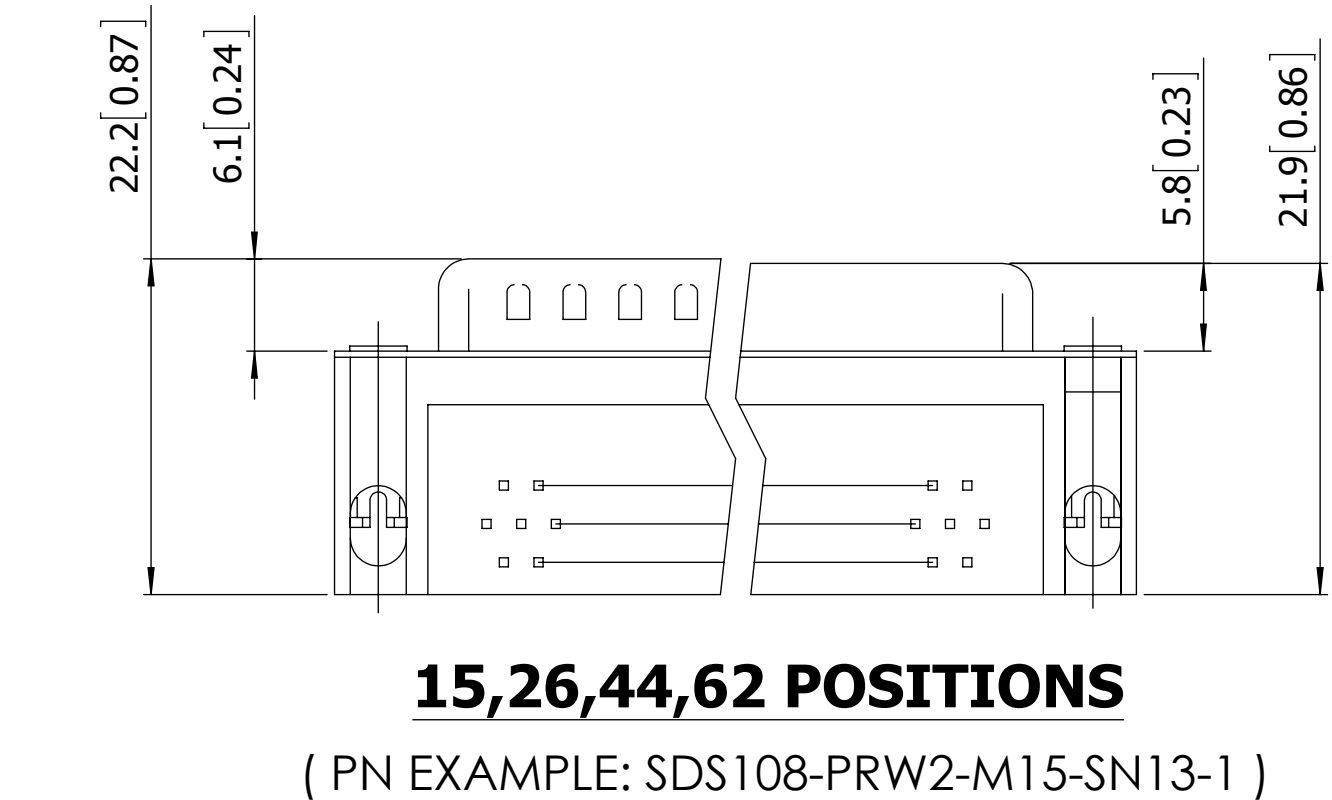



DIMENSIONS

POSITIONS	A		B		C		D		E		F		G	
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH
15	30.81	1.213	24.99	0.984	16.92	0.666	16.33	0.643	2.29	0.090	7.04	0.277	1.145	0.0451
26	39.20	1.543	33.30	1.311	25.25	0.994	24.70	0.972	2.29	0.090	6.88	0.271	1.145	0.0451
44	53.05	2.088	47.04	1.852	38.96	1.534	38.40	1.512	2.29	0.090	6.88	0.271	1.145	0.0451
62	69.40	2.732	63.50	2.500	55.42	2.182	54.80	2.158	2.41	0.095	7.00	0.276	1.205	0.0474


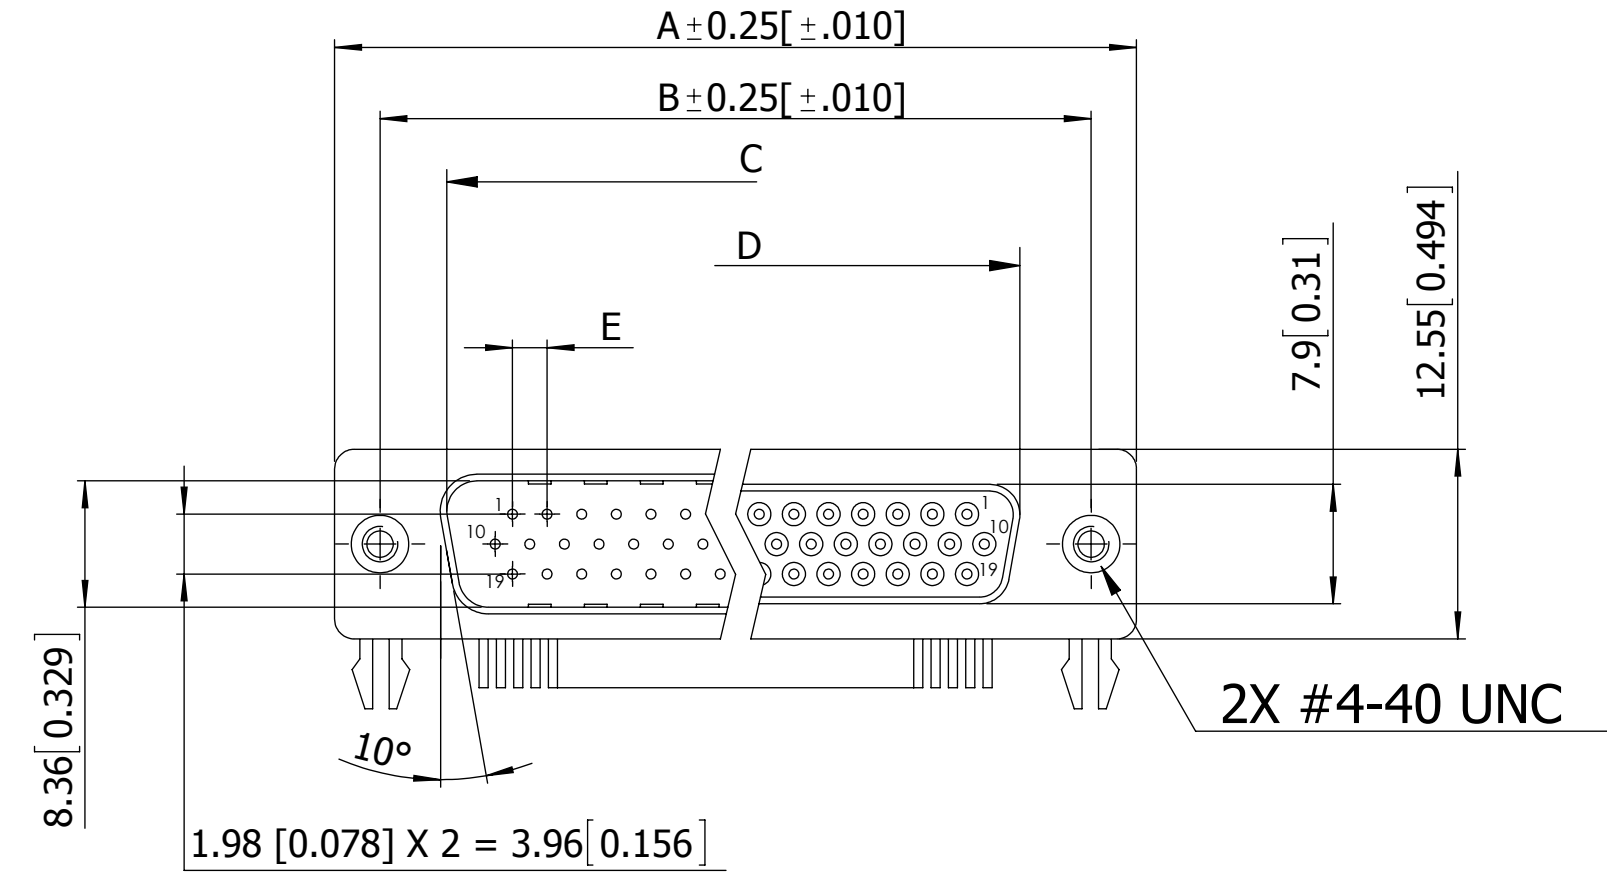


NOTES:
MATERIAL
INSULATOR : GLASS-FILLED THERMOPLASTIC PBT, UL94V-0
CONTACT: BRASS
SHELL : SPCC, .000100" TIN OVER .000050" MIN. COPPER (STANDARD, SEE PAGE 4)
CLINCH NUT : BRASS, NICKEL PLATED
BOARDLOCK : BRASS, TIN PLATED
SCREWLOCK : STEEL, NICKEL PLATED
OPERATING TEMPERATURE : -55°C TO +105°C


ELECTRICAL
CONTACT RESISTANCE : 20 MILLIOHMS MAX AT 1 AMP DC
INSULATION RESISTANCE : 1000 MAGOHMS AT 500 VDC
DIELECTRIC WITHSTANDING VOLTAGE : 1000 VAC/RMS 60Hz FOR 1 MINUTE
CURRENT RATING : 3 AMPS
VOLATGE RATING : 250 VAC/RMS 60Hz

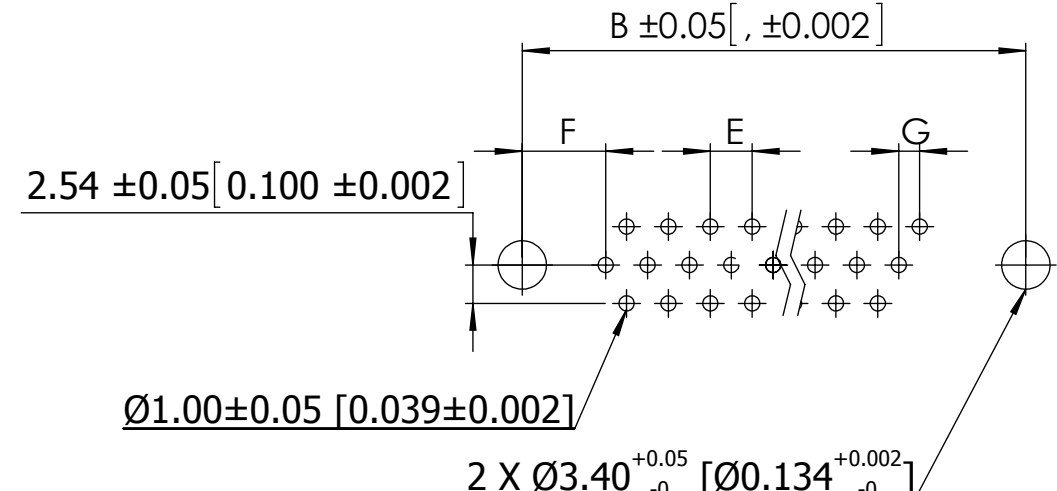


RECOMMENDED PCB LAYOUT
26,44,62 POSITIONS MALE

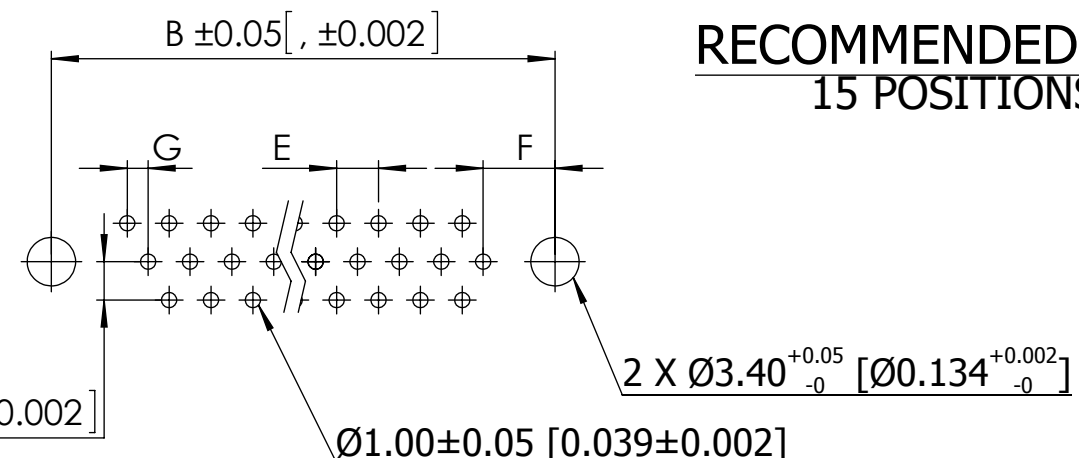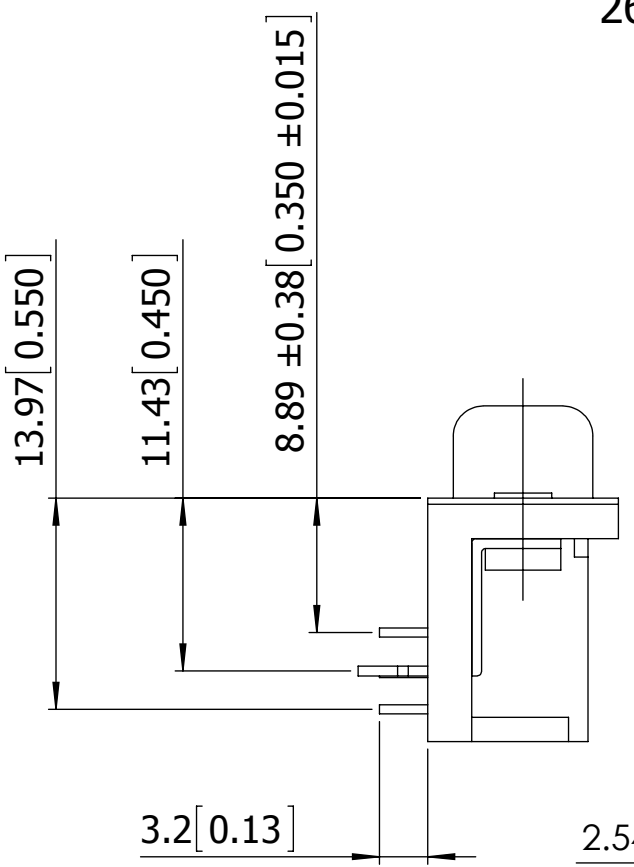

RECOMMENDED PCB LAYOUT
26,44,62 POSITIONS FEMALE

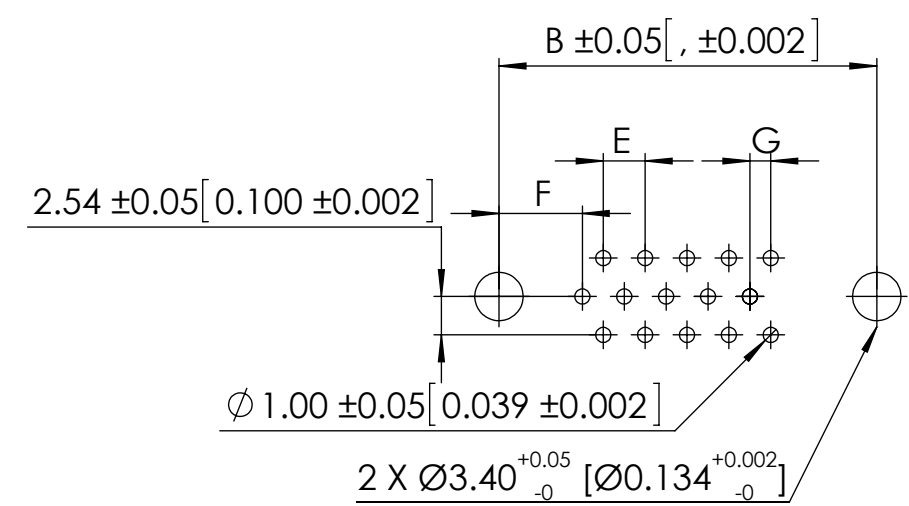

RECOMMENDED PCB LAYOUT
15 POSITIONS MALE

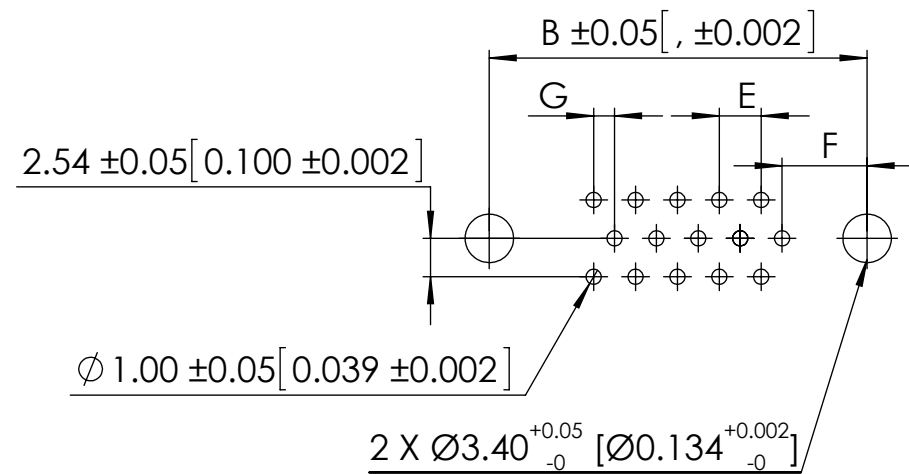





RECOMMENDED PCB LAYOUT
15 POSITIONS FEMALE

REVISIONS				
REV.	ECO. NO	DESCRIPTION	DATE	BY
C	2616	REMOVE 'B' & 'N' PLATING	06/14/2012	LH
D	2772	ADD 15 POSITIONS PCB LAYOUT AND UPDATE PCB LAYOUT BOARD-LOCK HOLE 3.40mm(WAS 3.05mm) & UPDATE DIMENSION TABLE "F" 26 & 44 POSITIONS 6.88mm(WAS 7.04mm)	07/12/2013	LH

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM [INCHES]		DRAWN	DATE	NAME		
			07/01/2011	LH		
TOLERANCES: ANGULAR: ± 3° DECIMALS X.=± 0.38 [.015] X.=± 0.25 [.010] .XX=± 0.13 [.005]		THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.			TITLE 108 SERIES D-SUB H.D. RIGHT ANGLE TYPE	
					PART NUMBER SDS108-PR _ _ - _ -SN _ _ -1	
		SIZE	CAGE CODE	DWG. NO.	REV	
		C	54453	11779	D	
		SCALE: 1:8		SHEET 1 OF 4		

F
E
D
C
B
A


8 7 6 5 4 3 2 1

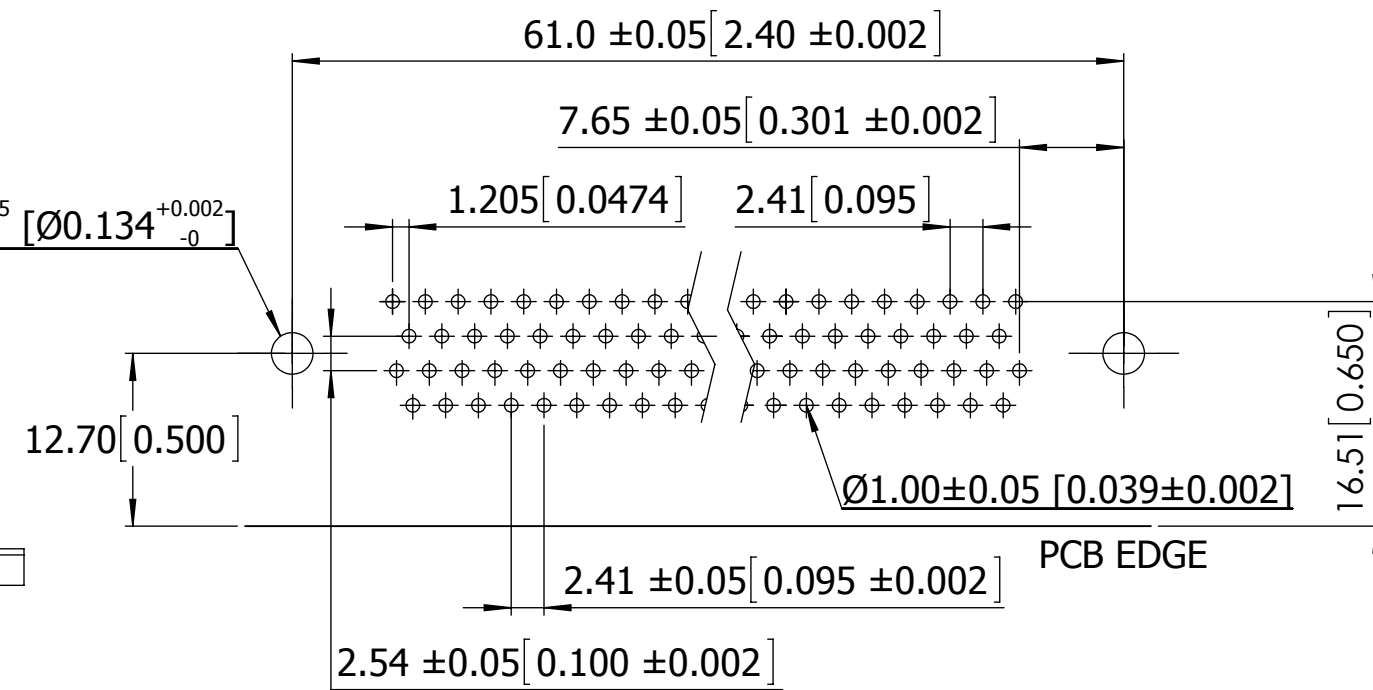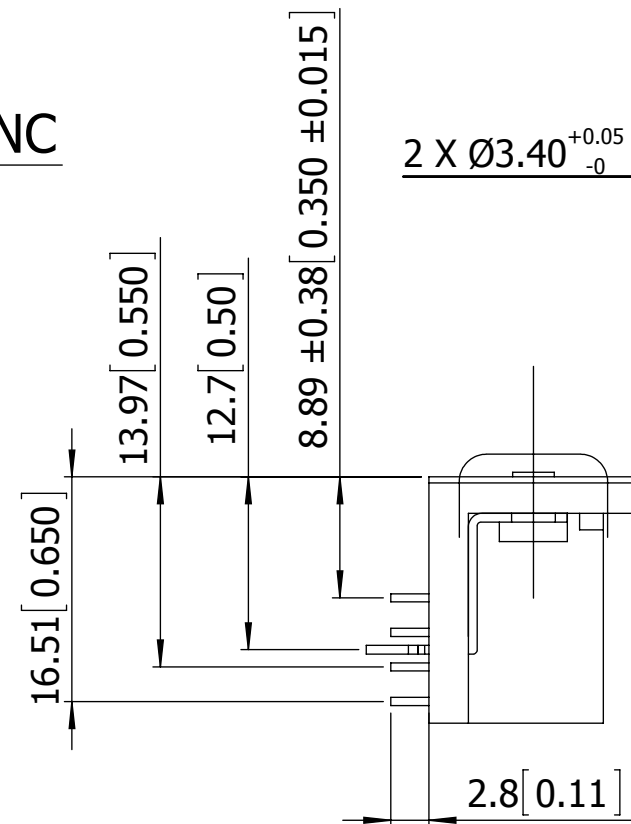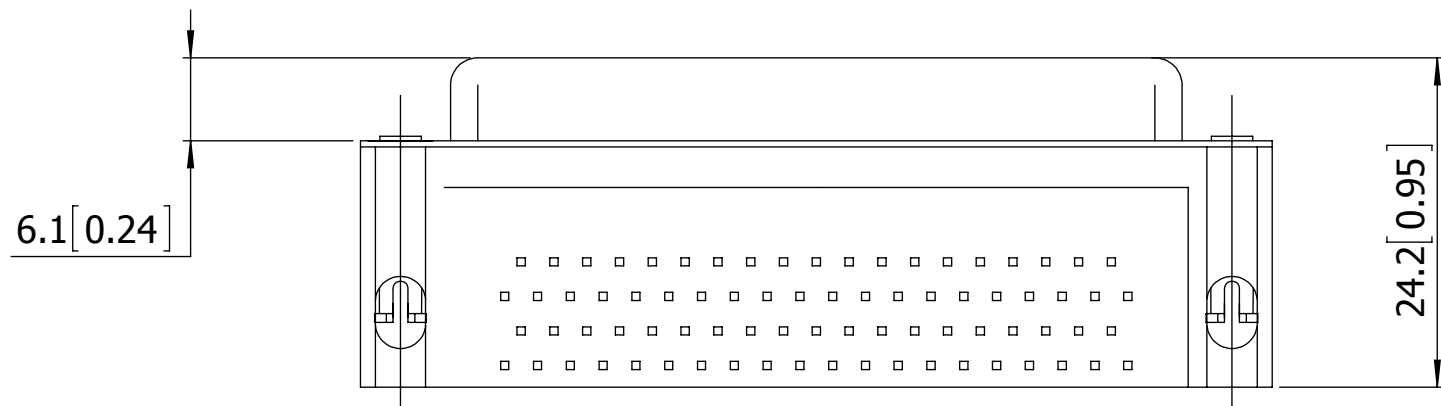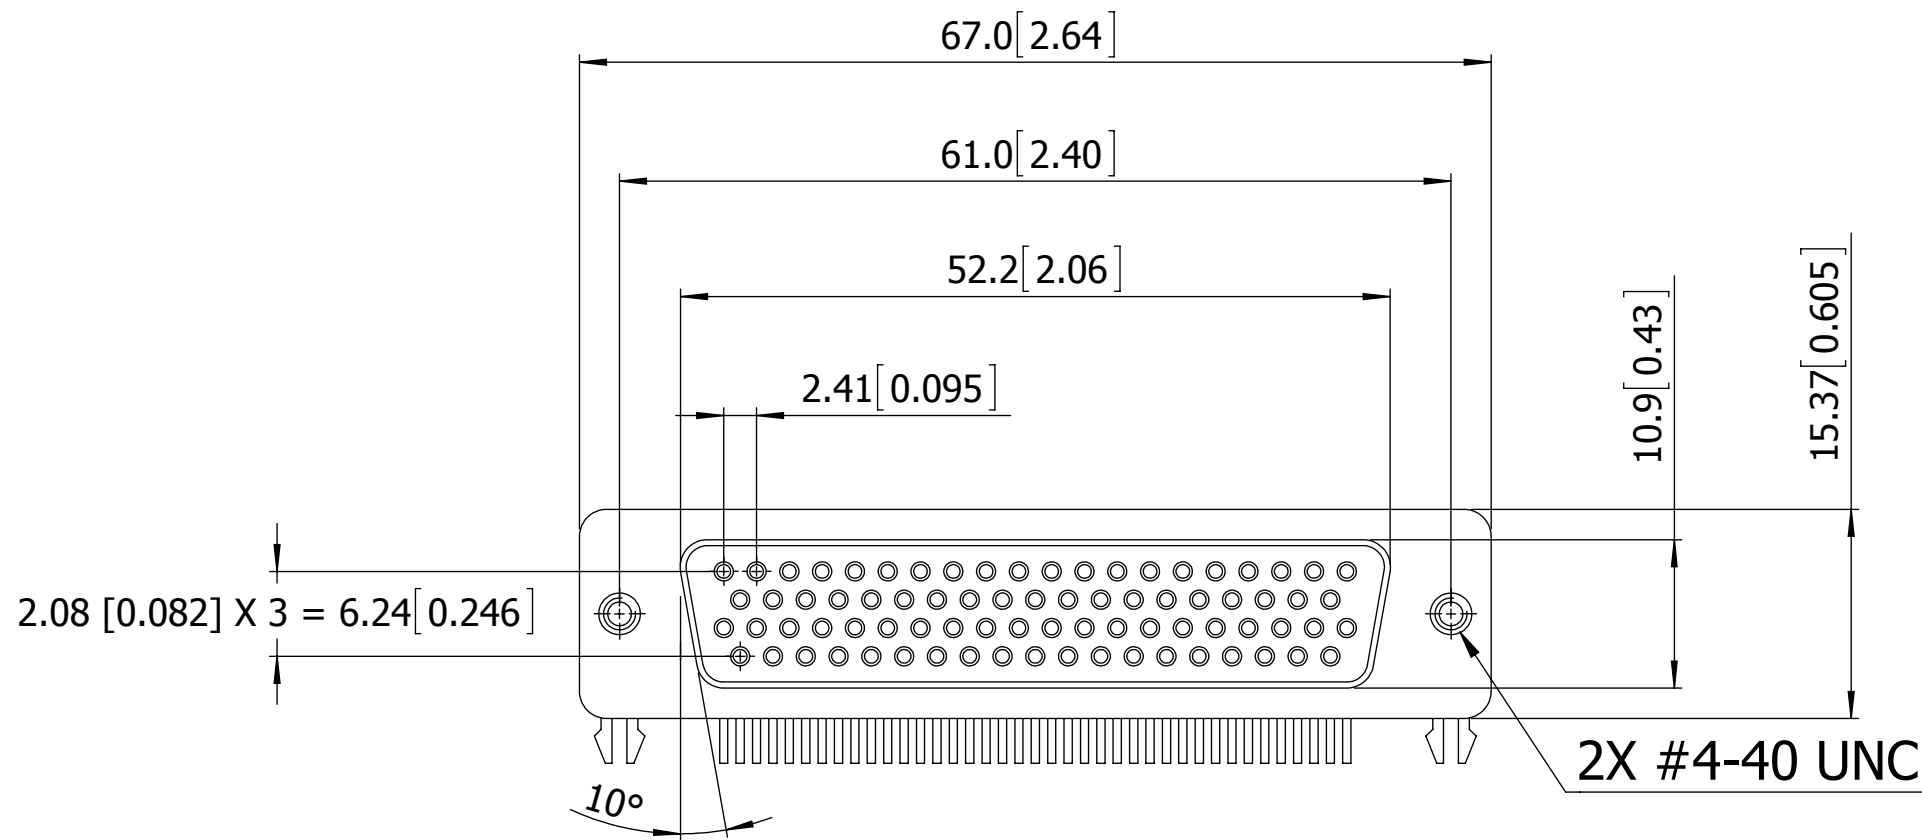


RECOMMENDED PCB LAYOUT
78 POSITIONS MALE / FEMALE


78 POSITIONS

(PN EXAMPLE: SDS108-PRW2-M78-SN13-1)



RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM [INCHES]	DRAWN	DATE	NAME	
		07/01/2011	LH	
TOLERANCES:	THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.			TITLE
ANGULAR: ± 3°				108 SERIES D-SUB H.D. RIGHT ANGLE TYPE
DECIMALS X.= ± 0.38 [.015] .X= ± 0.25 [.010] .XX= ± 0.13 [.005]				PART NUMBER SDS108-PR_ _ - _ _ -SN_ _ -1
 	SIZE	CAGE CODE	DWG. NO.	REV
	C	54453	11779	D
SCALE: 1:8			SHEET 2 OF 4	

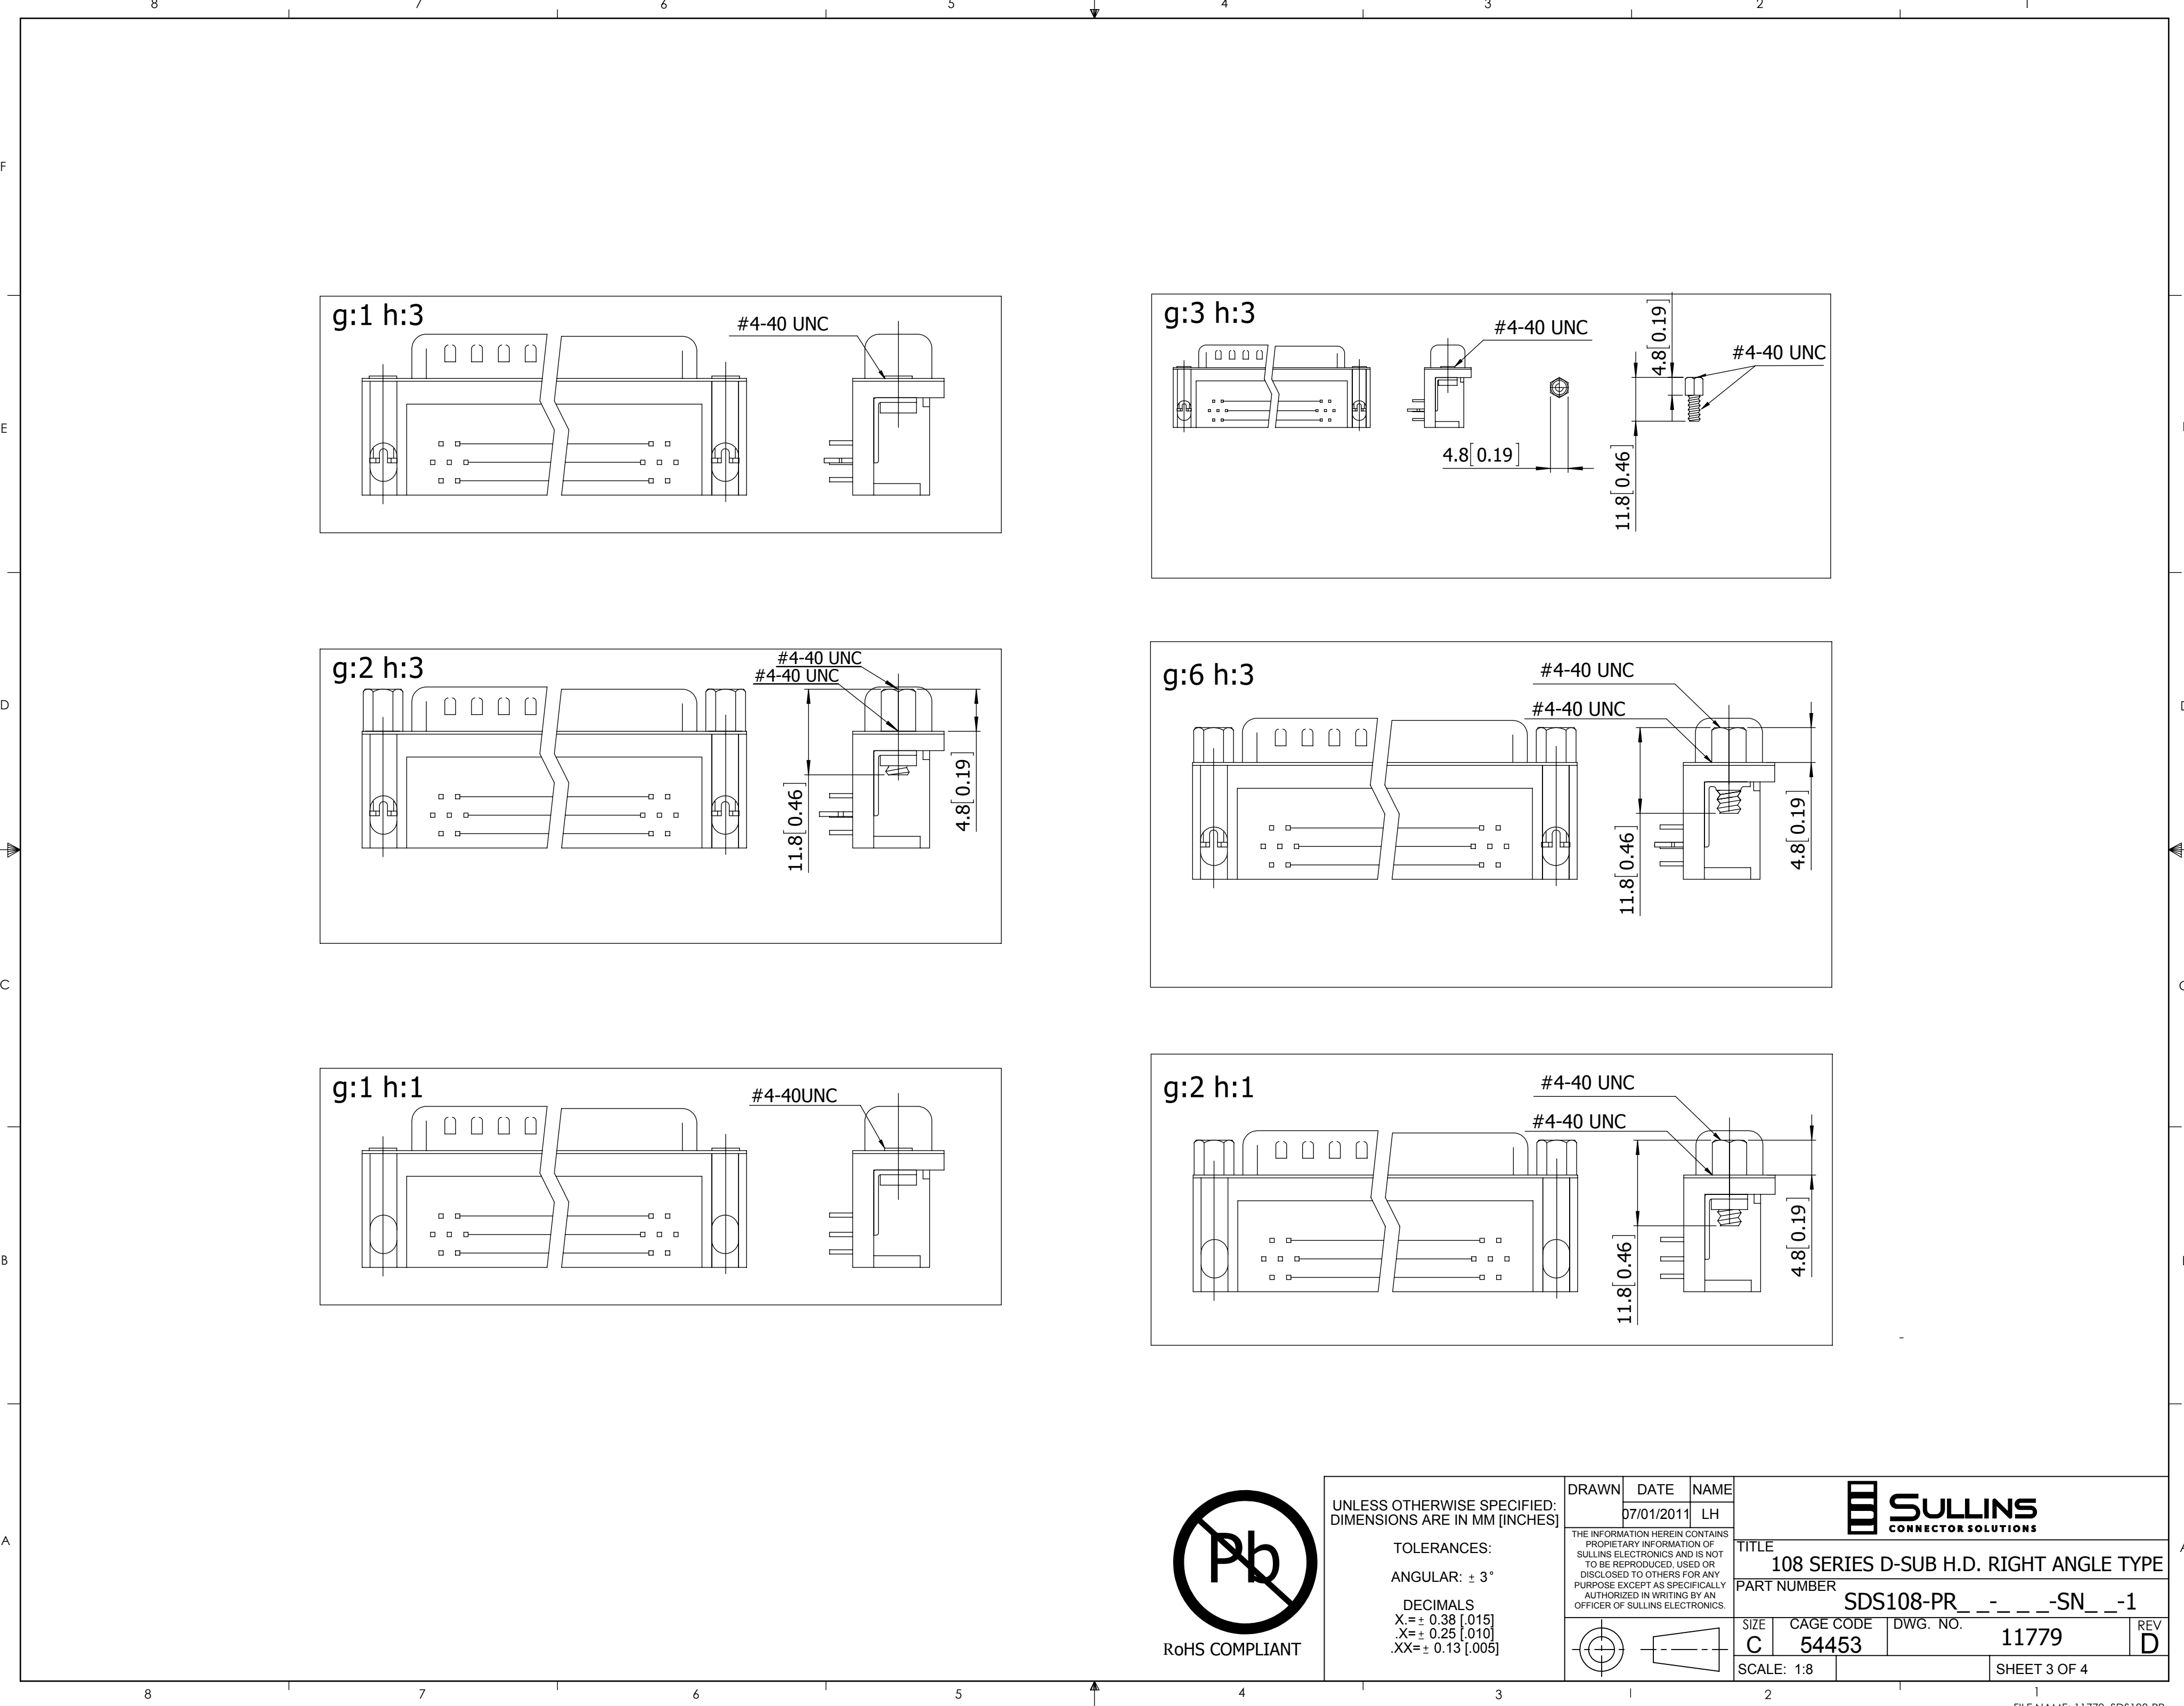

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM [INCHES]		DRAWN	DATE	NAME		
			07/01/2011	LH		
TOLERANCES: ANGULAR: $\pm 3^\circ$ DECIMALS X = ± 0.38 [.015] X = ± 0.25 [.010] .XX = ± 0.13 [.005]		THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.			TITLE 108 SERIES D-SUB H.D. RIGHT ANGLE TYPE	
					PART NUMBER SDS108-PR _ _ - _ -SN _ _ -1	
		SIZE	CAGE CODE	DWG. NO.	REV	
		C	54453	11779	D	
SCALE: 1:8		SHEET 3 OF 4				

SDS108-PR__-__-SN__-1

a b c d e f g h i

a. CONTACT PLATING
(ALL PLATINGS HAVE .000050" NICKEL UNDERPLATE)
W = GOLD FLASH ON CONTACT SURFACE,
.000100" PURE TIN ON TERMINATION.
U = .000015" GOLD ON CONTACT SURFACE,
.000100" PURE TIN ON TERMINATION.
C = .000030" GOLD ON CONTACT SURFACE,
.000100" PURE TIN ON TERMINATION.
P = GOLD FLASH OVERALL.

b. SHELL PLATING
1 = NICKEL
2 = TIN (STANDARD)

c. CONTACT TYPE
M = MALE
F = FEMALE

d. NO. OF CONTACTS
15 = 15 POSITIONS
26 = 26 POSITIONS
44 = 44 POSITIONS
62 = 62 POSITIONS
78 = 78 POSITIONS

e. PIN TYPE
S = STAMPED PIN

f. FERRITE
N = WITHOUT FERRITE

g. FLANGE MOUNTING OPTION
0 = Ø3.05mm [Ø0.120] CLEARANCE HOLE (COMBINE WITH ITEM h: 0 ONLY)
1 = #4-40 FEMALE THREAD (COMBINE WITH h:1 OR h:3)
2 = #4-40 UNC (4.8 X 11.8mm [0.19 X 0.46]) FEMALE SCREWLOCK INSTALLED (COMBINE WITH h:1 OR h:3)
3 = #4-40 UNC (4.8 X 11.8mm [0.19 X 0.46]) FEMALE SCREWLOCK BULK-PACKED (COMBINE WITH h:1 OR h:3)
** 6 = #4-40 UNC (4.8 X 11.8mm [0.19 X 0.46]) FEMALE SCREWLOCK INSTALLED (COMBINE WITH h:3 ONLY)

** REMOVE SCREWLOCK TO DISASSEMBLE BOARDLOCK BRACKET

h. RIVET OPTIONS
0 = NONE
1 = GROUNDING STRAP ON PANEL
3 = GROUNDING HOOK BOARDLOCK+2 PRONG

i. INSULATOR COLOR
1 = BLACK (STANDARD)



UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM [INCHES]		DRAWN	DATE	NAME		
			07/01/2011	LH		
TOLERANCES: ANGULAR: ± 3° DECIMALS X.=± 0.38 [.015] X.=± 0.25 [.010] .XX=± 0.13 [.005]		THE INFORMATION HEREIN CONTAINS PROPRIETARY INFORMATION OF SULLINS ELECTRONICS AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY AN OFFICER OF SULLINS ELECTRONICS.			TITLE 108 SERIES D-SUB H.D. RIGHT ANGLE TYPE	
					PART NUMBER SDS108-PR__-__-SN__-1	
		SIZE	CAGE CODE	DWG. NO.	REV	
		C	54453	11779	D	
		SCALE: 1:8		SHEET 4 OF 4		