

F

E

D

C

B

A

F

E

D

C

B

A

注記
NOTES

△全極数が偶数の場合のみ適用。
TO BE APPLIED ONLY WHEN ALLCKTS ARE EVEN.

2.材質




MATERIAL

ウエハー : 66ナイロン, UL 94V-2

WAFER : 66NYLON, UL-94V-2

ピン : 黄銅, 銅下地錫メッキ (□1.14X17.45)

PIN : BRASS, TIN OVER COPPER PLATING
(□1.14X17.45)

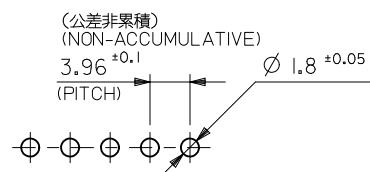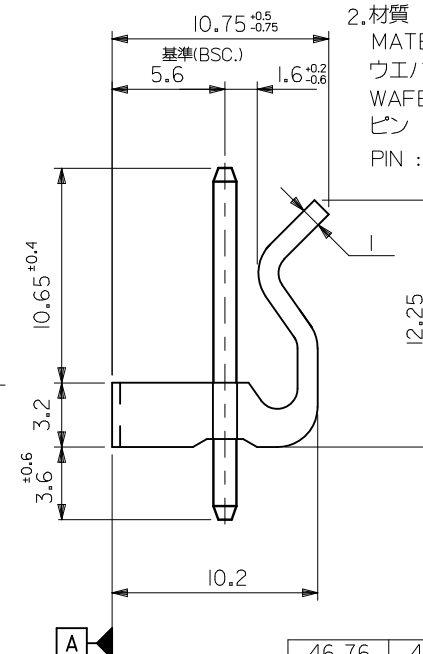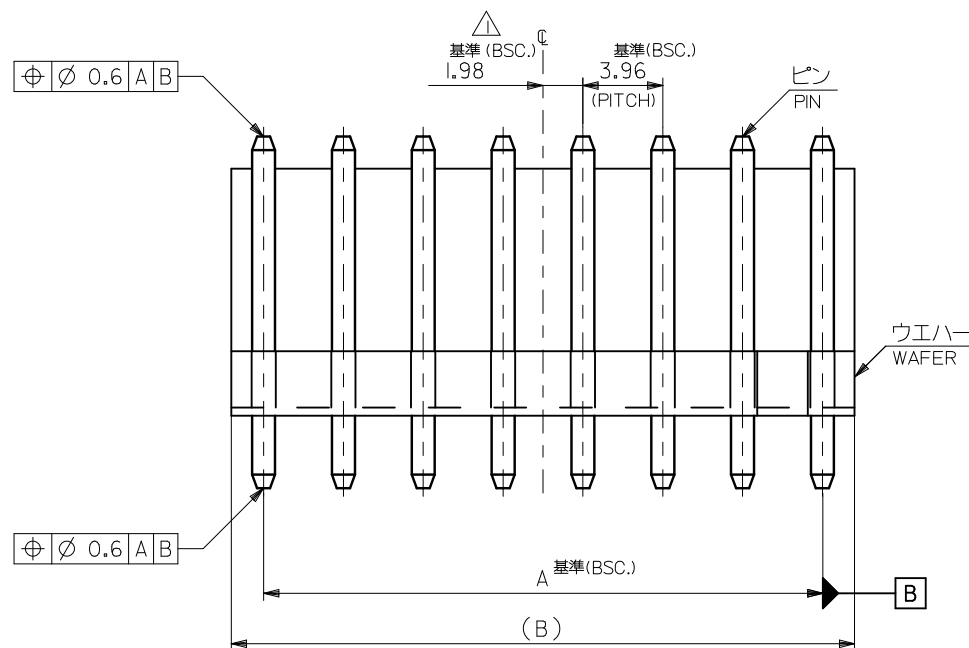

基板取付穴推奨寸法
RECOMMENDED P.C.BOARD HOLE DIM.

46.76	43.56	09-65-2128	5273-12A	12
42.8	39.6	-2118	-11A	11
38.84	35.64	-2108	-10A	10
34.88	31.68	-2098	-09A	9
30.92	27.72	-2088	-08A	8
26.96	23.76	-2078	-07A	7
23	19.8	-2068	-06A	6
19.04	15.84	-2058	-05A	5
15.08	11.88	-2048	-04A	4
11.12	7.92	-2038	-03A	3
7.16	3.96	09-65-2028	5273-02A	2
B	A	オーダー番号 (EDP NO.) ORDER NO. (EDP NO.)	ENG. NO.	極数 CKTS

REVISED EC NO: J2009-2884 DRAWN: YSHIBATA 2009/06/23 CHKD: THARUYAMA 2010/03/15 APPR: NUKITA 2010/03/15 REV D	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		10 UNDER	± 0.2	DRAWN BY S. MOCHIZUKI	DATE 1989/05/12	TITLE KK 3.96 WAFER ASSY WITH LOCK			
		10 OVER 30 UNDER	± 0.25	CHECKED BY H. H.	DATE 1991/04/10				
		30 OVER	± 0.3	APPROVED BY M. ENOMOTO	DATE 1991/04/10	molex MOLEX INCORPORATED			
		ANGULAR	± 3 °	MATERIAL NO.					DOCUMENT NO.
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-5273-001			1 OF 1
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[09-65-2128](#)