

(2.54 mm) .100"

SSM SERIES

TIGER CLAW™ SURFACE MOUNT SOCKET

Mates with:

TSW, MTSW, TST, TSS, ZST, ZSS, DW, EW, ZW, TSM, HMTSW, HTSW, TSSH, BST, HTSS, TLW, MTLW

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?SSM

Insulator Material: Black Liquid Crystal Polymer
Contact Material: Phosphor Bronze
Plating: Au or Sn over 50 μ" (1.27 μm) Ni

Current Rating (SSM/TSW): 5.2 A per pin (1 pin powered per row)
Voltage Rating: 405 VAC / 572 VDC

Operating Temp Range: -55 °C to +125 °C with Gold
 -55 °C to +105 °C with Tin
Contact Resistance: 10 mΩ

Insertion Depth: SV/DV is (4.34 mm) .171" to (7.24 mm) .285" or pass-through from top; (5.56 mm) .219" plus board thickness minimum from bottom; SH/DH is (4.34 mm) .171" to (6.35 mm) .250"

Normal Force: 125 grams (1.21 N) average
RoHS Compliant: Yes

PROCESSING

Lead-Free Solderable: Yes

-DH Coplanarity: Less than 28 positions (0.15 mm) .006" max
 More than 27 positions (0.20 mm) .008" max
-SH, -SV, -DV Coplanarity: (0.15 mm) .006" max

RECOGNITIONS


For complete scope of recognitions see www.samtec.com/quality




Note: Some lengths, styles and options are non-standard, non-returnable.

SSM	1	NO. PINS PER ROW	PLATING OPTION	ROW OPTION	OTHER OPTION
02 thru 36 (-SV, -SH, -DH)					
02 thru 40 (-DV)					
			-F = Gold flash on contact, Matte Tin on tail	-L = 10 μ" (0.25 μm) Gold on contact, Matte Tin on tail	-S = 30 μ" (0.76 μm) Gold on contact, Matte Tin on tail
ALSO AVAILABLE (MOQ Required) <ul style="list-style-type: none"> Alignment pin Contact Samtec. 			APPLICATIONS 		
			-BE = Bottom Entry (-DV & -SV only)	-LC = Locking Clip (-DV & -SV only) Contact Samtec for -DH & -SH	-K = (6.50 mm) .256" DIA Polyimide film Pick & Place Pad (2 positions min.) -DV & -SV only
			-M = Metal Pick & Place Pad (5 positions min.) -DV only	-P = Plastic Pick & Place Pad (-DV & -SV only) (6 pos. minimum, contact Samtec for availability on smaller positions)	-TR = Tape & Reel Packaging (29 positions max.)


-SV
= Single Row Vertical Pin

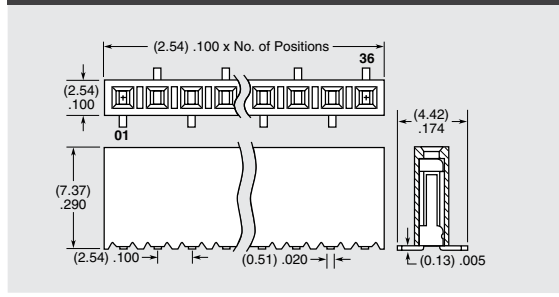

-DV
= Double Row Vertical Pin

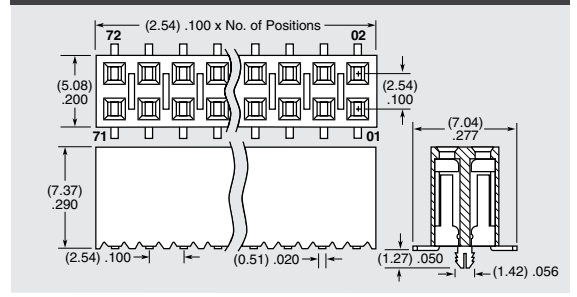

-SH
= Single Row Horizontal Pin

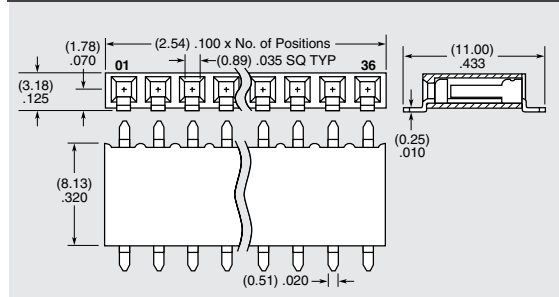

-DH
= Double Row Horizontal Pin

