

Customer Information Sheet

DRAWING No.: M80-826XXXXP

SHEET 2 OF 2

IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

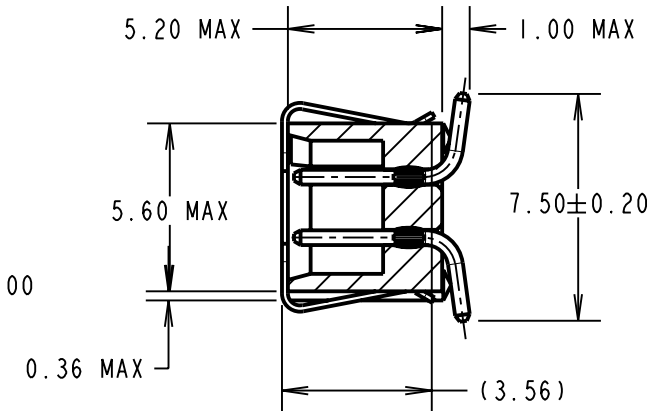
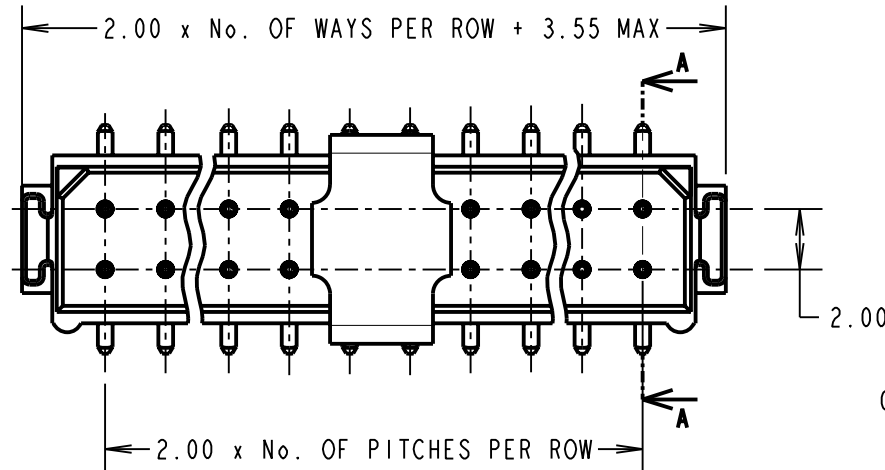
ORDER CODE:

M80-826XXXXP

TOTAL No. OF WAYS

04, 06, 08, 10, 12
14, 16, 18, 20, 26
34, 44

FINISH

06 - TIN/LEAD
22 - SELECTIVE GOLD
+ TIN/LEAD
42 - SELECTIVE GOLD
+ 100% TIN
45 - GOLD
46 - 100% TIN

SECTION A-A

SPECIFICATIONS:

MATERIAL:

MOULDING = POLYAMIDE 46 UL94V-0, BLACK
CONTACTS = PHOSPHOR BRONZE

FINISH:

CONTACTS:

06 = 3.0μ 90/10 TIN/LEAD ALL OVER
22 = 0.75μ GOLD ON CONTACT AREA,
 3.0μ 90/10 TIN/LEAD ON TAILS
42 = 0.75μ GOLD ON CONTACT AREA,
 3.0μ 100% TIN ON TAILS
45 = 0.75μ GOLD ALL OVER
46 = 3.0μ 100% TIN ALL OVER

ELECTRICAL:

CURRENT RATING AT 25°C = 3.0A MAX
CURRENT RATING AT 85°C = 2.2A MAX
WORKING VOLTAGE = 120V AC/DC
VOLTAGE PROOF = 360V AC/DC
CONTACT RESISTANCE (INITIAL) = $20 \text{ m}\Omega \text{ MAX}$
CONTACT RESISTANCE (AFTER CONDITIONING) = $25 \text{ m}\Omega \text{ MAX}$
INSULATION RESISTANCE (INITIAL) = $1,000 \text{ M}\Omega \text{ MIN}$
INSULATION RESISTANCE (AFTER CONDITIONING) = $100 \text{ M}\Omega \text{ MIN}$

MECHANICAL:

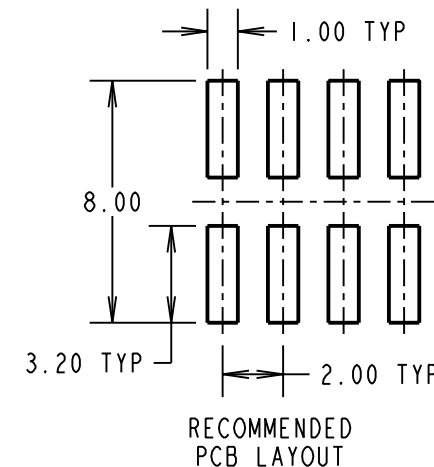
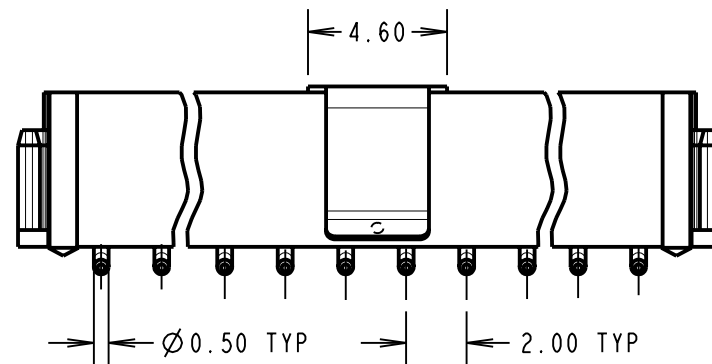
DURABILITY = 500 OPERATIONS

ENVIRONMENTAL:

TEMPERATURE RANGE = -55°C TO $+125^\circ\text{C}$

PACKING:

TUBE

FOR COMPLETE SPECIFICATION, SEE COMPONENT
SPECIFICATION C005XX (LATEST ISSUE)RECOMMENDED
PCB LAYOUT

CP	4	30.09.09	10303
NAME	ISS.	DATE	C/NOTE
APPROVED: C. PENROSE			
CHECKED: R. ADDE			
DRAWN: J. EVANS			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

HARWIN USA

TEL: 603 893 5376
FAX: 603 893 5396
mis@harwin.com

HARWIN Europe (UK)

TEL: 023 9231 4545
FAX: 023 9231 4590
mis@harwin.co.uk

HARWIN Asia

TEL: +65 6 779 4909
FAX: +65 6 779 3868
mis@harwin.com.sgTHIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES

X. = $\pm 1\text{mm}$
X.X = $\pm 0.25\text{mm}$
X.XX = $\pm 0.10\text{mm}$
X.XXX = $\pm 0.01\text{mm}$ ANGLES = $\pm 5^\circ$

UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH: SEE ABOVE

S/AREA:

mm²

TITLE:

DATAMATE DIL
VERTICAL SMT PLUG ASSY
UNLATCHED, P/PLACE

DRAWING NUMBER:

M80-826XXXXPSHT
2
OF
2