

Power Supplies

MRW Series

AC Input

Multi Output, General-Purpose


FEATURES

- This series of light weight power supplies handles a wide range of source voltages(not used for switching between AC.100 and 200V) and provides multiple output voltages.
- Open frame.
- MRW-140, MRW-150, MRW-151, MRW-160 and MRW-161 types are equipped with operation indicator lights.
- These low noise power supplies are FCC class B compliant.

PART NUMBERS AND RATINGS

Part No.	Maximum output power* (W)	Output voltage1 V1		Output voltage2 V2		Output voltage3 V3	
		Voltage(V)	Current(A)	Voltage (V)	Current (A)	Voltage (V)	Current (A)
MRW-140	25.4	+5	0.2 to 1	+12	0.3 to 1.7		
MRW-130	25.5	+5	0.5 to 1.5	+12	0.3 to 1.5[1.7, 10s]		
MRW-135	28	+5	0.5 to 2	+12	0.3 to 1.5[2.5, 3s]		
MRW-150	35	+5	1 to 2.2[Max.4]	+12	0.6 to 1.8[Max.2.5]	-12	0 to 0.1[Max.0.3]
MRW-151	35	+5	1 to 2.2[Max.4]	+15	0.5 to 1.4[Max.2]	-15	0 to 0.1[Max.0.25]
MRW-350	40	+5	0.5 to 3	+12	0.3 to 2	-12	0 to 0.1
MRW-351	40	+5	0.5 to 3	+15.6	0.3 to 1.6	-15	0 to 0.1
MRW-352	40	+3.3	0.5 to 4	+12	0.3 to 2	-12	0 to 0.1
MRW-160	50	+5	1 to 5[Max.6]	+12	0.6 to 2[Max.2.5]	-12	0 to 0.1[Max.0.5]
MRW-161	50	+5	1 to 5[Max.6]	+15	0.5 to 1.5[Max.2]	-15	0 to 0.1[Max.0.4]
MRW-170	65	+5	0.8 to 5[Max.7]	+12	0.3 to 1.7[Max.2.5]	-12	0.3 to 0.7[Max.2.5]
MRW-171	65	+5	0.8 to 5[Max.7]	+15.8	0.3 to 1.3[Max.2]	-15.8	0.3 to 1.3[Max.2]

* Total output power(sum of the respective[output voltage × output current] values) can not exceed this maximum output power.

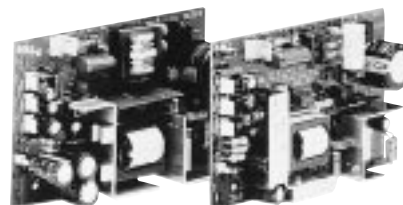

Power Supplies

MRW Series

AC Input

Multi Output, General-Purpose

SPECIFICATIONS

Part No.		MRW-130	
Output voltage, current*1	V ₁	+5V • 1.5A	
	V ₂	+12V • 1.5A[Peak 1.7A, 10s max.]*4	
Maximum output power	W	25.5	
Input requirements			
Input voltage Eac	V	90 to 264	
Input frequency	Hz	47 to 66[Single phase]	
Input current	A	0.8max./0.5max.[100-120/200-240V]	
Fuse rating	A	2[Internal]	
Surge current	A	50max./100max.[100-120/200-240V, 25°C, cold start]	
Leakage current	mA	0.5max./0.75max.[100-120/200-240V]	
Efficiency	%	73typ.[100-120V]	
Output characteristics			
Output voltage	V	+5[V ₁]	+12[V ₂]
Voltage variable range	%	+5, -3	V ₂ varies simultaneously and in the same direction as V ₁
Maximum output current*1	A	1.5	1.5[Peak 1.7A, 10s]*4
Minimum output current*3	A	0.5	0.3
Output setting conditions	Voltage	V	5±0.02
	Current	A	1.5
Voltage stability	Input variation	%	1max.
	Load variation*2	%	2max.
	Temperature variation [0 to +50°C]	%	3max.
	Total variation	%	+4, -3max.
	Drift	%	0.5max.[25°C, input and output ratings, after input voltage ON for 30min to 8h]
	Dynamic load	%/ms	±4max./1max.[50 to 100% sudden load change]
Ripple Ep-p	mV	80max.	120max.
Ripple noise Ep-p	mV	150max.	290max.
Start up time	ms	700typ.	
Hold up time	ms	15typ./10min.[100V input], 25typ./20min.[120V input]	
Accessory equipment			
Operation indicator		None	
Overvoltage protection		Only 5V built-in protection, voltage shielding type(overvoltage threshold 5.8 to 6.9V), recovers upon reset.	
Overcurrent protection		28W min. total power type	
Remote ON-OFF		None	
Remote sensing		None	
Current balance		None	
Output voltage external variable function		None	
Standards			
Safety standards		UL1950, CSA C22.2 No.234, EN60950 (TÜV) approved.	
Noise terminal voltage		FCC class B, VDE0871 class B compliant.	
Construction			
External dimensions H×W×L	mm	35×80×100	
Weight	g	220max.	
Mounting method		Can be attached to 1 side.	
Case and cover		None	
Input and output cables		Sold separately(Part No.:4EU30B217)	

*1 Current rating(maximum output current) is determined for 0 to +50°C. Derating is required when used outside this temperature range.

*2 Load variation was determined only for the measured output. The non-measured output was kept fixed(1.5A for V1, 1.5A for V2).

*3 Normal output voltages might possibly not be maintained if outputs V1, V2 fall below these minimum current values.

*4 Load current should exceed 1.5A at +12V for time intervals no longer than 10s. The effective current should be kept below 1.5A.

Power Supplies

MRW Series

AC Input

Multi Output, General-Purpose

SPECIFICATIONS

Part No.		MRW-135		
Output voltage, current*1		V ₁	+5V • 2A	
		V ₂	+12V • 1.5A[Peak 2.5A, 3s max.]*4	
Maximum output power		W	28	
Input requirements				
Input voltage Eac		V	90 to 264	
Input frequency		Hz	47 to 66[Single phase]	
Input current		A	0.8max./0.5max.[100-120/200-240V]	
Fuse rating		A	2[Internal]	
Surge current		A	50max./100max.[100-120/200-240V, 25°C, cold start]	
Leakage current		mA	0.5max./0.75max.[100-120/200-240V]	
Efficiency		%	73typ.[100-120V]	
Output characteristics				
Output voltage		V	+5[V ₁] +12[V ₂]	
Voltage variable range		%	+5, −3 V ₂ varies simultaneously and in the same direction as V ₁ .	
Maximum output current*1		A	2 1.5[Peak 2.5A, 3s]*4	
Minimum output current*3		A	0.5 0.3	
Output setting Voltage		V	5±0.02 —	
conditions	Current	A	2 1.5	
	Input variation	%	1max. 1.5max.[90 to 132V/180 to 264V]	
	Load variation*2	%	2max. 3max.	
	Temperature variation [0 to +50°C]	%	2max. 3max.	
	Total variation	%	+4, −3max. ±5max.	
	Drift	%	0.5max.[25°C, input and output ratings, after input voltage ON for 30min to 8h]	
	Dynamic load	%/ms	±4max./1max.[50 to 100% sudden load change]	
Ripple Ep-p		mV	80max. 120max.	
Ripple noise Ep-p		mV	150max. 290max.	
Start up time		ms	750typ.	
Hold up time		ms	15typ./10min.[100V input], 25typ./20min.[120V input]	
Accessory equipment				
Operation indicator		None		
Overvoltage protection		Only 5V built-in protection, voltage shielding type(overvoltage threshold 5.8 to 6.9V), recovers upon reset.		
Overcurrent protection		41W min. total power type		
Remote ON-OFF		None		
Remote sensing		None		
Current balance		None		
Output voltage external variable function		None		
Standards				
Safety standards		UL1950, CSA ELECTRICAL BULLETIN No.1402C, EN60950 (TÜV) approved.		
Noise terminal voltage		FCC class B, VDE0871 class B compliant.		
Construction				
External dimensions H×W×L		mm	35×80×120	
Weight		g	300max.	
Mounting method		Can be attached to 1 side.		
Case and cover		—		
Input and output cables		Sold separately(Part No.:4EU20B241)		

*1 Current rating(maximum output current) is determined for 0 to +50°C. Derating is required when used outside this temperature range.

*2 Load variation was determined only for the measured output. The non-measured output was kept fixed(1.5A for V1, 1.5A for V2).

*3 Normal output voltages might possibly not be maintained if outputs V1, V2 fall below these minimum current values.

*4 Load current should exceed 1.5A at +12V for time intervals no longer than 10s. The effective current should be kept below 1.5A.

Power Supplies

MRW Series

AC Input

Multi Output, General-Purpose

SPECIFICATIONS

Part No.		MRW-140	
Output voltage, current*1	V1	+5V • 1A	
	V2	+12V • 1.7A	
Maximum output power	W	25.4	
Input requirements			
Input voltage Eac	V	90 to 264	
Input frequency	Hz	47 to 66[Single phase]	
Input current	A	0.7max./0.45max.[100-120/200-240V]	
Fuse rating	A	2[Internal]	
Surge current	A	50max./100max.[100-120/200-240V, 25°C, cold start]	
Leakage current	mA	0.5max./0.75max.[100-120/200-240V]	
Efficiency	%	73typ.	
Output characteristics			
Output voltage	V	+5[V1]	+12[V2]
Voltage variable range	%	+5, −3	V2 varies simultaneously and in the same direction as V1.
Maximum output current*1	A	1	1.7
Minimum output current*3	A	0.2	0.3
Output setting conditions	Voltage	V	5.1±0.03
Voltage stability	Current	A	1
	Input variation	%	1max.
	Load variation*2	%	1.5max.
	Temperature variation [0 to +50°C]	%	2max.
	Total variation	%	+5, −1max.
	Drift	%	0.5max.[25°C, input and output ratings, after input voltage ON for 30min to 8h]
	Dynamic load	%/ms	±4max./1max.[50 to 100% sudden load change]
Ripple Ep-p	mV	80max.	120max.
Ripple noise Ep-p	mV	150max.	290max.
Start up time	ms	500typ.	
Hold up time	ms	15typ./10min.[100V input], 25typ./20min.[120V input]	
Accessory equipment			
Operation indicator		None	
Overvoltage protection		Only 5V built-in protection, voltage shielding type(overvoltage threshold 5.8 to 6.9V), recovers upon reset.	
Overcurrent protection		26W min. total power type	
Remote ON-OFF		None	
Remote sensing		None	
Current balance		None	
Output voltage external variable function		None	
Standards			
Safety standards		—	
Noise terminal voltage		FCC class B, VDE0871 class B compliant.	
Construction			
External dimensions H×W×L	mm	27×100×160	
Weight	g	300max.	
Mounting method		Can be attached to 1 side.	
Case and cover		—	
Input and output cables		Sold separately(Part No.: 4EU40B153)	

*1 Current rating(maximum output current) is determined for 0 to +50°C. Derating is required when used outside this temperature range.

*2 Load variation was determined only for the measured output. The non-measured output was kept fixed(1.5A for V1, 1.5A for V2).

*3 Normal output voltages might possibly not be maintained if outputs V1, V2 fall below these minimum current values.

Power Supplies

MRW Series

AC Input

Multi Output, General-Purpose

SPECIFICATIONS

Part No.		MRW-150			MRW-151			
Output voltage, current *1	V ₁	+5V • 2.2A(4A)*4			+5V • 2.2A(4A)*4			
	V ₂	+12V • 1.8A(2.5A)*4			+15V • 1.4A(2A)*4			
	V ₃	−12V • 0.1A(0.3A)*4			−15V • 0.1A(0.25A)*4			
Maximum output power	W	35			35			
Input requirements								
Input voltage Eac	V	90 to 264						
Input frequency	Hz	47 to 66[Single phase]						
Input current	A	1max./0.5max.[100/200V, at maximum output power]						
Fuse rating	A	2.5[Internal]						
Surge current	A	50max./100max.[100/200V, 25°C, cold start]						
Leakage current	mA	0.5max./0.75max.[100/200V, 25°C, output rating]						
Efficiency	%	70typ.			70typ.			
Output characteristics								
Output voltage	V	+5[V ₁]	+12[V ₂]	−12[V ₃]	+5[V ₁]	+15[V ₂]	−15[V ₃]	
Voltage variable range	%	+5, −3	V ₂ varies simultaneously and in the same direction as V ₁ .		+5, −3	V ₂ varies simultaneously and in the same direction as V ₁ .		
Maximum output current*1	A	4	2.5	0.3	4	2	0.25	
Rated output current	A	2.2	1.8	0.1	2.2	1.4	0.1	
Minimum output current*2	A	1	0.6	0	1	0.5	0	
Output setting Voltage	V	5±0.02	—	—	5±0.02	—	—	
conditions Current	A	2.2	1.8	0.1	2.2	1.4	0.1	
Overvoltage threshold	V	5.8 to 6.9			5.8 to 6.9			
Voltage stability	Input variation	%	1typ.	1typ.	1typ.	1typ.	1typ.	
	Load variation*3	%	3typ.	5typ.	3typ.	5typ.	1typ.	
	Temperature variation [0 to +50°C]	%	2typ.	2typ.	1typ.	2typ.	2typ.	
	Total variation	%	+4, −2max.	±5max.	±6max.	+4, −2max.	+3, −8max. ±6max.	
	Drift	%	0.5max.[25°C, input and output ratings, after input voltage ON for 30min to 8h]					
	Dynamic load	%/ms	±4max./2max.[50 to 100% sudden load change]					
Ripple Ep-p	mV	50max.	80max.	30max.	80max.	120max.	30max.	
Ripple noise Ep-p	mV	150max.	290max.	290max.	150max.	350max.	350max.	
Start up time	ms	600max.[25°C, input and output ratings]			530max.[25°C, input and output ratings]			
Rise time	ms	20max.[25°C, input and output ratings]			10max.[25°C, input and output ratings]			
Hold up time	ms	15min.[25°C, input and output ratings]			15min.[25°C, input and output ratings]			
Accessory equipment								
Operation indicator		None						
Overvoltage protection		Only 5V built-in protection, voltage shielding type, recovers upon reset (interval approx. 45s).						
Overcurrent protection		36W min. total power type						
Remote ON-OFF		None						
Remote sensing		None						
Standards								
Safety standards		UL1950, CSA C22.2 No.234(MRW-151: CSA EB No.1402C), EN60950 (TÜV) approved.						
Noise terminal voltage		FCC class B, VDE0871 class B compliant.						
Construction								
External dimensions H×W×L	mm	30×100×160						
Weight	g	350max.						
Mounting method		1 side(Open frame)						
Case and cover		Frame/cover sold separately(Part No.: 2JF00B157/2JC0ZB156)						
Input and output cables		Sold separately(Part No.:4EU40B153)						

*1 Current rating(maximum output current) is determined for 0 to +50°C. Derating is required when used outside this temperature range.

*2 Normal output voltages might possibly not be maintained if outputs V2, V3 fall below V1 minimum current values.

*3 Load range

V1:1 to 2.2A, V2:0.6 to 1.8A, V3:0 to 0.1A

*4 At the maximum output current value within the parentheses, the sum of all output(V1,V2 and V3) power values can not exceed this maximum output power.

Power Supplies

MRW Series

AC Input

Multi Output, General-Purpose

SPECIFICATIONS

Part No.		MRW-160			MRW-161			
Output voltage, current*1		V ₁	+5V • 5A(6A)*4			+5V • 5A(6A)*4		
		V ₂	+12V • 2A(2.5A)*4			+15V • 1.5A(2A)*4		
		V ₃	−12V • 0.1A(0.5A)*4			−15V • 0.1A(0.4A)*4		
Maximum output power		W	50			50		
Input requirements								
Input voltage Eac		V	90 to 264					
Input frequency		Hz	47 to 66[Single phase]					
Input current		A	1.3max./0.8max.[100-120/200-240V]					
Fuse rating		A	3[Internal]					
Surge current		A	50max./100max.[100-120/200-240V, 25°C, cold start]					
Leakage current		mA	0.5max./0.75max.[100-120/200-240V]					
Efficiency		%	75typ.			73typ.		
Output characteristics								
Output voltage		V	+5[V ₁]	+12[V ₂]	−12[V ₃]	+5[V ₁]	+15[V ₂]	−15[V ₃]
Voltage variable range		%	+5, −3	V ₂ varies simultaneously and in the same direction as V ₁ .		+5, −3	V ₂ varies simultaneously and in the same direction as V ₁ .	
Maximum output current*1		A	6	2.5	0.5	6	2	0.4
Rated output current		A	5	2	0.1	5	1.5	0.1
Minimum output current *2		A	1	0.6	0	1	0.5	0
Output setting conditions	Voltage	V	5±0.02	—	—	5±0.02	—	—
	Current	A	2.5	2	0.1	2.5	1.5	0.1
Voltage stability	Input variation	%	2max.	2max.	1max.	2max.	2max.	1max.
	Load variation*3	%	4max.	2max.	1max.	4max.	2max.	1max.
	Temperature variation [0 to +50°C]	%	2max.	2max.	1max.	2max.	2max.	1max.
	Total variation	%	±4max.	+6, −4max.	±6max.	±4max.	+8, −2max.	±6max.
	Drift	%	0.5max.[25°C, input and output ratings, after input voltage ON for 30min to 8h]					
Dynamic load		%/ms	±4max./1max.[50 to 100% sudden load change]					
Ripple Ep-p		mV	80max.	80max.	30max.	80max.	80max.	30max.
Ripple noise Ep-p		mV	150max.	290max.	290max.	150max.	350max.	350max.
Start up time		ms	500typ.					
Hold up time		ms	30typ./20min.					
Accessory equipment								
Operation indicator			None					
Overvoltage protection			Only 5V built-in protection, voltage shielding type(overvoltage threshold 5.8 to 6.9V), recovers upon reset.					
Overcurrent protection			60W min. total power type					
Remote ON-OFF			None					
Remote sensing			None					
Current balance			None					
Output voltage external variable function			None					
Standards								
Safety standards			UL1950, CSA ELECTRICAL BULLETIN No.1402C, EN 60950 (TÜV) approved.					
Noise terminal voltage			FCC class B, VDE0871 class B compliant.					
Construction								
External dimensions H×W×L		mm	38×100×160					
Weight		g	500max.					
Mounting method			Can be attached to 1 side.					
Case and cover			Frame/cover sold separately (Part No.: 2JF00B167/2JC0ZB166)					
Input and output cables			Sold separately(Part No.: 4EU40B153)					

*1 Current rating(maximum output current) is determined for 0 to +50°C. Derating is required when used outside this temperature range.

*2 Normal output voltages might possibly not be maintained if outputs V2, V3 fall below V1 minimum current values.

*3 Load variation will be specified from the minimum output current to the rated output current range.

*4 At the maximum output current value within the parentheses, the sum of all output(V1,V2 and V3) power values can not exceed this maximum output power.

Power Supplies

MRW Series

AC Input

Multi Output, General-Purpose

SPECIFICATIONS

Part No.		MRW-170			MRW-171		
Output voltage, current*1	V ₁	+5V • 5A(7A)*4			+5V • 5A(7A)*4		
	V ₂	+12V • 1.7A(2.5A)*4			+15.8V • 1.3A(2A)*4		
	V ₃	−12V • 1.7A(2.5A)*4			−15.8V • 1.3A(2A)*4		
Maximum output power	W	65			65		
Input requirements							
Input voltage Eac	V	85 to 264					
Input frequency	Hz	47 to 66[Single phase]					
Input current	A	1.7max./0.9max.[100/200V]					
Fuse rating	A	3.15[Internal]					
Surge current	A	50max./100max.[115/230V, 25°C, cold start]					
Leakage current	mA	0.5max./0.75max.[115/230V, 25°C, output rating]					
Efficiency	%	70typ.			70typ.		
Output characteristics							
Output voltage	V	+5[V ₁]	+12[V ₂]	−12[V ₃]	+5[V ₁]	+15.8[V ₂]	−15.8[V ₃]
Voltage variable range	V	—					
Maximum output current*1	A	7	2.5	2.5	7	2	2
Rated output current	A	5	1.7	1.7	5	1.3	1.3
Minimum output current*2	A	0.8	0.3	0.3	0.8	0.3	0.3
Output setting	Voltage	V	5±0.02	—	5±0.02	—	—
conditions	Current	A	5	1.7	5	1.3	1.3
Overvoltage threshold	V	5.8 to 6.9			5.8 to 6.9		
Voltage stability	Input variation	%	1typ.	1typ.	1typ.	1typ.	1typ.
	Load variation*3	%	3.5typ.	5typ.	5typ.	3.5typ.	5typ.
	Temperature variation [0 to +50°C]	%	2typ.	3.5typ.	3.5typ.	2typ.	3.5typ.
	Total variation	%	±4max.	+8, −7max.	+8, −7max.	±4max.	+8, −7max.
	Drift	%	0.5max.[25°C, input and output ratings, after input voltage ON for 30min to 8h]				
	Dynamic load	%/ms	±4max./0.5max.[50 to 100% sudden load change]				
Ripple Ep-p	Source	mV	30max.	30max.	30max.	30max.	30max.
	Switching	mV	50max.	50max.	50max.	50max.	50max.
Ripple noise Ep-p	mV	150max.	250max.	250max.	150max.	250max.	250max.
Start up time	ms	600typ.[115V]					
Hold up time	ms	20typ./15min.[115V]					
Accessory equipment							
Operation indicator		None					
Overvoltage protection		Only 5V built-in protection, voltage shielding type, recovers upon reset.					
Overcurrent protection		66W min. total power type					
Remote ON-OFF		None					
Remote sensing		None					
Standards							
Safety standards		UL1950, CSA C22.2 No.234, EN60950 (TÜV) approved.					
Noise terminal voltage		FCC class B, VDE0871 class B compliant.					
Construction							
External dimensions H×W×L	mm	38×100×160					
Weight	g	450max.					
Mounting method		1 side(Open frame)					
Case and cover		—					
Input and output cables		—					

*1 Current rating(maximum output current) is determined for 0 to +50°C. Derating is required when used outside this temperature range.

*2 Normal output voltages might possibly not be maintained if outputs V2, V3 fall below V1 minimum current values.

*3 Load variation will be specified from the minimum output current to the rated output current range.

*4 At the maximum output current value within the parentheses, the sum of all output(V1, V2 and V3) power values can not exceed this maximum output power.

Power Supplies

MRW Series

AC Input

Multi Output, General-Purpose

SPECIFICATIONS

Part No.		MRW-350			MRW-351			MRW-352			
Output voltage, current *1	V ₁	+5V • 3A			+5V • 3A			+3.3V • 4A			
	V ₂	+12V • 2A			+15.6V • 1.6A			+12V • 2A			
	V ₃	−12V • 0.1A			−15V • 0.1A			−12V • 0.1A			
Maximum output power	W	40			40			40			
Input requirements											
Input voltage Eac	V	90 to 264									
Input frequency	Hz	47 to 66[Single phase]									
Input current	A	0.9max./0.55max.[100/240V]									
Fuse rating	A	2[Internal]									
Surge current	A	50max./100max.[115/230V, 25°C, cold start]									
Leakage current	mA	0.5max./0.75max.[115/230V, 25°C, output rating]									
Efficiency	%	70typ.									
Output characteristics											
Output voltage	V	+5[V ₁]	+12[V ₂]	−12[V ₃]	+5[V ₁]	+15.6[V ₂]	−15[V ₃]	+3.3[V ₁]	+12[V ₂]	−12[V ₃]	
Voltage variable range	V	—									
Maximum output current *1	A	3	2	0.1	3	1.6	0.1	4	2	0.1	
Minimum output current*2	A	0.5	0.3	0	0.5	0.3	0	0.5	0.3	0	
Output setting Voltage	V	5±0.02	—	—	5±0.02	—	—	3.3±0.02	—	—	
conditions Current	A	3	2	0	3	1.6	0	4	2	0	
Overvoltage threshold	V	5.8 to 6.9			5.8 to 6.9			5.8 to 6.9			
Voltage stability	Input variation	%	1typ.	1typ.	1typ.	1typ.	1typ.	1typ.	1typ.	1typ.	
	Load variation*3	%	2typ.	4typ.	1typ.	2typ.	4typ.	1typ.	2typ.	4typ.	
	Temperature variation [0 to +50°C]	%	2typ.	3.5typ.	1typ.	2typ.	3.5typ.	1typ.	2typ.	3.5typ.	
	Total variation	%	±3.5max. ±7max.		±7max.		±3.5max. ±7max.		±7max. ±4max.		
	Drift	%	0.5max.[25°C, input and output ratings, after input voltage ON for 30min to 8h]								
	Dynamic load	%/ms	±4max./0.5typ.[50 to 100% sudden load change]								
Ripple Ep-p	Source	mV	30max.	100max.	10max.	30max.	120max.	10max.	30max.	100max.	
	Switching	mV	25max.	20max.	20max.	25max.	20max.	20max.	25max.	20max.	
Ripple noise Ep-p	mV	150max.	250max.	250max.	150max.	250max.	250max.	200max.	250max.	250max.	
Start up time	ms	500typ.[120V]									
Hold up time	ms	20typ./15min.[120V]									
Accessory equipment											
Operation indicator	None										
Overvoltage protection	Only 5V built-in protection, voltage shielding type, recovers upon reset.										
Overcurrent protection	41W min. total power type										
Remote ON-OFF	None										
Remote sensing	None										
Standards											
Safety standards	UL1950, CSA C22.2 No.234, EN60950 (TÜV) approved.										
Noise terminal voltage	FCC class B, VDE0871 class B compliant.										
Construction											
External dimensions H×W×L	mm	36.75×76×127									
Weight	g	240max.									
Mounting method	1 side(Open frame)										
Case and cover	—										
Input and output cables	—										

*1 Current rating(maximum output current) is determined for 0 to +50°C. Derating is required when used outside this temperature range.

*2 Normal output voltages might possibly not be maintained if outputs V2, V3 fall below V1 minimum current values.

*3 Load variation will be specified from the minimum output current to the rated output current range.


Power Supplies

AC Input
Multi Output, General-Purpose


MRW Series

TERMINAL DESIGNATIONS AND FUNCTIONS


MRW-130

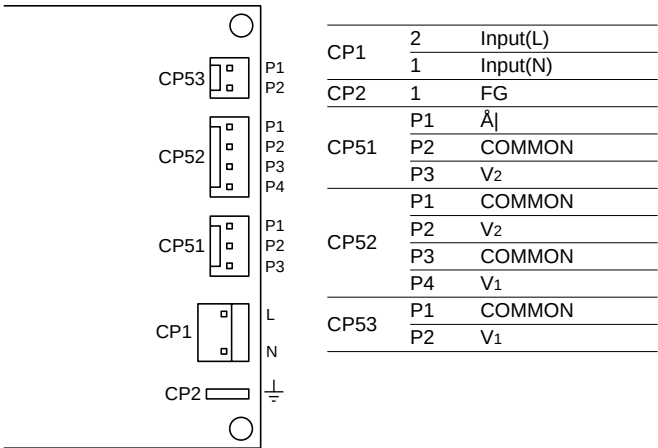


MRW-135

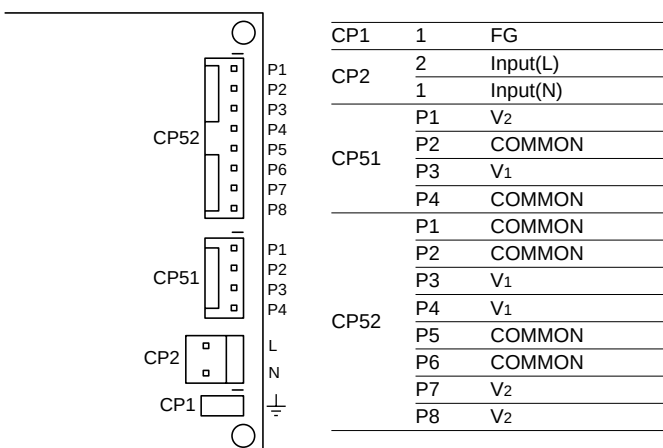

MRW-140

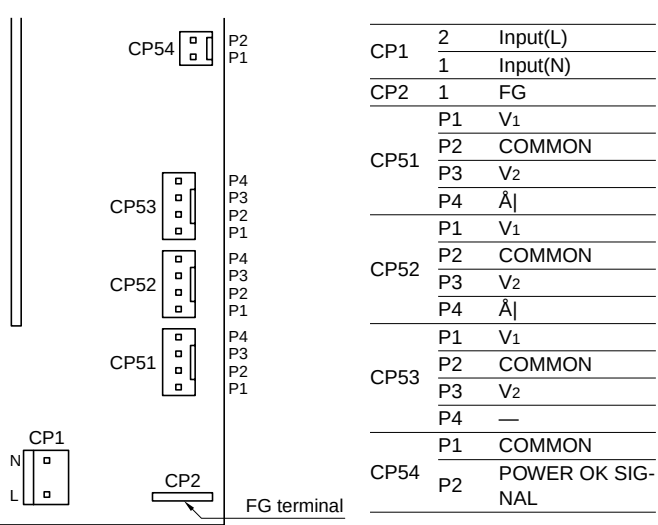

MRW-150, 151, 160, 161

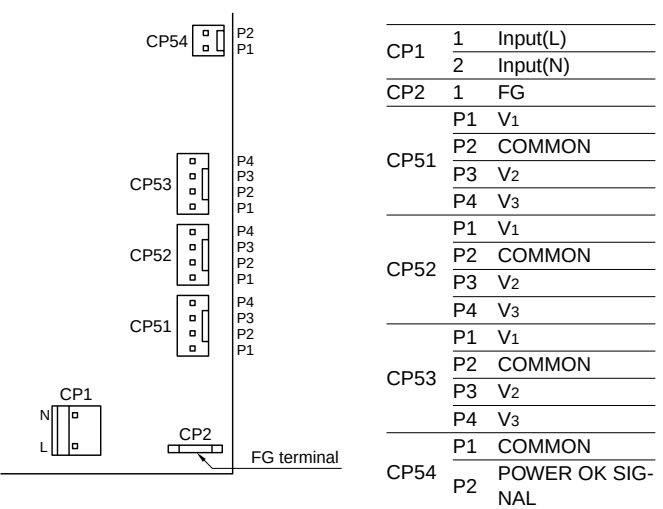


Power Supplies

AC Input
Multi Output, General-Purpose

MRW Series


TERMINAL DESIGNATIONS AND FUNCTIONS

MRW-170, 171

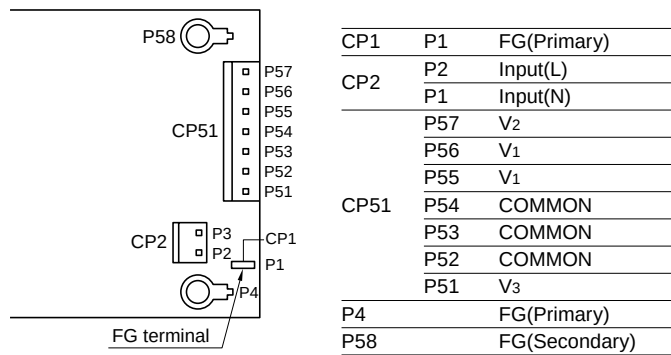

- AC input terminals(L, N)
Connect to AC.100/120V or 200/240V single phase power supply.
- Frame ground terminal(G)
Connect to earth ground. This is connected to the case.
- DC output terminals(V1, V2, V3)
Wire to loads.

MRW-350, 351, 352

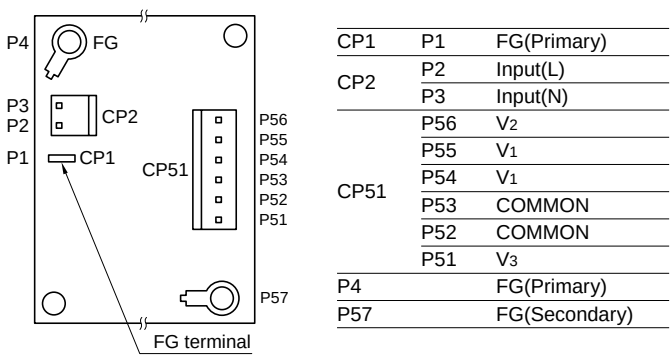

- DC output common terminal(COMMON)
Wire to loads.
- Power OK signal output terminal(POWER OK SIGNAL)
Signal is output when +5V output voltage exceeds 4.5V(applyes to MRW-140, MRW-150, MRW-151, MRW-160 and MRW-161).