
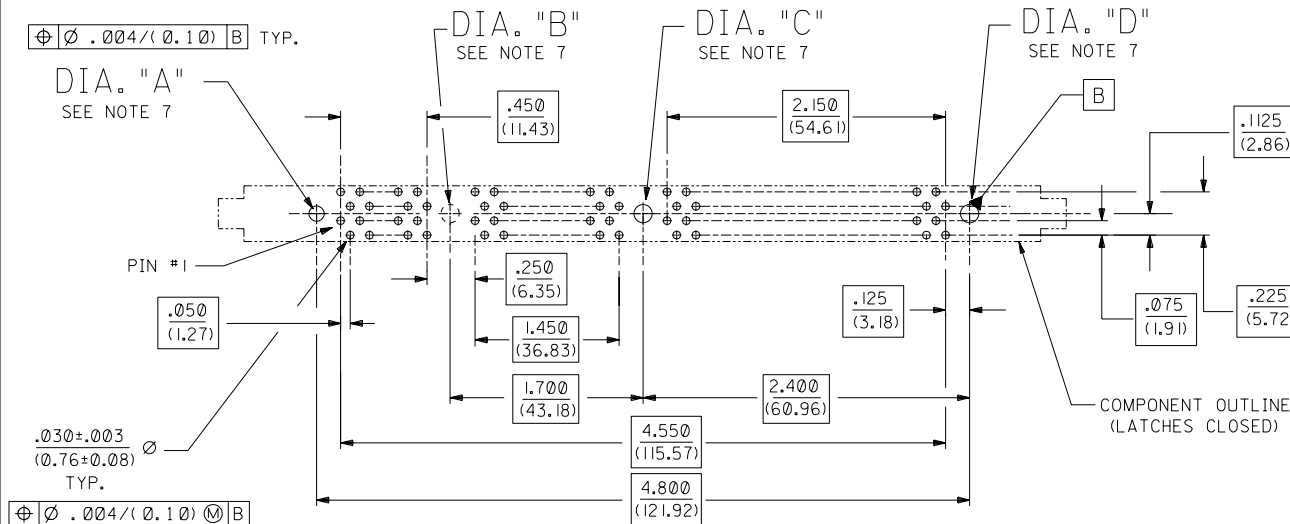
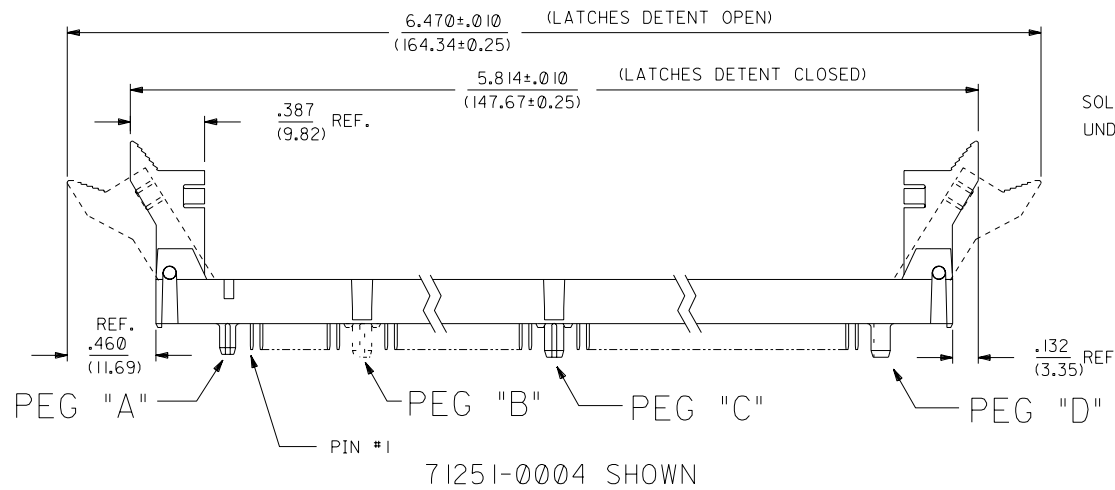


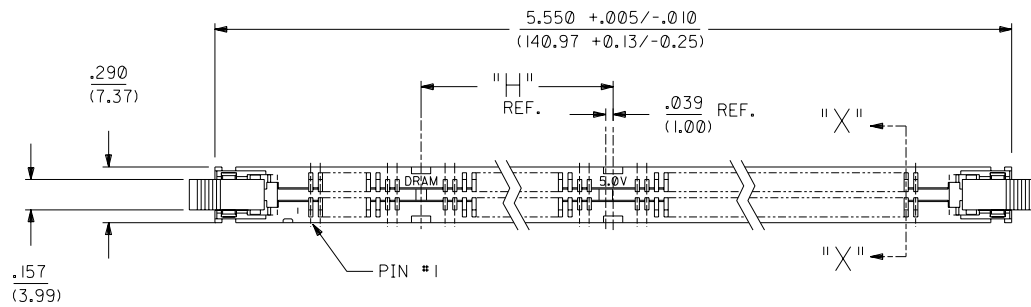

RECOMMENDED
P.C. BOARD HOLE PATTERN
(CONNECTOR SIDE)

NOTES:

1. CARD SLOT ACCEPTS .050±.004 (1.27±0.10) MODULE THICKNESS. (MEASURED OVER P.C. PADS).
2. ALL PEGS ARE INTERFERENCE FITS TO PCB UNLESS NOTED ON THE DWG.
3. REFER TO PRODUCT SPEC PS-71243-9999 FOR PERFORMANCE SPECIFICATIONS.
4. PRODUCT IS PACKAGED IN TRAYS.
5. RECOMMENDED MODULE LAYOUT SHALL BE PER JEDEC MO-161.
6. RECOMMENDED PLATING ON MODULE PADS: 30 MICROINCH/(0.76 MICROMETER) MINIMUM HARD GOLD (Au) OVER 79 MICROINCH/(2.0 MICROMETER) MINIMUM NICKEL (Ni).
7. SEE CHART FOR HOLE SIZE AND PRESENCE AND PLATING OPTION.
8. PRODUCT WILL HAVE DATE CODE STAMPED ON SIDE OF HOUSING.


MATERIALS:

HOUSING - GLASS FILLED LIQUID CRYSTAL POLYMER (LCP), UL 94V-0, COLOR: BLACK.
TERMINAL - PHOSPHOR BRONZE
LATCHES - GLASS FILLED HIGH TEMPERATURE NYLON, UL 94V-0, COLOR: IVORY.

PLATING:


CONTACT AREA: OPTION A: GOLD (Au) FLASH: THICKNESS=2-10 MICROINCH/(0.05-0.25 MICROMETER), OVER PALLADIUM-NICKEL (Pd-Ni): THICKNESS=30 MICROINCH/(0.76 MICROMETER) MINIMUM.
OPTION B: GOLD (Au) FLASH: THICKNESS=2-10 MICROINCH/(0.05-0.25 MICROMETER), OVER PALLADIUM-NICKEL (Pd-Ni): THICKNESS=20 MICROINCH/(0.51 MICROMETER) MINIMUM.

SOLDER TAILS: TIN (Sn): THICKNESS=150 MICROINCH/(3.81 MICROMETER) MINIMUM.
UNDERPLATE: NICKEL (Ni) OVER ENTIRE CONTACT.



NOTE FOR LEAD FREE CONVERSION:

THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.

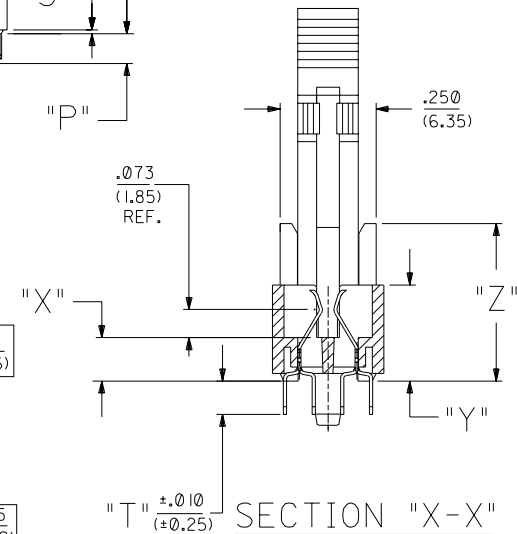

SCALE 4:1

3	H
2	F3
1	HI
MFG.	SH.
REV.	LTR.
REV.	REVISIONS


DIMENSIONS SHOWN (METRIC) INCH		UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°	
3 PLACE	± .005	INCH	METRIC
2 PLACE	± ---	± 0.13	± 0.25
1 PLACE	---	± 0.25	---
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			
DRWG. BY	DCB	CHK'D BY	DCB
APP'D BY	DCB	SCALE	2: 1
FILE NAME		DATE	
ST125101.DGN		10/10/94	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		CP	

H1	ADD LEAD FREE NOTE ECR# UCP2004-1732 DMORGAN 04/03/09
H	RELEASE -0027 ECR# UDT2000-1151 DMORGAN 00/05/19
H	RELEASE -0027 ECR# UDT2000-1151 DMORGAN 00/05/19
G	CHG Sn-Pb THICKNESS ECR# UDT1999-0454 DMORGAN 99/08/09
F3	REVISED PER ECR# U80435 97-8-8 LAURX
F2	REVISED PER ECR# U71162 97-4-15 LAURX
F1	REVISED PER ECR# U70367 96-10-9 LAURX
F	REVISED PER ECR# U61133 96-9-25 LAURX
E1	REVISED PER ECR# U60682 1-19-96 JCL
E	REVISED PER ECR# U60452 12-7-95 JCL
D2	REVISED PER ECR# U60452 10-10-95 JCL
D1	REVISED PER ECR# U60361 9-18-95 JCL
D	REVISED PER ECR# U51288 8-4-95 JCL

13		12		11	10	9	8	7	6	71251		4	3	2	1		
PART NUMBER	COLOR	DESCRIPTION	FUNCTION KEY	VOLTAGE KEY	DIA. "A"	DIA. "B"	DIA. "C"	DIA. "D"	DIM. "H"	DIM. "P"	DIM. "S"	DIM. "T"	DIM. "W"	DIM. "X"	DIM. "Y"	DIM. "Z"	CONTACT AREA PLATING
71251-0001	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	.080±.002 (2.03±0.05)	NONE	.093 ±.003/- .000 (2.36+0.08/-0.00)	.093 ±.003/- .000 (2.36+0.08/-0.00)	1.700 (43.18)	.155 (3.94)	.020 (0.51)	.127 (3.23)	.970 (24.64)	.113 (2.87)	.250 (6.35)	.410 (10.41)	OPTION A
71251-0004	BLACK	5.0 VOLT STD DRAM	CENTER	OFFSET LEFT	.080±.002 (2.03±0.05)	NONE	.093 ±.003/- .000 (2.36+0.08/-0.00)	.093 ±.003/- .000 (2.36+0.08/-0.00)	1.700 (43.18)	.155 (3.94)	.020 (0.51)	.127 (3.23)	.970 (24.64)	.113 (2.87)	.250 (6.35)	.410 (10.41)	OPTION A
71251-0012	BLACK	3.3 VOLT UNBUFFERED	OFFSET RIGHT	CENTER	.080±.002 (2.03±0.05)	NONE	.093 ±.003/- .000 (2.36+0.08/-0.00)	.093 ±.003/- .000 (2.36+0.08/-0.00)	1.661 (42.19)	.155 (3.94)	.020 (0.51)	.127 (3.23)	.970 (24.64)	.113 (2.87)	.250 (6.35)	.410 (10.41)	OPTION A
71251-0013	BLACK	5.0 VOLT UNBUFFERED	OFFSET RIGHT	OFFSET LEFT	.080±.002 (2.03±0.05)	NONE	.093 ±.003/- .000 (2.36+0.08/-0.00)	.093 ±.003/- .000 (2.36+0.08/-0.00)	1.661 (42.19)	.155 (3.94)	.020 (0.51)	.127 (3.23)	.970 (24.64)	.113 (2.87)	.250 (6.35)	.410 (10.41)	OPTION A
71251-0016	BLACK	3.3 VOLT SYNCHRONOUS	OFFSET LEFT	CENTER	.080±.002 (2.03±0.05)	NONE	.093 ±.003/- .000 (2.36+0.08/-0.00)	.093 ±.003/- .000 (2.36+0.08/-0.00)	1.739 (44.17)	.155 (3.94)	.020 (0.51)	.127 (3.23)	.970 (24.64)	.113 (2.87)	.250 (6.35)	.410 (10.41)	OPTION A
71251-0017	BLACK	5.0 VOLT SYNCHRONOUS	OFFSET LEFT	OFFSET LEFT	.080±.002 (2.03±0.05)	NONE	.093 ±.003/- .000 (2.36+0.08/-0.00)	.093 ±.003/- .000 (2.36+0.08/-0.00)	1.739 (44.17)	.155 (3.94)	.020 (0.51)	.127 (3.23)	.970 (24.64)	.113 (2.87)	.250 (6.35)	.410 (10.41)	OPTION A

NOTES:


1. STRAIGHTNESS OF MODULE APPLIES TO THE AREA FROM THE BOTTOM OF THE CARD UP .157/(4.00).
2. IF TIE BARS ARE ATTACHED TO PADS, THE TIE BAR SHOULD BE ON AN INTERNAL LAYER, SO THAT THE REMNANT CANNOT CAUSE DAMAGE TO THE CONTACTS.

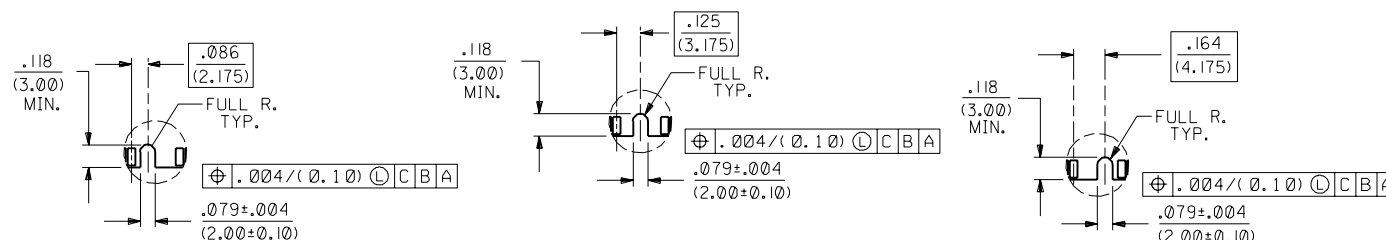

OFFSET LEFT KEY

CENTERED KEY

OFFSET RIGHT KEY

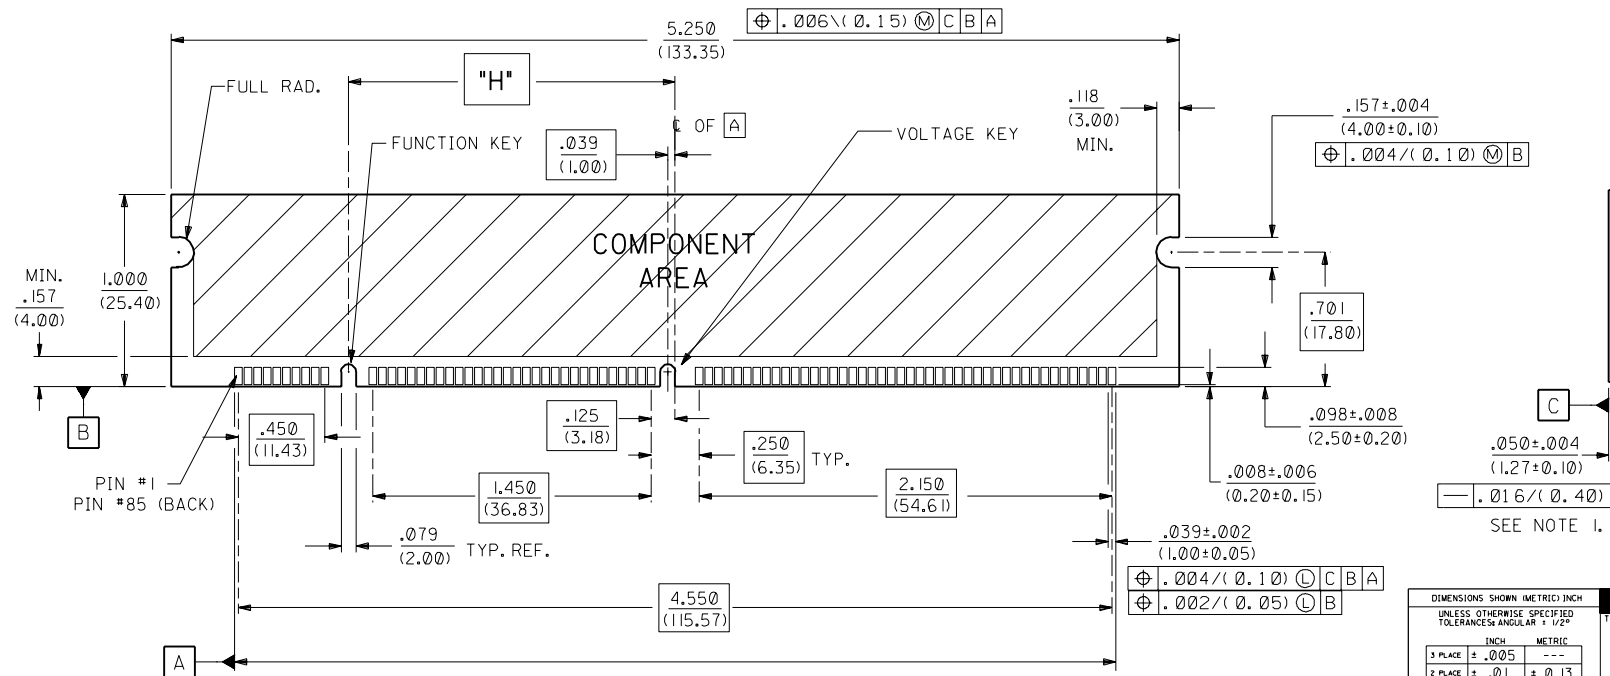

(OUTSIDE EDGE OF END PADS)

RECOMMENDED MODULE LAYOUT
168 CKT 5.0V DRAM SHOWN

F3	SEE SHEET I
F2	SEE SHEET I
F1	SEE SHEET I
F	SEE SHEET I
E1	SEE SHEET I
E	SEE SHEET I
D2	SEE SHEET I
D1	SEE SHEET I
D	SEE SHEET I
C	SEE SHEET I
B1	SEE SHEET I
B	SEE SHEET I
A	SEE SHEET I

MFG.	SH.	REV.	LTR.	REVISIONS
------	-----	------	------	-----------

DIMENSIONS SHOWN (METRIC) INCH				REVISE ONLY ON CAD SYSTEM			
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE $\pm 1/2^\circ$							
		INCH		METRIC			
3 PLACE	$\pm$	<u>.005</u>	---				
2 PLACE	$\pm$	<u>.01</u>	<u>0.13</u>				
1 PLACE	---	$\pm$	<u>0.25</u>				
DRAFT WHEN APPLICABLE MUST REMAIN WITHIN DIMENSIONS							
DWG. BY	DCB	CHKD BY	DCB	SEE CHART		SDA-71251-0***	
APP'D.	DCB	SCALE	2CB				
MOLEX INCORPORATED 135 LILL. 69532 U.S.A.				SHEET NO. 2		DATE 10/10/94	
PART NO. 57125102				DRWG. NO. SDA-71251-0***			
FILE NAME 57125102				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			
				DIV. CP		SIZE C	

I3		I2		I1		I0		9		8		7		6		71251		4		3		2		1			
PART NUMBER	COLOR	DESCRIPTION	FUNCTION KEY	VOLTAGE KEY	DIA. "A"		DIA. "B"		DIA. "C"		DIA. "D"		DIM. "H"	DIM. "P"	DIM. "S"	DIM. "T"	DIM. "W"	DIM. "X"	DIM. "Y"	DIM. "Z"	CONTACT AREA PLATING						
71251-0001	BLACK	3.3 VOLT STD DRAM	SEE SHEET 2																		OPTION A						
71251-0002	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		NONE		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A						
71251-0003	BLACK	5.0 VOLT STD DRAM	CENTER	OFFSET LEFT	NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		NONE		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A						
71251-0004	BLACK	5.0 VOLT STD DRAM	SEE SHEET 2																		OPTION A						
71251-0005	BLACK	5.0 VOLT UNBUFFERED	OFFSET RIGHT	OFFSET LEFT	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.661}{(42.19)}$	$\frac{.125}{(3.18)}$	$\frac{.035}{(0.89)}$	$\frac{.102}{(2.59)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A						
71251-0006	BLACK	5.0 VOLT STD DRAM	CENTER	OFFSET LEFT	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A						
71251-0007	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.700}{(43.18)}$	$\frac{.140}{(3.56)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A						
71251-0008	BLACK	5.0 VOLT STD DRAM	CENTER	OFFSET LEFT	NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A						
71251-0009	BLACK	5.0 VOLT STD DRAM	CENTER	OFFSET LEFT	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.700}{(43.18)}$	$\frac{.125}{(3.18)}$	$\frac{.035}{(0.89)}$	$\frac{.102}{(2.59)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A						
71251-0010	BEIGE	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.700}{(43.18)}$	$\frac{.125}{(3.18)}$	$\frac{.035}{(0.89)}$	$\frac{.112}{(2.84)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A						
71251-0011	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A						
71251-0012	BLACK	3.3 VOLT UNBUFFERED	SEE SHEET 2																		OPTION A						
71251-0013	BLACK	5.0 VOLT UNBUFFERED	SEE SHEET 2																		OPTION A						
71251-0014	BLACK	3.3 VOLT UNBUFFERED	OFFSET RIGHT	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.661}{(42.19)}$	$\frac{.125}{(3.18)}$	$\frac{.035}{(0.89)}$	$\frac{.112}{(2.84)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A						
71251-0015	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.117}{(2.97)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A						
71251-0016	BLACK	3.3 VOLT SYNCHRONOUS	SEE SHEET 2																		OPTION A						
71251-0017	BLACK	5.0 VOLT SYNCHRONOUS	SEE SHEET 2																		OPTION A						
71251-0018	BLACK	3.3 VOLT UNBUFFERED	OFFSET RIGHT	CENTER	$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.661}{(42.19)}$	$\frac{.140}{(3.56)}$	$\frac{.035}{(0.89)}$	$\frac{.102}{(2.59)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A						
71251-0019	BLACK	5.0 VOLT STD DRAM	CENTER	OFFSET LEFT	NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		NONE		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION B						
71251-0020	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.700}{(43.18)}$	$\frac{.140}{(3.56)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION B						
71251-0021	BLACK	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.700}{(43.18)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION B						
71251-0022	BLACK	3.3 VOLT UNBUFFERED	OFFSET RIGHT	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.661}{(42.19)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION B						
71251-0023	BLACK	3.3 VOLT UNBUFFERED	OFFSET RIGHT	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.661}{(42.19)}$	$\frac{.125}{(3.18)}$	$\frac{.035}{(0.89)}$	$\frac{.102}{(2.59)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A						
71251-0024	BLACK	3.3 VOLT UNBUFFERED	OFFSET RIGHT	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{1.661}{(42.19)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.105}{(2.67)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A						
71251-0026	BEIGE	3.3 VOLT STD DRAM	CENTER	CENTER	$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		NONE		NONE		$\frac{.080 \pm .002}{(2.03 \pm 0.05)}$		$\frac{1.700}{(43.18)}$	$\frac{.125}{(3.18)}$	$\frac{.035}{(0.89)}$	$\frac{.090}{(2.29)}$	$\frac{.985}{(25.02)}$	$\frac{.128}{(3.25)}$	$\frac{.265}{(6.73)}$	$\frac{.425}{(10.79)}$	OPTION A						
71251-0027	BLACK	3.3 VOLT SYNCHRONOUS	OFFSET LEFT	CENTER	NONE		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		$\frac{.093 + .003/- .000}{(2.36+0.08/-0.00)}$		NONE		$\frac{1.739}{(44.17)}$	$\frac{.155}{(3.94)}$	$\frac{.020}{(0.51)}$	$\frac{.127}{(3.23)}$	$\frac{.970}{(24.64)}$	$\frac{.113}{(2.87)}$	$\frac{.250}{(6.35)}$	$\frac{.410}{(10.41)}$	OPTION A						
														DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES ANGULAR ± 1/2°				REVISE ONLY ON CAD SYSTEM									
														INCH METRIC				TITLE 050/(1.27) PITCH MULTI-KEY 168 CKT DIMM RAM ASSY 17.8mm LATCH SALES DWG.									
														3 PLACE ± .005 --- 2 PLACE ± .01 ± 0.13 1 PLACE --- ± 0.25				MOLEX INCORPORATED SHEET NO. 3 DATE 12/07/95 L15L,ILL. 60532 U.S.A.									
														DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				PART NO. SEE CHART DRWG. NO. SDA-71251-0***									
														DRWG. BY DCB CHK'D BY DCB SCALE 2:1				FILE NAME ST 25103 CP C									
														LTR. REVISIONS LTR. REVISIONS				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
I3		I2		I1		I0		9		8		7		6		5		4		3		2		1			