


AC SAFETY CAPACITORS

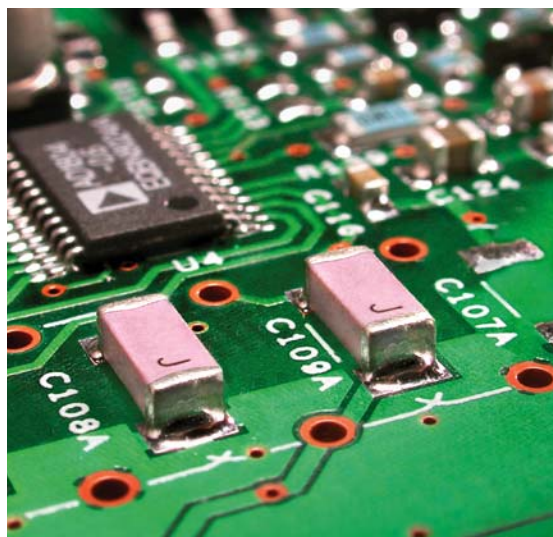


Johanson Dielectrics Type SC ceramic chip capacitors are designed for AC voltage surge and lightning protection in line-to-ground interface applications in computer networks, modem, facsimile and other equipment.

Johanson's safety capacitor offering includes four different case sizes and NPO and X7R dielectric materials.

These devices are surface mount ready with barrier terminations and tape and reel packaging.

Additional information on capacitor safety ratings may be found below. Specific certification details may be found under each product listing on the facing page.



Polyterm® soft termination option available for demanding environments & processes.

SAFETY RATING	VOLTAGE RATING	WITHSTANDING VOLTAGE	IMPULSE VOLTAGE	CASE SIZE	JOHANSON ORDERING P/N
X2/Y3	250 VAC	1,500 VAC	2,500 V	1808	302R29____V3E-****-SC
STANDARDS: EN 60384-14:2005, EN 60950 2001 • UL 60950-01 CERTIFICATIONS: TUV T72090022 & T72072987 • UL File E212609 • Semko 0026092-1 & 0003222-1					
Y3	250 VAC	1,500 VAC	2,500 V	1812	302S43____V3E-****-SC
STANDARDS: EN 60384-14:2005, EN 60950:2001 CERTIFICATIONS: TUV Rheinland T72072987					
X1/Y2	250 VAC	1,500 VAC	5,000 V	1808	502R29____V3E-****-SC
STANDARDS: EN 60384-14:2005 • UL 60950-01 CERTIFICATIONS: TUV Rheinland T72090023 & T72090024 / UL File E212609-A1-UL-1					
Y2	250 VAC	1,500 VAC	5,000 V	2211	502R30____V3E-****-SC
STANDARDS: EN 60384-14:2005 • UL 60950-01 CERTIFICATIONS: TUV Rheinland T72090024 • UL File: E212609-A1-UL-1					
X1/Y2	250 VAC	1,500 VAC	5,000 V	2220	502S47____V3E-****-SC
STANDARDS: EN 60384-14:2005 • UL 60950-01 CERTIFICATIONS: TUV Rheinland R72060014 • UL File: E212609-A1-UL-1					
Japan	250 VAC	1,500 VAC	N/A	2220	AC2____V4E-****-JS
STANDARDS: JIS-C-5102 • JIS-C-5150 CERTIFICATIONS: N/A					
X Capacitors are defined as suitable for use in situations where failure of the capacitor would not lead to danger of electric shock. Y Capacitors are defined as suitable for use in situations where failure of the capacitor could lead to danger of electric shock.					

HOW TO ORDER SAFETY CERTIFIED P/N written: 302R29N101KV3E-****-SC

502	R29	N	101	K	V	3	E - **** - SC
RATED VOLTAGE [IMPULSE VOLT.] 302 = 250VAC [3000V IMP.] 502 = 250VAC [5000V IMP.] AC2 = 250VAC [N/A]	CASE SIZE See Chart DIELECTRIC N = NPO/COG W = X7R	CAPACITANCE 1st two digits are significant; third digit denotes number of zeros; 101 = 100 pF	TOLERANCE NPO: J = ± 5% K = ± 10% X7R: K = ± 10% M = ± 20%	TERMINATION V = Ni barrier w/ 100% Sn Plating F = Polyterm flexible termination	MARKING 3 = Special (J) 4 = Unmarked	TAPE MODIFIER Code Tape Reel E Embossed 7" Tape specifications conform to EIA RS481	TYPE SC = Safety Certified JS = Japan Safety

SAFETY CERTIFIED

SAFETY CERTIFIED				5 pF	10 pF	12 pF	15 pF	18 pF	22 pF	27 pF	33 pF	47 pF	56 pF	68 pF	100 pF	120 pF	150 pF	180 pF	220 pF	270 pF	330 pF	470 pF	560 pF	680 pF	1000 pF	1200 pF	1500 pF	1800 pF	2200 pF	2700 pF	3300 pF	4700 pF	
R29 / 1808  X2/Y3	INCHES	(mm)																															
	L	.189 ±.010	(4.80 ±.25)																														
	W	.080 ±.010	(2.03 ±.25)																														
	T	.085 Max.	(2.16)																														
	E/B	.020 ±.010	(0.51±.25)																														
S43 / 1812  Y3	INCHES	(mm)																															
	L	.175 ±.010	(4.45 ±.25)																														
	W	.125 ±.010	(3.17 ±.25)																														
	T	.115 Max.	(2.92)																														
	E/B	.025 ±.015	(0.64±.38)																														
R29 / 1808  X1/Y2	INCHES	(mm)																															
	L	.189 ±.010	(4.80 ±.25)																														
	W	.080 ±.010	(2.03 ±.25)																														
	T	.085 Max.	(2.16)																														
	E/B	.012 ±.005	(0.30±.13)																														
R30 / 2211  Y2	INCHES	(mm)																															
	L	.225 ±.016	(5.72 ±.40)																														
	W	.110 ±.010	(2.80 ±.25)																														
	T	.115 Max.	(2.92)																														
	E/B	.020 ±.010	(0.51±.25)																														
S47 / 2220  X1/Y2	INCHES	(mm)																															
	L	.225 ±.015	(5.72 ±.38)																														
	W	.200 ±.015	(5.08 ±.38)																														
	T	.150 Max.	(3.81)																														
	E/B	.025 ±.015	(0.64±.38)																														

DIELECTRIC

NPO

X7R

DIELECTRIC	
	NPO
	X7R

JAPAN STANDARD

				470pF	1000pF	2200pF	3300pF	4700pF	0.01μF	0.022μF	0.047μF	0.10μF
J29 / 1808  Japan Safety	INCHES (mm)	L	.189 ±.010 (4.80 ±.25)									
		W	.080 ±.010 (2.03 ±.25)									
		T	.085 Max. (2.16)									
		E/B	.020 ±.010 (0.51±.25)									
J43 / 1812  Japan Safety	INCHES (mm)	L	.175 ±.010 (4.45 ±.25)									
		W	.125 ±.010 (3.17 ±.25)									
		T	.115 Max. (2.92)									
		E/B	.025 ±.015 (0.64±.38)									
J47 / 2220  Japan Safety	INCHES (mm)	L	.225 ±.015 (5.72 ±.38)									
		W	.200 ±.015 (5.08 ±.38)									
		T	.150 Max. (3.81)									
		E/B	.025 ±.015 (0.64±.38)									