



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
			E1	REVISED ECR-08-031766	08DEC08	SF	KB

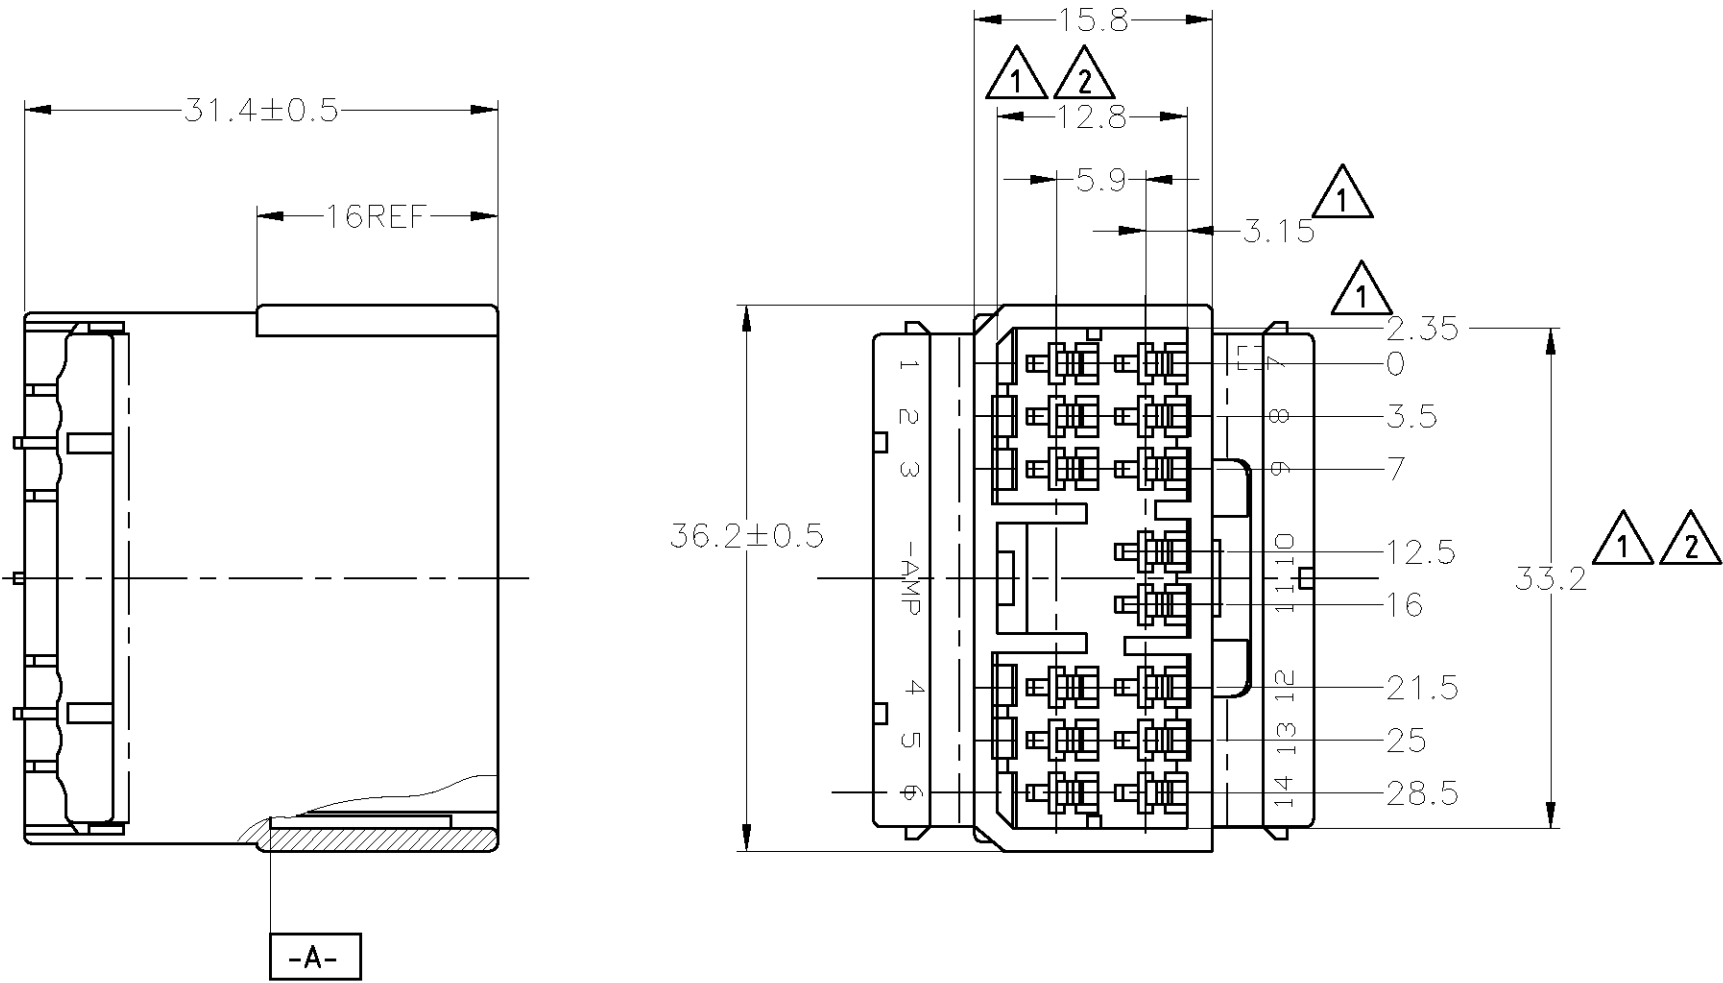

1. MUST BE KEPT BETWEEN **-A-** AND 2
2. TO BE MATED WITH PLUG HOUSING SMOOTHLY
3. APPLIED TAB CONTACT; P/N 173633 AND 173645
4. APPLIED PLUG HOUSING; P/N 173852 etc
1. **-A-** 面より2mmの範囲で測定
2. 相手ハウジングと所定の機能を満足して嵌合できること
3. 内装するタブコンタクトは型番173633、173645
4. 嵌合相手ハウジング型番173852 他

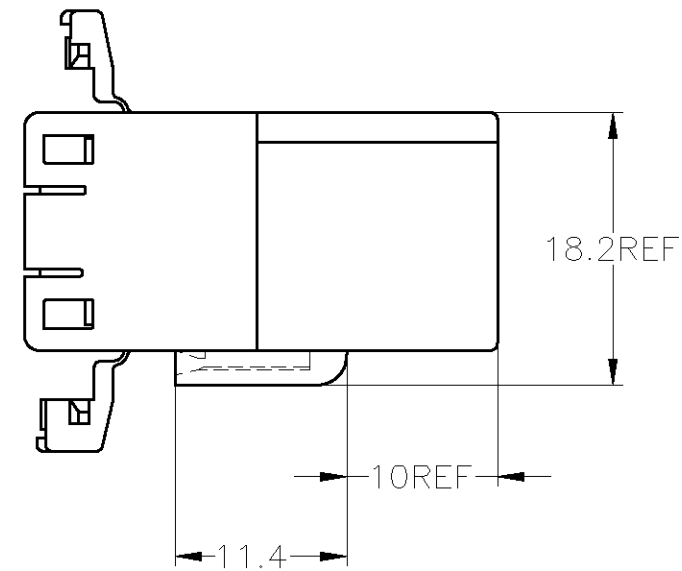

V-2	白 (WHITE)	1-174934-1
HB	黄 (YELLOW)	174934-7
	灰 (GRAY)	174934-6
	青 (BLUE)	174934-5
	緑 (GREEN)	174934-4
	黒 (BLACK)	174934-2
	白 (WHITE)	174934-1
	使用材料難燃グレード (FLAMMABILITY OF MATERIAL)	色 (COLOR)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.FUJITA 08DEC08	Tyco Electronics Corporation Kawasaki, Japan			
DIMENSIONS: mm		CHK K.BETSUI 08DEC08				
		APVD K.BETSUI 08DEC08	NAME 070 SERIES MULTILOCK I/O CONNECTOR 14POSITION CAP HOUSING WIRE TO WIRE			
		PRODUCT SPEC —	SIZE A300779			
MATERIAL PBT		APPLICATION SPEC —	DRAWING NO C-174934			
		WEIGHT —	RESTRICTED TO —			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1	REV E1