


SPECIFICATION CONTROL DRAWING

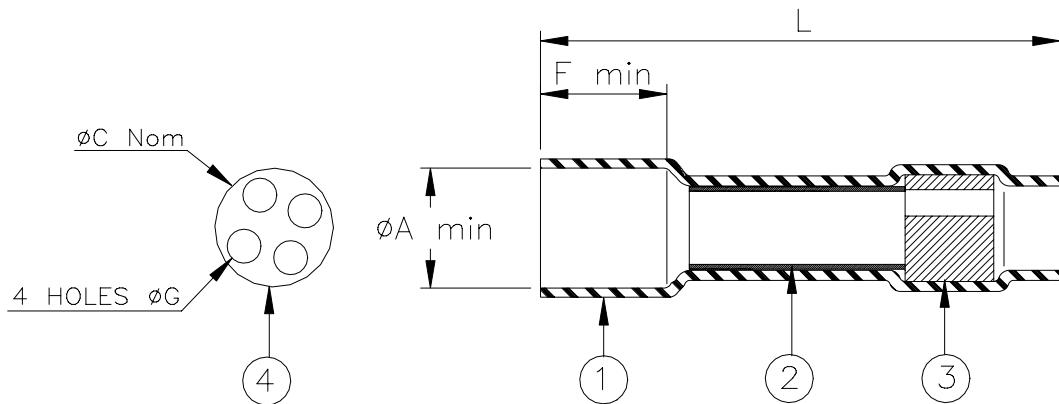

Product Revision		Product Dimensions				
Product Name		L max	φA min	φC nom	φG min	F min
D-436-40	A	63.2 (2.490)	12.0 (0.475)	11.8 (0.465)	3.95 (0.155)	16.5 (0.650)


MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. MELTABLE LINER: Modified thermoplastic.
3. INTEGRAL MULTI-WIRE SEAL: Low outgassing immersion resistant thermoplastic. Color: yellow.
4. SEPARATE MULTI-WIRE SEAL: Low outgassing immersion resistant thermoplastic. Color: yellow.

APPLICATION

1. This part is designed to provide an immersion resistant seal on in-line splices made with wires having insulations rated for at least 135°C.
2. Part will seal assemblies which require insertion of no more than two wires per hole of the multi-hole inserts.
3. For assembly instruction, see Raychem Installation Procedure RPIP-826-00.

For best results, prepare the cable as shown:



* A trademark of Raychem Corporation.

Raychem	THERMOFIT DEVICES	Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA	TITLE: MULTI-CONDUCTOR SEALING SLEEVE, LOW OUTGASSING		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.		DOCUMENT NO.: D-436-40			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	DCR NUMBER: D981041	REPLACES: D43640	
DRAWN BY: M. FORONDA	DATE: 06/23/98	PROD. REV. SEE TABLE	DOC ISSUE: 1	SCALE: None	SIZE: A SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check for the latest revision

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[D-436-40](#)