



#### ■ Features :

- Constant voltage design
- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- Protections: Short circuit / Over load / Over voltage
- Cooling by free air convection
- Small and compact size
- Fully encapsulated with IP67 level (Note.7)
- Fully isolated plastic case
- Class II power unit, no FG
- Class 2 power unit
- Pass LPS
- Suitable for LED lighting and moving sign applications
- 100% full load burn-in test
- Low cost, high reliability
- 2 years warranty


#### SPECIFICATION




| MODEL        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | LPV-20-5                                                                                                                | LPV-20-12  | LPV-20-15  | LPV-20-24                                                                   |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|------------|------------|-----------------------------------------------------------------------------|
| OUTPUT       | DC VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 5V                                                                                                                      | 12V        | 15V        | 24V                                                                         |
|              | RATED CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 3A                                                                                                                      | 1.67A      | 1.33A      | 0.84A                                                                       |
|              | CURRENT RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 0 ~ 3A                                                                                                                  | 0 ~ 1.67A  | 0 ~ 1.33A  | 0 ~ 0.84A                                                                   |
|              | RATED POWER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 15W                                                                                                                     | 20W        | 20W        | 20.2W                                                                       |
|              | RIPPLE & NOISE (max.) <small>Note.2</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 80mVp-p                                                                                                                 | 120mVp-p   | 120mVp-p   | 150mVp-p                                                                    |
|              | VOLTAGE TOLERANCE <small>Note.3</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | ±5.0%                                                                                                                   |            |            |                                                                             |
|              | LINE REGULATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | ±1.0%                                                                                                                   |            |            |                                                                             |
|              | LOAD REGULATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | ±2.0%                                                                                                                   |            |            |                                                                             |
|              | SETUP, RISE TIME <small>Note.6</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 500ms, 20ms / 230VAC    500ms, 20ms / 115VAC at full load                                                               |            |            |                                                                             |
|              | HOLD UP TIME (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 50ms/230VAC    16ms/115VAC at full load                                                                                 |            |            |                                                                             |
| INPUT        | VOLTAGE RANGE <small>Note.4</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 90 ~ 264VAC    127 ~ 370VDC                                                                                             |            |            |                                                                             |
|              | FREQUENCY RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 47 ~ 63Hz                                                                                                               |            |            |                                                                             |
|              | EFFICIENCY (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 77%                                                                                                                     | 81%        | 83%        | 83%                                                                         |
|              | AC CURRENT (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0.55A/115VAC    0.35A/230VAC                                                                                            |            |            |                                                                             |
|              | INRUSH CURRENT(max.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | COLD START 35A/115VAC    70A/230VAC                                                                                     |            |            |                                                                             |
|              | LEAKAGE CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 0.25mA / 240VAC                                                                                                         |            |            |                                                                             |
| PROTECTION   | OVER LOAD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 110 ~ 150% rated output power<br>Protection type : Hiccup mode, recovers automatically after fault condition is removed |            |            |                                                                             |
|              | OVER VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 5.75 ~ 6.75V                                                                                                            | 13.8 ~ 16V | 17.5 ~ 21V | 28 ~ 32V<br>Protection type : Shut off o/p voltage, clamping by zener diode |
| ENVIRONMENT  | WORKING TEMP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | -30 ~ +70°C (Refer to "Derating Curve")                                                                                 |            |            |                                                                             |
|              | WORKING HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 20 ~ 90% RH non-condensing                                                                                              |            |            |                                                                             |
|              | STORAGE TEMP., HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | -40 ~ +80°C, 10 ~ 95% RH                                                                                                |            |            |                                                                             |
|              | TEMP. COEFFICIENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | ±0.03%/°C (0 ~ 50°C)                                                                                                    |            |            |                                                                             |
|              | VIBRATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes                                                 |            |            |                                                                             |
| SAFETY & EMC | SAFETY STANDARDS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | UL879, UL1310, CSA C22.2 No. 207-M89, CAN/CSA C22.2 No. 223-M91, IP67 approved ; design refer to TUV EN60950-1          |            |            |                                                                             |
|              | WITHSTAND VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | I/P-O/P:3KVAC                                                                                                           |            |            |                                                                             |
|              | ISOLATION RESISTANCE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | I/P-O/P:>100M Ohms / 500VDC / 25°C/ 70% RH                                                                              |            |            |                                                                             |
|              | EMC EMISSION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Compliance to EN55022 (CISPR22) Class B, EN61000-3-2 Class A, EN61000-3-3                                               |            |            |                                                                             |
|              | EMC IMMUNITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, light industry level, criteria A                                       |            |            |                                                                             |
| OTHERS       | MTBF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 786.5Khrs min.    MIL-HDBK-217F (25°C)                                                                                  |            |            |                                                                             |
|              | DIMENSION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 118*35*26mm (L*W*H)                                                                                                     |            |            |                                                                             |
|              | PACKING                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 0.22Kg; 60pcs/14.2Kg/0.62CUFT                                                                                           |            |            |                                                                             |
| NOTE         | 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.<br>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.<br>3. Tolerance : includes set up tolerance, line regulation and load regulation.<br>4. Derating may be needed under low input voltage. Please check the static characteristics for more details.<br>5. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.<br>6. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time.<br>7. Suitable for indoor use or outdoor use without direct sunlight exposure. Please avoid immerse in the water over 30 minute.<br>8. The unit might not be suitable for lighting applications in EU countries. Please check with your local authorities for the possible use of the unit. |                                                                                                                         |            |            |                                                                             |

### Mechanical Specification


Case No. 972A Unit:mm

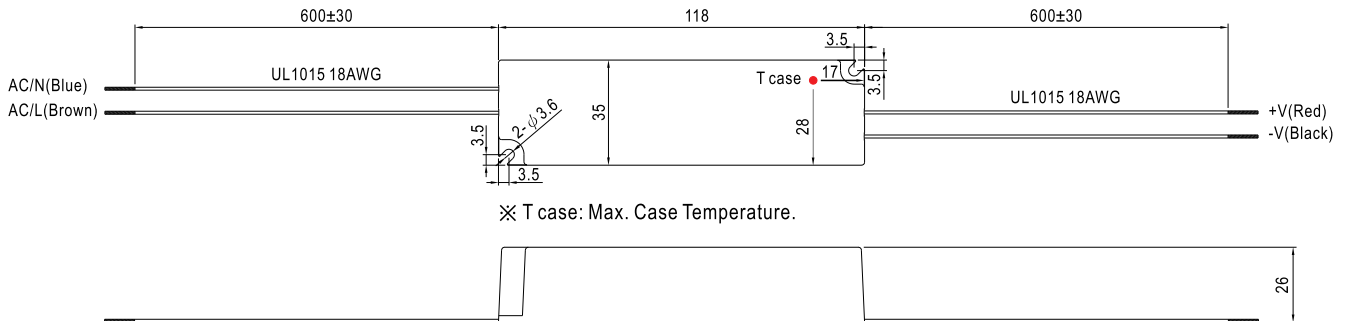


### Recommend Mounting Direction



### Block Diagram

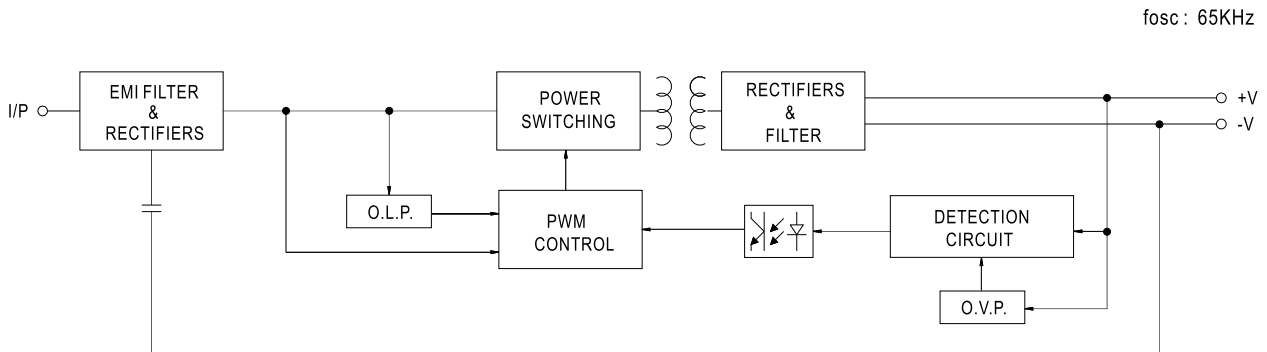

### Derating Curve

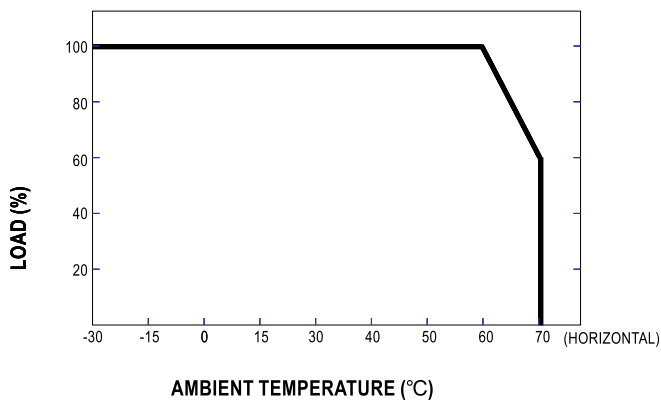

### Static Characteristics

