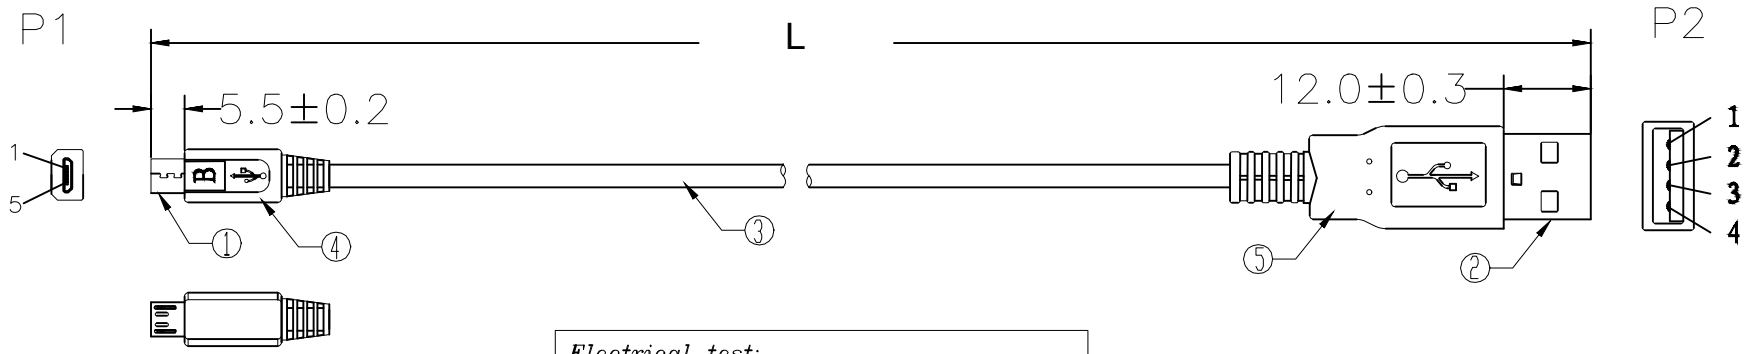

Electrical test:
1.100% short,open,miswire test
2.Conduct resistance:2 Ohm(max)
3.Insulation resistance:10Mohm(min)
4.dielectric test:DC 300V

WSW P/N	L
AK67421-0.5-R	500±15
AK67421-1-R	1000±20
AK67421-2-R	2000±20
AK67421-3-R	3000±30
AK67421-5-R	5000±50

PIN ASSIGNMENT

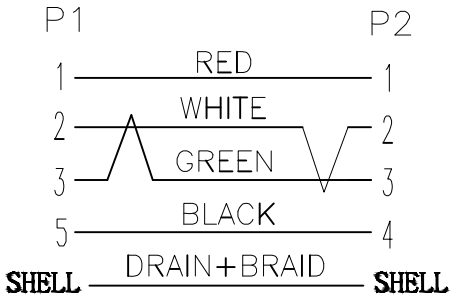

NO.	NAME	Q'TY	SPECIFICATION
⑧	TIE	1	BLACK L=80mm
⑦	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑥	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑤	OUT JACKET	6g	BLACK PVC-40P (MOULD NO:WM-40)
④	OUT JACKET	6g	BLACK PVC-40P (MOULD NO:WM-116)
③	CABLE	1	USB2.0 UL2725 [28AWG(7/0.12TC+AL)*1P+28AWG(7/0.12TC)*2C]+AEB(48B TC) JACKET:BLACK OD:3.5mm
②	CONN	1set	USB A MALE SHELL:NICKEL PIN:G/F 3PCS TYPE INSULATOR COLOR:WHITE
①	CONN	1	MICRO USB 5P B/M SOLDER TYPE SHELL:NICKEL PIN:G/F INSULATOR COLOR:BLACK

RoHS compliant
Unit:mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE					Drawn	10.04.2013	Joanna	
					Approved	10.04.2013	Joanna	ASSMANN WSW-No. AK67421-X-R
DIM	TOL							Drawing-No. ASS 7091 CA rev00
		⓪	Drawn	10.04.2013	Joanna			
Angle	TOL	Id.	Modification	Date	Name			Replace / Sheet

ASSMANN WSW components