
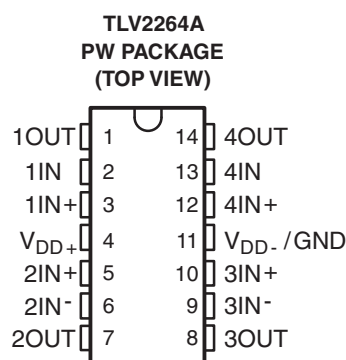


Advanced LinCMOS™ RAIL-TO-RAIL OPERATIONAL AMPLIFIERS

FEATURES

- Qualified for Automotive Applications
- Output Swing Includes Both Supply Rails
- Low Noise . . . 12 nV/√Hz Typ at f = 1 kHz
- Low Input Bias Current . . . 1 pA Typ
- Fully Specified for Both Single-Supply and Split-Supply Operation
- Low Power . . . 500 μA Max
- Common-Mode Input Voltage Range Includes Negative Rail
- Low Input Offset Voltage . . . 950 μV Max at T_A = 25°C
- Wide Supply Voltage Range . . . 2.7 V to 8 V
- Macromodel Included




DESCRIPTION

The TLV2262 and TLV2264 are dual and quad low voltage operational amplifiers from Texas Instruments. Both devices exhibit rail-to-rail output performance for increased dynamic range in single or split supply applications. The TLV226x family offers a compromise between the micropower TLV225x and the ac performance of the TLC227x. It has low supply current for battery-powered applications, while still having adequate ac performance for applications that demand it. This family is fully characterized at 3 V and 5 V and is optimized for low-voltage applications. The noise performance has been dramatically improved over previous generations of CMOS amplifiers. Figure 1 depicts the low level of noise voltage for this CMOS amplifier, which has only 200 μA (typ) of supply current per amplifier.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Advanced LinCMOS is a trademark of Texas Instruments.
Parts, PSpice are trademarks of MicroSim Corporation.

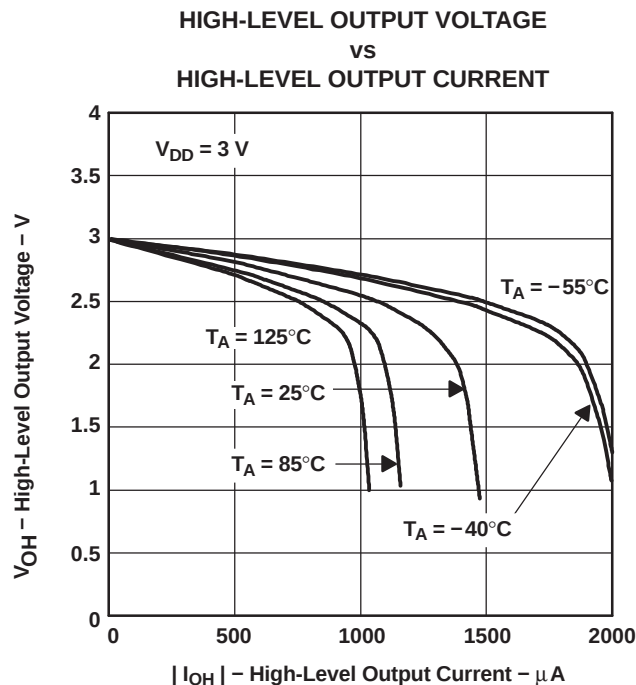

The TLV226x, exhibiting high input impedance and low noise, are excellent for small-signal conditioning for high-impedance sources, such as piezoelectric transducers. Because of the micropower dissipation levels combined with 3-V operation, these devices work well in hand-held monitoring and remote-sensing applications. In addition, the rail-to-rail output feature with single or split supplies makes this family a great choice when interfacing with analog-to-digital converters (ADCs). For precision applications, the TLV226xA family is available and has a maximum input offset voltage of 950 μ V.

The TLV2262/4 also makes great upgrades to the TLV2332/4 in standard designs. They offer increased output dynamic range, lower noise voltage and lower input offset voltage. This enhanced feature set allows them to be used in a wider range of applications. For applications that require higher output drive and wider input voltage range, see the TLV2432 and TLV2442 devices. If your design requires single amplifiers, please see the TLV2211/21/31 family. These devices are single rail-to-rail operational amplifiers in the SOT-23 package. Their small size and low power consumption make them ideal for high density, battery-powered equipment.

ORDERING INFORMATION⁽¹⁾

T_A	PACKAGE ⁽²⁾		ORDERABLE PART NUMBER	TOP-SIDE MARKING
-40°C to 125°C	TSSOP – PW (8 pin)	Reel of 2000	TLV2262AQPWRQ1	TQ262A
	TSSOP – PW (14 pin)	Reel of 2000	TLV2264AQPWRQ1	P2264AQ

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.

(2) Package drawings, thermal data, and symbolization are available at www.ti.com/packaging.

EQUIVALENT SCHEMATIC (EACH AMPLIFIER)

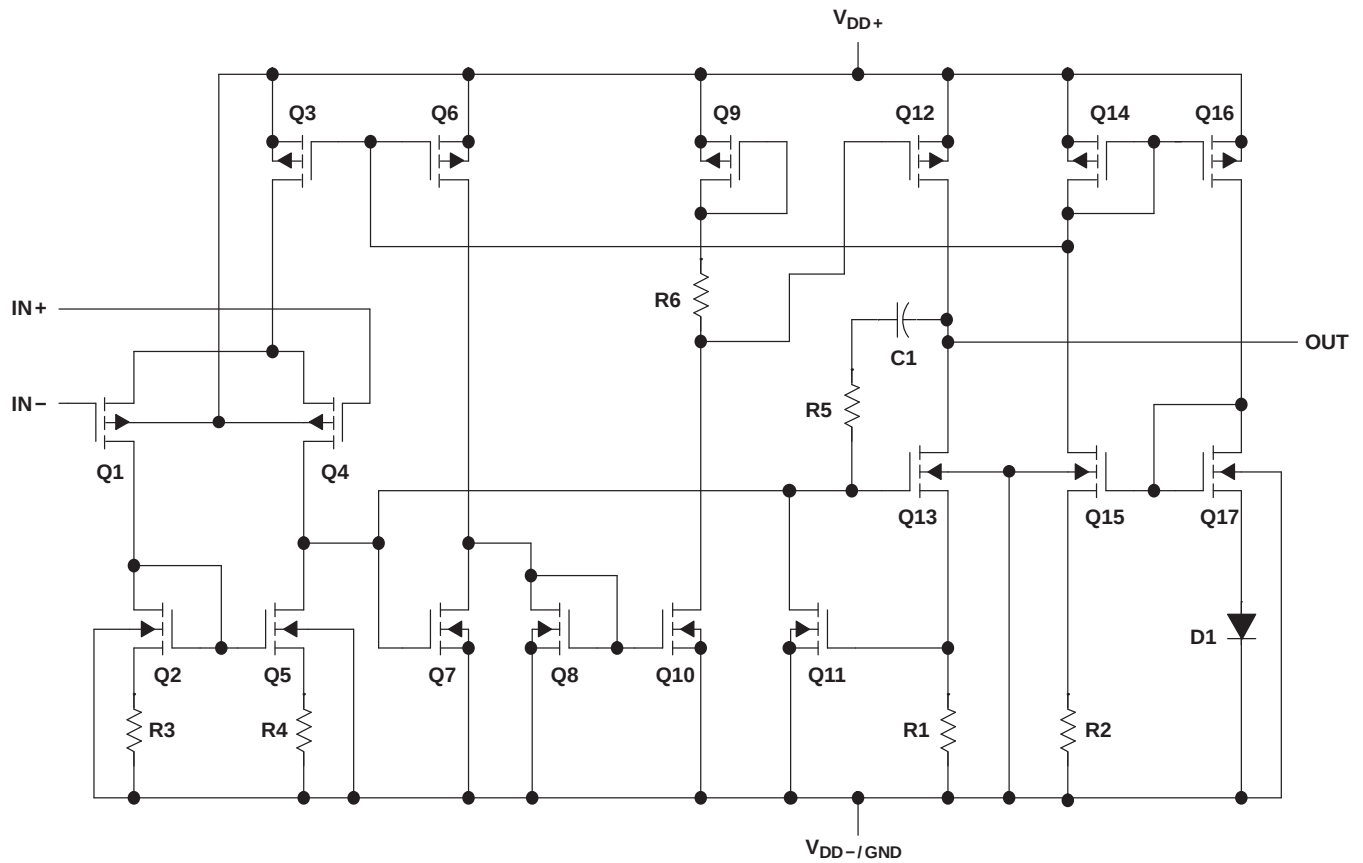


Table 1. Actual Device Component Count

COMPONENT	TLV2262	TLV2264
Transistors	38	76
Resistors	28	54
Diodes	9	18
Capacitors	3	6

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

V_{DD}	Supply voltage ⁽²⁾	–0.3 V to 16 V
V_{ID}	Differential input voltage ⁽³⁾	$\pm V_{DD}$
V_I	Input voltage range	$(V_{DD-} - 0.3 \text{ V})$ to V_{DD+}
I_I	Input current, any input	$\pm 5 \text{ mA}$
I_O	Output current	$\pm 50 \text{ mA}$
	Total current into V_{DD+}	$\pm 50 \text{ mA}$
	Total current out of V_{DD-}	$\pm 50 \text{ mA}$
	Duration of short-circuit current (at or below) 25°C ⁽⁴⁾	Unlimited
P_D	Continuous total power dissipation	See Dissipation Rating Table
T_A	Operating free-air temperature range	–40°C to 125°C
T_{stg}	Storage temperature range	–65°C to 150°C

- (1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values, except differential voltages, are with respect to V_{DD-} .
- (3) Differential voltages are at the noninverting input with respect to the inverting input. Excessive current flows when input is brought below $V_{DD-} - 0.3 \text{ V}$.
- (4) The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure that the maximum dissipation rating is not exceeded.

DISSIPATION RATINGS

PACKAGE	$T_A \leq 25^\circ\text{C}$ POWER RATING	DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$	$T_A = 85^\circ\text{C}$ POWER RATING	$T_A = 125^\circ\text{C}$ POWER RATING
PW-8	525 mW	4.2 mW/°C	273 mW	105 mW
PW-14	700 mW	5.6 mW/°C	364 mW	140 mW

RECOMMENDED OPERATING CONDITIONS

	MIN	MAX	UNIT
$V_{DD\pm}$ Supply voltage ⁽¹⁾	2.7	8	V
V_I Input voltage	V_{DD-}	$V_{DD+} - 1.3$	V
V_{IC} Common-mode input voltage	V_{DD-}	$V_{DD+} - 1.3$	V
T_A Operating free-air temperature	–40	125	°C

- (1) All voltage values, except differential voltages, are with respect to V_{DD-} .

TLV2262A ELECTRICAL CHARACTERISTICS
 $V_{DD} = 3\text{ V}$, over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T_A	MIN	TYP	MAX	UNIT
V_{IO}	Input offset voltage	$V_{DD\pm} = \pm 1.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$		25°C		300	950	mV
				Full range			1500	
α_{VIO}	Temperature coefficient of input offset voltage	$V_{DD\pm} = \pm 1.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$		25°C to 125°C		2		$\mu\text{V}/^\circ\text{C}$
	Input offset voltage long-term drift ⁽¹⁾	$V_{DD\pm} = \pm 1.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$		25°C		0.003		$\mu\text{V}/\text{mo}$
I_{IO}	Input offset current	$V_{DD\pm} = \pm 1.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$		25°C		0.5	60	pA
				125°C			800	
I_{IB}	Input bias current	$V_{DD\pm} = \pm 1.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$		25°C		1	60	pA
				125°C			800	
V_{ICR}	Common-mode input voltage range	$R_S = 50\ \Omega$, $ V_{IO} \leq 5\text{ mV}$		25°C	0 to 2	–0.3 to 2.2		V
				Full range	0 to 1.7			
V_{OH}	High-level output voltage	$I_{OH} = -20\ \mu\text{A}$ $I_{OH} = -100\ \mu\text{A}$ $I_{OH} = -400\ \mu\text{A}$		25°C		2.99		V
				25°C		2.85		
				Full range		2.82		
				25°C		2.7		
V_{OL}	Low-level output voltage	$V_{IC} = 1.5\text{ V}$		25°C		10		mV
				25°C		100	150	
				Full range			165	
				25°C		200	300	
A_{VD}	Large-signal differential voltage amplification	$V_{IC} = 1.5\text{ V}$, $V_O = 1\text{ V to }2\text{ V}$	$R_L = 50\text{ k}\Omega^{(2)}$ $R_L = 1\text{ M}\Omega^{(2)}$	25°C		60	100	V/mV
				Full range		25		
				25°C		100		
				Full range			300	
$r_{i(d)}$	Differential input resistance			25°C		10^{12}		Ω
$r_{i(c)}$	Common-mode input resistance			25°C		10^{12}		Ω
$C_{i(c)}$	Common-mode input capacitance	$f = 10\text{ kHz}$		25°C		8		pF
Z_o	Closed-loop output impedance	$f = 100\text{ kHz}$, $A_V = 10$		25°C		270		Ω
CMRR	Common-mode rejection ratio	$V_{IC} = 0\text{ to }1.7\text{ V}$, $V_O = 1.5\text{ V}$, $R_S = 50\ \Omega$		25°C		65	77	dB
				Full range		60		
k_{SVR}	Supply voltage rejection ratio ($\Delta V_{DD}/\Delta V_{IO}$)	$V_{DD} = 2.7\text{ V to }8\text{ V}$, $V_{IC} = V_{DD}/2$, No load		25°C		80	100	dB
				Full range		80		
I_{DD}	Supply current	$V_O = 1.5\text{ V}$, No load		25°C		400	500	μA
				Full range			500	

(1) Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at $T_A = 150^\circ\text{C}$ extrapolated to $T_A = 25^\circ\text{C}$ using the Arrhenius equation and assuming an activation energy of 0.96 eV.

(2) Referenced to 1.5 V

TLV2262A OPERATING CHARACTERISTICSV_{DD} = 3 V, over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T _A	MIN	TYP	MAX	UNIT
SR	Slew rate at unity gain	V _O = 0.5 V to 1.7 V, R _L = 50 kΩ ⁽¹⁾ , C _L = 100 pF ⁽¹⁾	25°C	0.35	0.55		V/μs
			Full range	0.25			
V _n	Equivalent input noise voltage	f = 10 Hz	25°C		43		nV/√Hz
		f = 1 kHz	25°C		12		
V _{N(PP)}	Peak-to-peak equivalent input noise voltage	f = 0.1 Hz to 1 Hz	25°C		0.6		μV
		f = 0.1 Hz to 10 Hz	25°C		1		
I _n	Equivalent input noise current		25°C		0.6		fA/√Hz
THD+N	Total harmonic distortion plus noise	V _O = 0.5 V to 2.5 V, f = 20 kHz, R _L = 50 kΩ ⁽¹⁾	A _V = 1 25°C		0.03		%
			A _V = 10 25°C		0.05		
	Gain-bandwidth product	f = 1 kHz, R _L = 50 kΩ ⁽¹⁾ , C _L = 100 pF ⁽¹⁾	25°C		0.67		MHz
B _{OM}	Maximum output-swing bandwidth	V _{O(PP)} = 1 V, A _V = 1, R _L = 50 kΩ ⁽¹⁾ , C _L = 100 pF ⁽¹⁾	25°C		395		kHz
t _s	Settling time	A _V = –1, Step = 1 V to 2 V, R _L = 50 kΩ ⁽¹⁾ , C _L = 100 pF ⁽¹⁾	To 0.1% 25°C		5.6		μs
			To 0.01% 25°C		12.5		
φ _m	Phase margin at unity gain	R _L = 50 kΩ ⁽¹⁾ , C _L = 100 pF ⁽¹⁾	25°C		55		°
G _m	Gain margin	R _L = 50 kΩ ⁽¹⁾ , C _L = 100 pF ⁽¹⁾	25°C		11		dB

(1) Referenced to 1.5 V

TLV2262A ELECTRICAL CHARACTERISTICS

 $V_{DD} = 5\text{ V}$, over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T_A	MIN	TYP	MAX	UNIT
V_{IO}	Input offset voltage	$V_{DD\pm} = \pm 2.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$	25°C		300	950	mV
			Full range			1500	
α_{VIO}	Temperature coefficient of input offset voltage	$V_{DD\pm} = \pm 2.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$	25°C to 125°C		2		$\mu\text{V}/^\circ\text{C}$
	Input offset voltage long-term drift ⁽¹⁾	$V_{DD\pm} = \pm 2.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$	25°C		0.003		$\mu\text{V}/\text{mo}$
I_{IO}	Input offset current	$V_{DD\pm} = \pm 2.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$	25°C		0.5	60	pA
			125°C			800	
I_{IB}	Input bias current	$V_{DD\pm} = \pm 2.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$	25°C		1	60	pA
			125°C			800	
V_{ICR}	Common-mode input voltage range	$R_S = 50\ \Omega$, $ V_{IO} \leq 5\text{ mV}$	25°C	0 to 4	–0.3 to 4.2		V
			Full range	0 to 3.5			
V_{OH}	High-level output voltage	$I_{OH} = -20\ \mu\text{A}$	25°C		4.99		V
			25°C	4.85	4.94		
		$I_{OH} = -100\ \mu\text{A}$	Full range	4.82			
			25°C	4.7	4.85		
V_{OL}	Low-level output voltage	$I_{OL} = -400\ \mu\text{A}$	Full range	4.5			V
			25°C		0.01		
		$I_{OL} = 500\ \mu\text{A}$	25°C		0.09	0.15	
			Full range			0.15	
A_{VD}	Large-signal differential voltage amplification	$V_{IC} = 2.5\text{ V}$	25°C		0.2	0.3	V
			Full range			0.3	
		$I_{OL} = 1\text{ mA}$	25°C				
			Full range				
$r_{i(d)}$	Differential input resistance	$V_{IC} = 2.5\text{ V}$, $V_O = 1\text{ V to }4\text{ V}$	25°C		80	170	V/mV
			Full range		50		
			25°C		550		
$r_{i(c)}$	Common-mode input resistance		25°C		10^{12}		Ω
$r_{i(c)}$	Common-mode input resistance		25°C		10^{12}		Ω
$C_{i(c)}$	Common-mode input capacitance	$f = 10\text{ kHz}$	25°C		8		pF
Z_o	Closed-loop output impedance	$f = 100\text{ kHz}$, $A_V = 10$	25°C		240		Ω
CMRR	Common-mode rejection ratio	$V_{IC} = 0\text{ to }2.7\text{ V}$, $V_O = 2.5\text{ V}$, $R_S = 50\ \Omega$	25°C	70	83		dB
			Full range	70			
k_{SVR}	Supply voltage rejection ratio ($\Delta V_{DD}/\Delta V_{IO}$)	$V_{DD} = 4.4\text{ V to }8\text{ V}$, $V_{IC} = V_{DD}/2$, No load	25°C	80	95		dB
			Full range	80			
I_{DD}	Supply current	$V_O = 2.5\text{ V}$, No load	25°C		400	500	μA
			Full range			500	

(1) Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at $T_A = 150^\circ\text{C}$ extrapolated to $T_A = 25^\circ\text{C}$ using the Arrhenius equation and assuming an activation energy of 0.96 eV.

(2) Referenced to 2.5 V

TLV2262A OPERATING CHARACTERISTICS

$V_{DD} = 5\text{ V}$, over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T_A	MIN	TYP	MAX	UNIT
SR	Slew rate at unity gain	$V_O = 0.5\text{ V to }3.5\text{ V}$, $R_L = 50\text{ k}\Omega^{(1)}$, $C_L = 100\text{ pF}^{(1)}$		25°C	0.35	0.55		V/ μs
				Full range	0.25			
V_n	Equivalent input noise voltage	$f = 10\text{ Hz}$		25°C		40		nV/ $\sqrt{\text{Hz}}$
		$f = 1\text{ kHz}$		25°C		12		
$V_{N(PP)}$	Peak-to-peak equivalent input noise voltage	$f = 0.1\text{ Hz to }1\text{ Hz}$		25°C		0.7		μV
		$f = 0.1\text{ Hz to }10\text{ Hz}$		25°C		1.3		
I_n	Equivalent input noise current			25°C		0.6		fA/ $\sqrt{\text{Hz}}$
THD+N	Total harmonic distortion plus noise	$V_O = 0.5\text{ V to }2.5\text{ V}$, $f = 20\text{ kHz}$, $R_L = 50\text{ k}\Omega^{(1)}$	$A_V = 1$	25°C		0.017		%
			$A_V = 10$	25°C		0.03		
	Gain-bandwidth product	$f = 50\text{ kHz}$, $R_L = 50\text{ k}\Omega^{(1)}$, $C_L = 100\text{ pF}^{(1)}$		25°C		0.71		MHz
B_{OM}	Maximum output-swing bandwidth	$V_{O(PP)} = 2\text{ V}$, $A_V = 1$, $R_L = 50\text{ k}\Omega^{(1)}$, $C_L = 100\text{ pF}^{(1)}$		25°C		185		kHz
t_s	Settling time	$A_V = -1$, Step = $0.5\text{ V to }2.5\text{ V}$, $R_L = 50\text{ k}\Omega^{(1)}$, $C_L = 100\text{ pF}^{(1)}$	To 0.1%	25°C		6.4		μs
			To 0.01%	25°C		14.1		
ϕ_m	Phase margin at unity gain	$R_L = 50\text{ k}\Omega^{(1)}$, $C_L = 100\text{ pF}^{(1)}$		25°C		56		°
G_m	Gain margin	$R_L = 50\text{ k}\Omega^{(1)}$, $C_L = 100\text{ pF}^{(1)}$		25°C		11		dB

(1) Referenced to 2.5 V

TLV2264A ELECTRICAL CHARACTERISTICS

 $V_{DD} = 3\text{ V}$, over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T_A	MIN	TYP	MAX	UNIT
V_{IO}	Input offset voltage	$V_{DD\pm} = \pm 1.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$		25°C		300	950	mV
				Full range			1500	
α_{VIO}	Temperature coefficient of input offset voltage	$V_{DD\pm} = \pm 1.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$		25°C to 125°C		2		$\mu\text{V}/^\circ\text{C}$
	Input offset voltage long-term drift ⁽¹⁾	$V_{DD\pm} = \pm 1.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$		25°C		0.003		$\mu\text{V}/\text{mo}$
I_{IO}	Input offset current	$V_{DD\pm} = \pm 1.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$		25°C		0.5	60	pA
				125°C			800	
I_{IB}	Input bias current	$V_{DD\pm} = \pm 1.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$		25°C		1	60	pA
				125°C			800	
V_{ICR}	Common-mode input voltage range	$R_S = 50\ \Omega$, $ V_{IO} \leq 5\text{ mV}$		25°C	0 to 2	–0.3 to 2.2		V
				Full range	0 to 1.7			
V_{OH}	High-level output voltage	$I_{OH} = -20\ \mu\text{A}$ $I_{OH} = -100\ \mu\text{A}$ $I_{OH} = -400\ \mu\text{A}$		25°C		2.99		V
				25°C		2.85		
				Full range		2.82		
				25°C		2.7		
V_{OL}	Low-level output voltage	$V_{IC} = 1.5\text{ V}$		25°C		10		mV
				25°C		100	150	
				Full range			150	
				25°C		200	300	
A_{VD}	Large-signal differential voltage amplification	$V_{IC} = 1.5\text{ V}$, $V_O = 1\text{ V to }2\text{ V}$	$R_L = 50\text{ k}\Omega^{(2)}$ $R_L = 1\text{ M}\Omega^{(2)}$	25°C		60	100	V/mV
				Full range		25		
				25°C		100		
				Full range			300	
$r_{i(d)}$	Differential input resistance			25°C		10^{12}		Ω
$r_{i(c)}$	Common-mode input resistance			25°C		10^{12}		Ω
$C_{i(c)}$	Common-mode input capacitance	$f = 10\text{ kHz}$		25°C		8		pF
Z_o	Closed-loop output impedance	$f = 100\text{ kHz}$, $A_V = 10$		25°C		270		Ω
CMRR	Common-mode rejection ratio	$V_{IC} = 0\text{ to }1.7\text{ V}$, $V_O = 1.5\text{ V}$, $R_S = 50\ \Omega$		25°C		65	77	dB
				Full range		60		
k_{SVR}	Supply voltage rejection ratio ($\Delta V_{DD}/\Delta V_{IO}$)	$V_{DD} = 2.7\text{ V to }8\text{ V}$, $V_{IC} = V_{DD}/2$, No load		25°C		80	100	dB
				Full range		80		
I_{DD}	Supply current	$V_O = 1.5\text{ V}$, No load		25°C		0.8	1	mA
				Full range			1	

(1) Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at $T_A = 150^\circ\text{C}$ extrapolated to $T_A = 25^\circ\text{C}$ using the Arrhenius equation and assuming an activation energy of 0.96 eV.

(2) Referenced to 1.5 V

TLV2264A OPERATING CHARACTERISTICS

$V_{DD} = 3\text{ V}$, over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T_A	MIN	TYP	MAX	UNIT
SR	Slew rate at unity gain	$V_O = 0.5\text{ V to }1.7\text{ V}$, $R_L = 50\text{ k}\Omega^{(1)}$, $C_L = 100\text{ pF}^{(1)}$	25°C	0.35	0.55		V/ μs
			Full range	0.25			
V_n	Equivalent input noise voltage	$f = 10\text{ Hz}$	25°C		43		nV/ $\sqrt{\text{Hz}}$
		$f = 1\text{ kHz}$	25°C		12		
$V_{N(PP)}$	Peak-to-peak equivalent input noise voltage	$f = 0.1\text{ Hz to }1\text{ Hz}$	25°C		0.6		μV
		$f = 0.1\text{ Hz to }10\text{ Hz}$	25°C		1		
I_n	Equivalent input noise current		25°C		0.6		fA/ $\sqrt{\text{Hz}}$
THD+N	Total harmonic distortion plus noise	$V_O = 0.5\text{ V to }2.5\text{ V}$, $f = 20\text{ kHz}$, $R_L = 50\text{ k}\Omega^{(1)}$	$A_V = 1$	25°C	0.03		%
			$A_V = 10$	25°C	0.05		
	Gain-bandwidth product	$f = 1\text{ kHz}$, $R_L = 50\text{ k}\Omega^{(1)}$, $C_L = 100\text{ pF}^{(1)}$	25°C		0.67		MHz
B_{OM}	Maximum output-swing bandwidth	$V_{O(PP)} = 1\text{ V}$, $A_V = 1$, $R_L = 50\text{ k}\Omega^{(1)}$, $C_L = 100\text{ pF}^{(1)}$	25°C		395		kHz
t_s	Settling time	$A_V = -1$, Step = 1 V to 2 V, $R_L = 50\text{ k}\Omega^{(1)}$, $C_L = 100\text{ pF}^{(1)}$	To 0.1%	25°C	5.6		μs
			To 0.01%	25°C	12.5		
ϕ_m	Phase margin at unity gain	$R_L = 50\text{ k}\Omega^{(1)}$, $C_L = 100\text{ pF}^{(1)}$	25°C		55		°
G_m	Gain margin	$R_L = 50\text{ k}\Omega^{(1)}$, $C_L = 100\text{ pF}^{(1)}$	25°C		11		dB

(1) Referenced to 1.5 V

TLV2264A ELECTRICAL CHARACTERISTICS

 $V_{DD} = 5\text{ V}$, over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T_A	MIN	TYP	MAX	UNIT
V_{IO} Input offset voltage	$V_{DD\pm} = \pm 2.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$	25°C		300	950	mV
		Full range			1500	
α_{VIO} Temperature coefficient of input offset voltage	$V_{DD\pm} = \pm 2.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$	25°C to 125°C		2		$\mu\text{V}/^\circ\text{C}$
Input offset voltage long-term drift ⁽¹⁾	$V_{DD\pm} = \pm 2.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$	25°C		0.003		$\mu\text{V}/\text{mo}$
I_{IO} Input offset current	$V_{DD\pm} = \pm 2.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$	25°C		0.5	60	pA
		125°C			800	
I_{IB} Input bias current	$V_{DD\pm} = \pm 2.5\text{ V}$, $V_{IC} = 0$, $V_O = 0$, $R_S = 50\ \Omega$	25°C		1	60	pA
		125°C			800	
V_{ICR} Common-mode input voltage range	$R_S = 50\ \Omega$, $ V_{IO} \leq 5\text{ mV}$	25°C	0 to 4	–0.3 to 4.2		V
		Full range	0 to 3.5			
V_{OH} High-level output voltage	$I_{OH} = -20\ \mu\text{A}$	25°C		4.99		V
		25°C		4.85	4.94	
	$I_{OH} = -100\ \mu\text{A}$	Full range		4.82		
		25°C		4.7	4.85	
V_{OL} Low-level output voltage	$I_{OL} = -400\ \mu\text{A}$	Full range		4.5		V
		25°C		0.01		
	$I_{OL} = 50\ \mu\text{A}$	25°C		0.09	0.15	
		Full range			0.15	
V_{IC} 2.5 V	$I_{OL} = 500\ \mu\text{A}$	25°C		0.2	0.3	V
		Full range			0.3	
	$I_{OL} = 1\text{ mA}$	25°C		0.2	0.3	
		Full range			0.3	
A_{VD} Large-signal differential voltage amplification	$V_{IC} = 2.5\text{ V}$, $V_O = 1\text{ V to }4\text{ V}$	$R_L = 50\text{ k}\Omega^{(2)}$	25°C	80	170	V/mV
		$R_L = 50\text{ k}\Omega^{(2)}$	Full range	50		
		$R_L = 1\text{ M}\Omega^{(2)}$	25°C		550	
$r_{i(d)}$ Differential input resistance		25°C		10^{12}		Ω
$r_{i(c)}$ Common-mode input resistance		25°C		10^{12}		Ω
$c_{i(c)}$ Common-mode input capacitance	$f = 10\text{ kHz}$	25°C		8		pF
z_o Closed-loop output impedance	$f = 100\text{ kHz}$, $A_V = 10$	25°C		240		Ω
CMRR Common-mode rejection ratio	$V_{IC} = 0\text{ to }2.7\text{ V}$, $V_O = 2.5\text{ V}$, $R_S = 50\ \Omega$	25°C		70	83	dB
		Full range		70		
k_{SVR} Supply voltage rejection ratio ($\Delta V_{DD}/\Delta V_{IO}$)	$V_{DD} = 4.4\text{ V to }8\text{ V}$, $V_{IC} = V_{DD}/2$, No load	25°C		80	95	dB
		Full range		80		
I_{DD} Supply current	$V_O = 2.5\text{ V}$, No load	25°C		0.8	1	mA
		Full range			1	

(1) Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at $T_A = 150^\circ\text{C}$ extrapolated to $T_A = 25^\circ\text{C}$ using the Arrhenius equation and assuming an activation energy of 0.96 eV.

(2) Referenced to 2.5 V

TLV2264A OPERATING CHARACTERISTICSV_{DD} = 5 V, over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T _A	MIN	TYP	MAX	UNIT
SR	Slew rate at unity gain	V _O = 0.5 V to 3.5 V, R _L = 50 kΩ ⁽¹⁾ , C _L = 100 pF ⁽¹⁾	25°C	0.35	0.55		V/μs
			Full range	0.25			
V _n	Equivalent input noise voltage	f = 10 Hz	25°C		40		nV/√Hz
		f = 1 kHz	25°C		12		
V _{N(PP)}	Peak-to-peak equivalent input noise voltage	f = 0.1 Hz to 1 Hz	25°C		0.7		μV
		f = 0.1 Hz to 10 Hz	25°C		1.3		
I _n	Equivalent input noise current		25°C		0.6		fA/√Hz
THD+N	Total harmonic distortion plus noise	V _O = 0.5 V to 2.5 V, f = 20 kHz, R _L = 50 kΩ ⁽¹⁾	A _V = 1 25°C		0.017		%
			A _V = 10 25°C		0.03		
	Gain-bandwidth product	f = 50 kHz, R _L = 50 kΩ ⁽¹⁾ , C _L = 100 pF ⁽¹⁾	25°C		0.71		MHz
B _{OM}	Maximum output-swing bandwidth	V _{O(PP)} = 2 V, A _V = 1, R _L = 50 kΩ ⁽¹⁾ , C _L = 100 pF ⁽¹⁾	25°C		185		kHz
t _s	Settling time	A _V = –1, Step = 0.5 V to 2.5 V, R _L = 50 kΩ ⁽¹⁾ , C _L = 100 pF ⁽¹⁾	To 0.1% 25°C		6.4		μs
			To 0.01% 25°C		14.1		
φ _m	Phase margin at unity gain	R _L = 50 kΩ ⁽¹⁾ , C _L = 100 pF ⁽¹⁾	25°C		56		°
G _m	Gain margin	R _L = 50 kΩ ⁽¹⁾ , C _L = 100 pF ⁽¹⁾	25°C		11		dB

(1) Referenced to 2.5 V

TYPICAL CHARACTERISTICS

For all curves where $V_{DD} = 5\text{ V}$, all loads are referenced to 2.5 V. For all curves where $V_{DD} = 3\text{ V}$, all loads are referenced to 1.5 V. Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

Table of Graphs

			FIGURE
V_{IO}	Input offset voltage	Distribution	2–5
		vs Common-mode voltage	6, 7
α_{VIO}	Input offset voltage temperature coefficient	Distribution	8–11
I_{IB}/I_{IO}	Input bias and input offset currents	vs Free-air temperature	12
V_I	Input voltage	vs Supply voltage	13
		vs Free-air temperature	14
V_{OH}	High-level output voltage	vs High-level output current	15, 18
V_{OL}	Low-level output voltage	vs Low-level output current	16, 17, 19
$V_{O(PP)}$	Maximum peak-to-peak output voltage	vs Frequency	20
I_{OS}	Short-circuit output current	vs Supply voltage	21
		vs Free-air temperature	22
V_{ID}	Differential input voltage	vs Output voltage	23, 24
A_{VD}	Differential voltage amplification	vs Load resistance	25
A_{VD}	Large-signal differential voltage amplification	vs Frequency	26, 27
		vs Free-air temperature	28, 29
z_o	Output impedance	vs Frequency	30, 31
CMRR	Common-mode rejection ratio	vs Frequency	32
		vs Free-air temperature	33
k_{SVR}	Supply-voltage rejection ratio	vs Frequency	34, 35
		vs Free-air temperature	36, 37
I_{DD}	Supply current	vs Free-air temperature	38, 39
SR	Slew rate	vs Load capacitance	40
		vs Free-air temperature	41
V_O	Inverting large-signal pulse response		42, 43
V_O	Voltage-follower large-signal pulse response		44, 45
V_O	Inverting small-signal pulse response		46, 47
V_O	Voltage-follower small-signal pulse response		48, 49
V_n	Equivalent input noise voltage	vs Frequency	50, 51
	Input noise voltage	Over a 10-second period	52
	Integrated noise voltage	vs Frequency	53
THD+N	Total harmonic distortion plus noise	vs Frequency	54
	Gain-bandwidth product	vs Supply voltage	55
		vs Free-air temperature	56
ϕ_m	Phase margin	vs Frequency	26, 27
		vs Load capacitance	57
G_m	Gain margin	vs Load capacitance	58
B_1	Unity-gain bandwidth	vs Load capacitance	59
	Overestimation of phase margin	vs Load capacitance	60

**DISTRIBUTION OF TLV2262
INPUT OFFSET VOLTAGE**

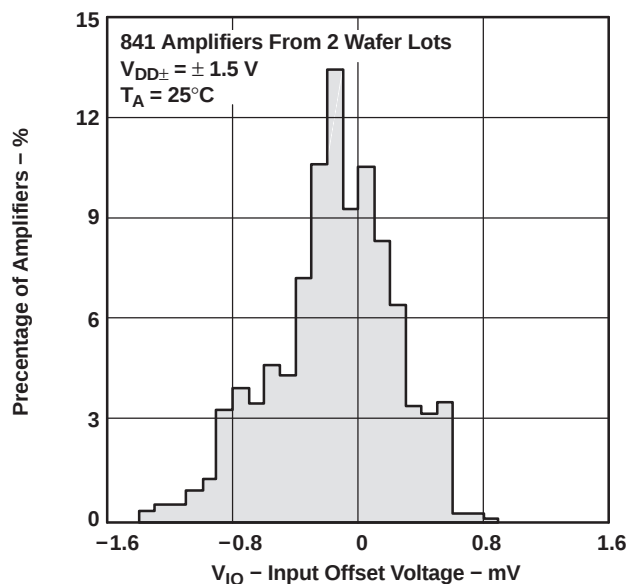


Figure 2.

**DISTRIBUTION OF TLV2262
INPUT OFFSET VOLTAGE**

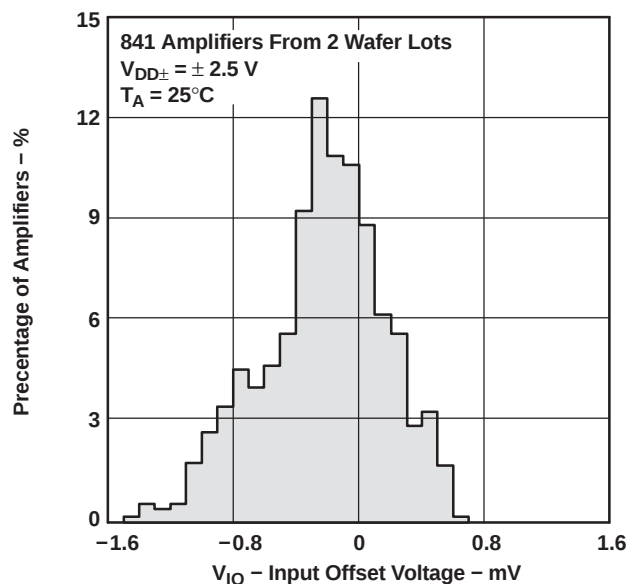


Figure 3.

**DISTRIBUTION OF TLV2264
INPUT OFFSET VOLTAGE**

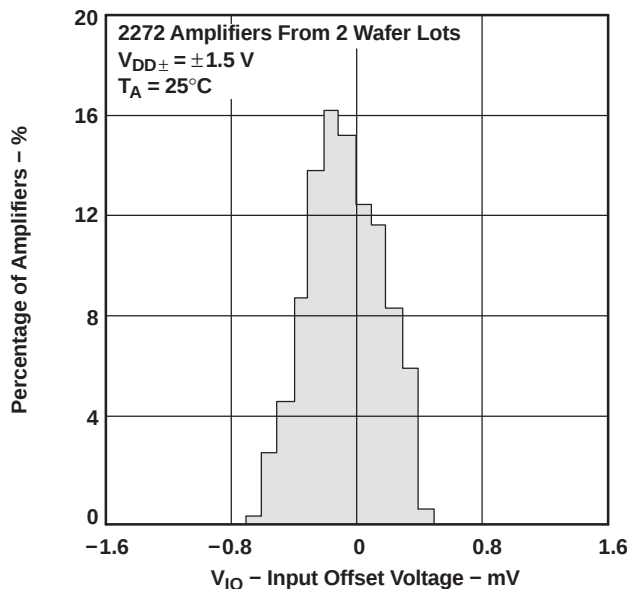


Figure 4.

**DISTRIBUTION OF TLV2264
INPUT OFFSET VOLTAGE**

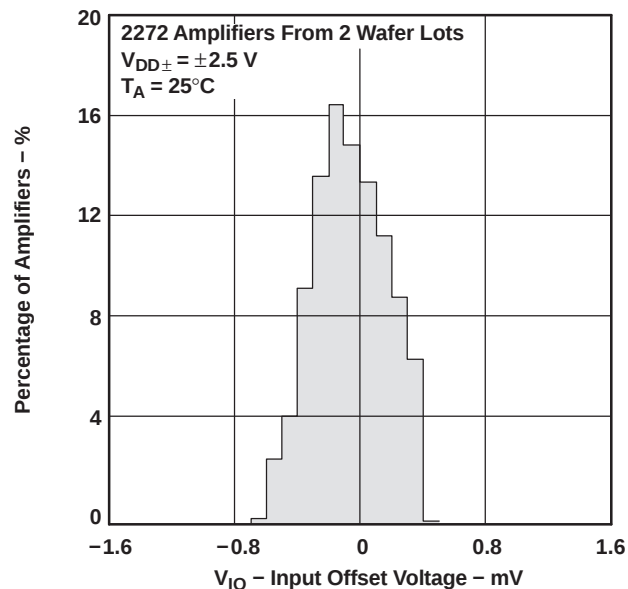


Figure 5.

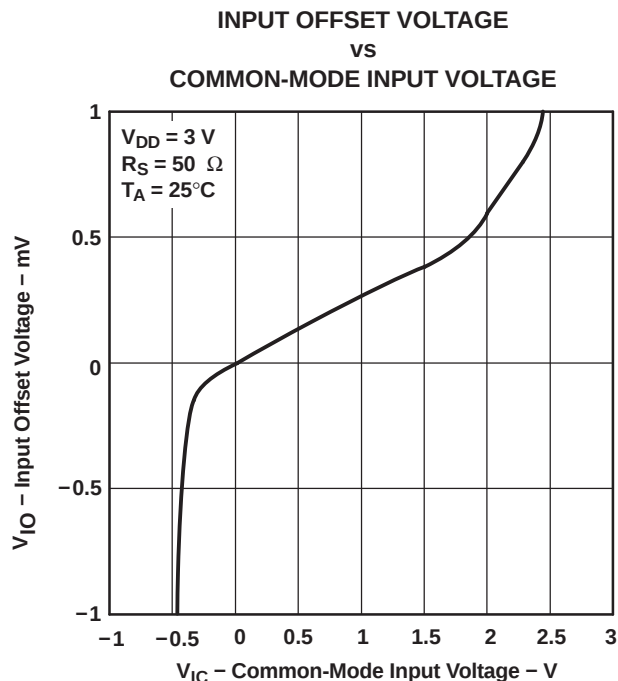


Figure 6.

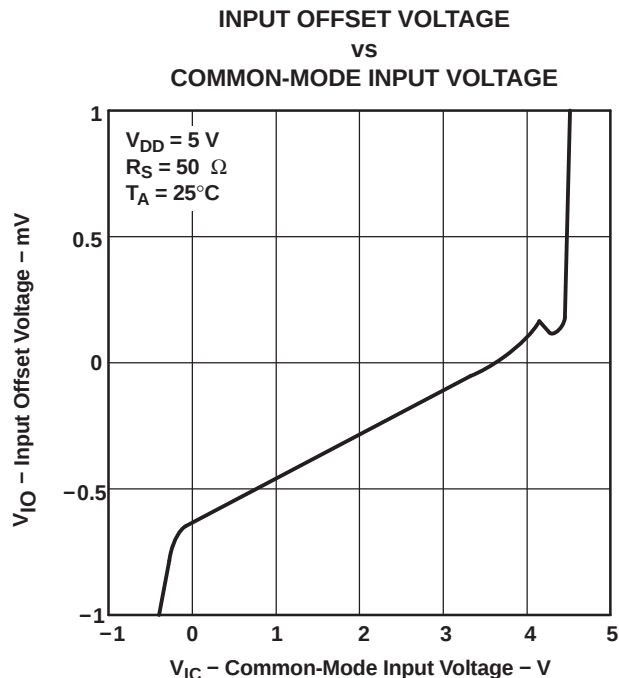


Figure 7.

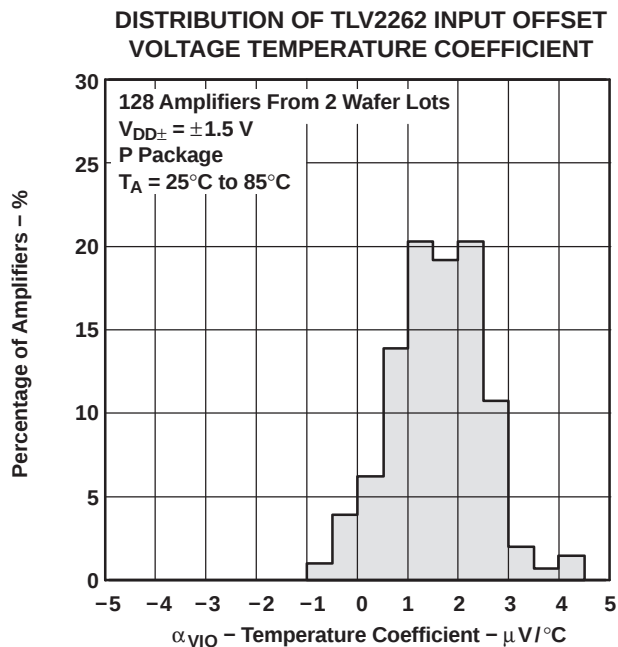


Figure 8.

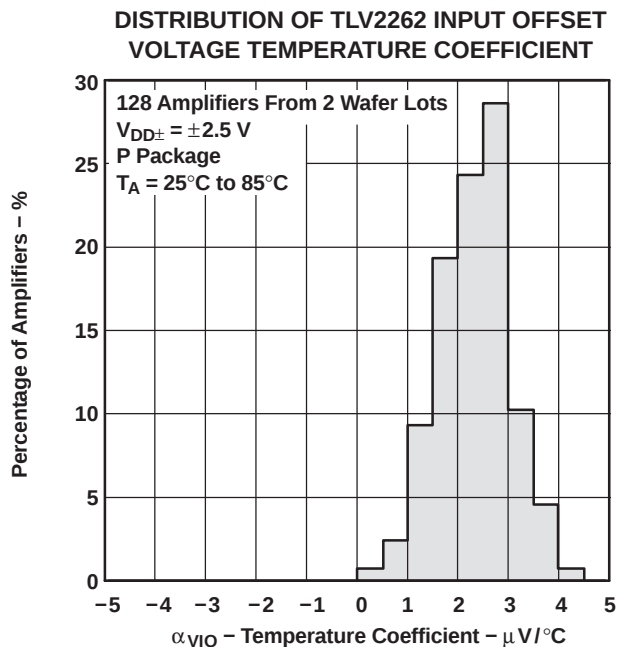


Figure 9.

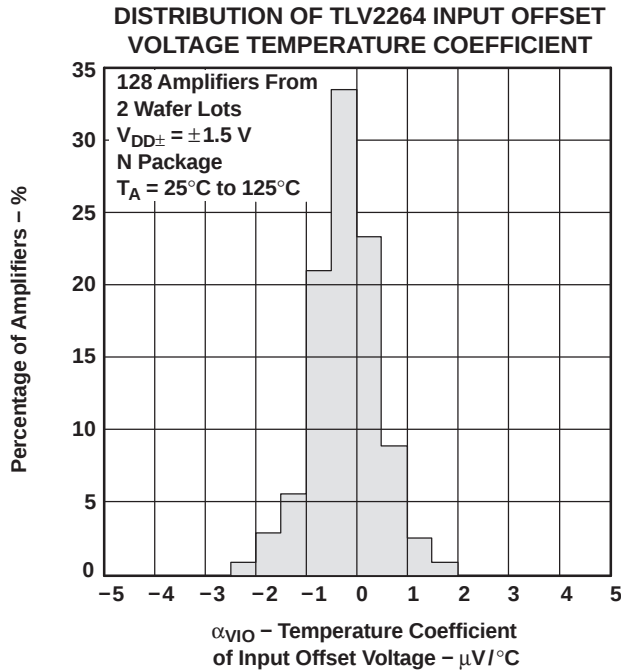


Figure 10.

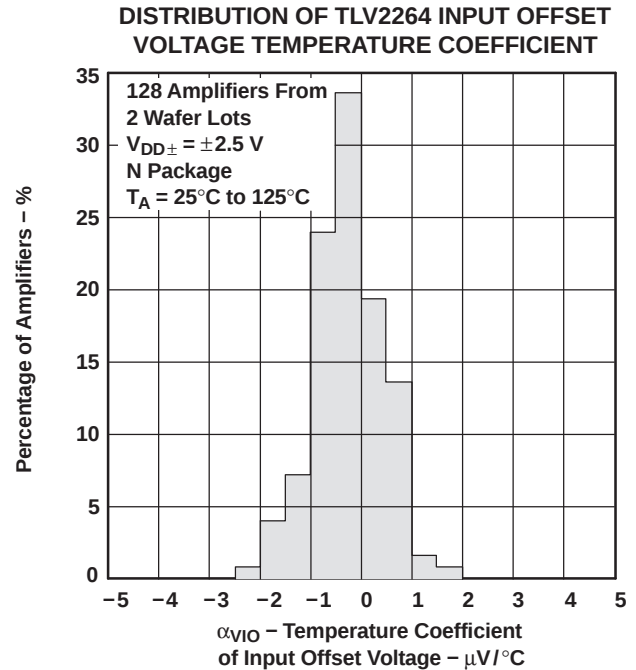


Figure 11.

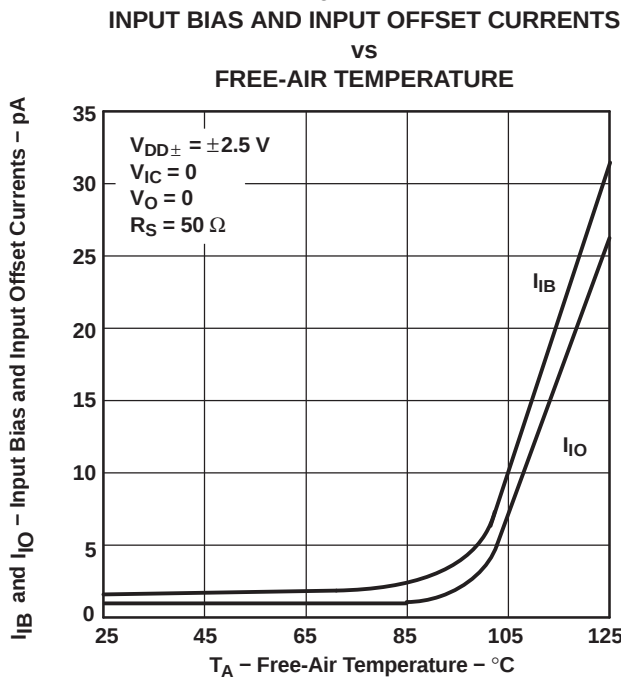


Figure 12.

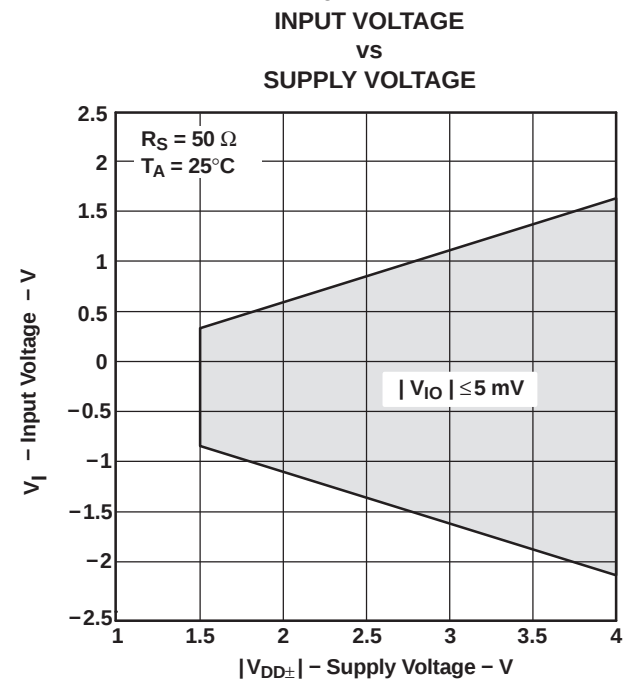


Figure 13.

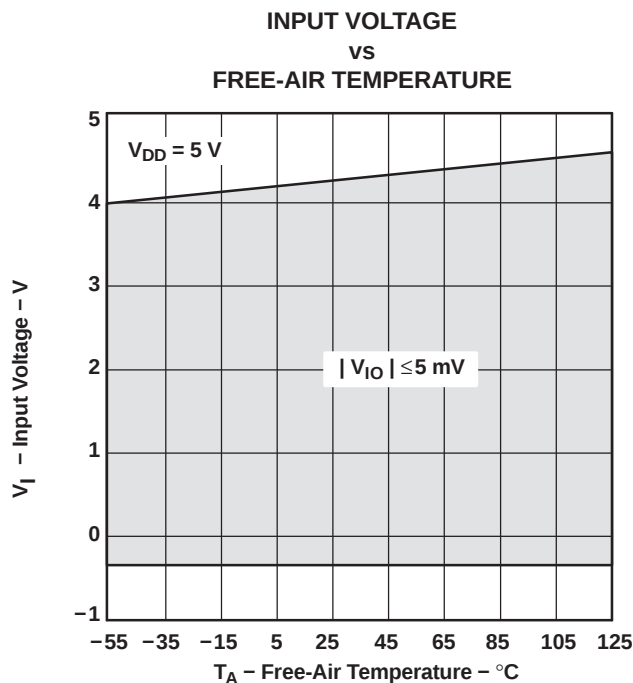


Figure 14.

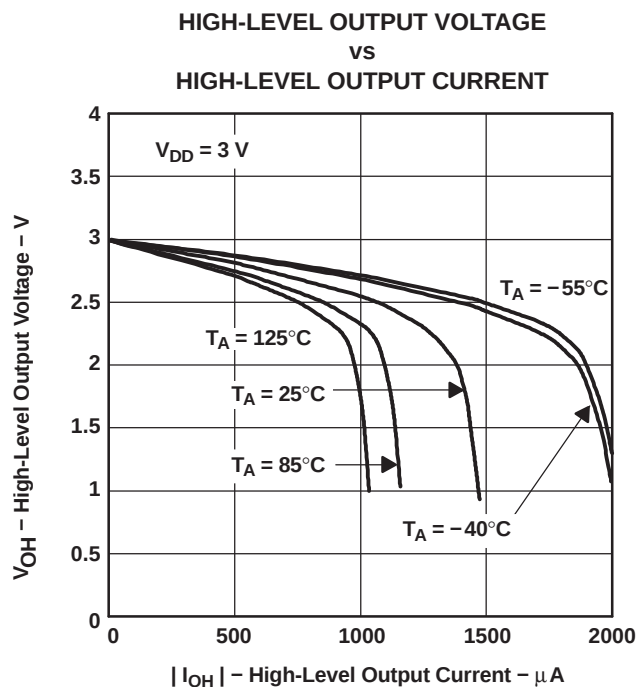


Figure 15.

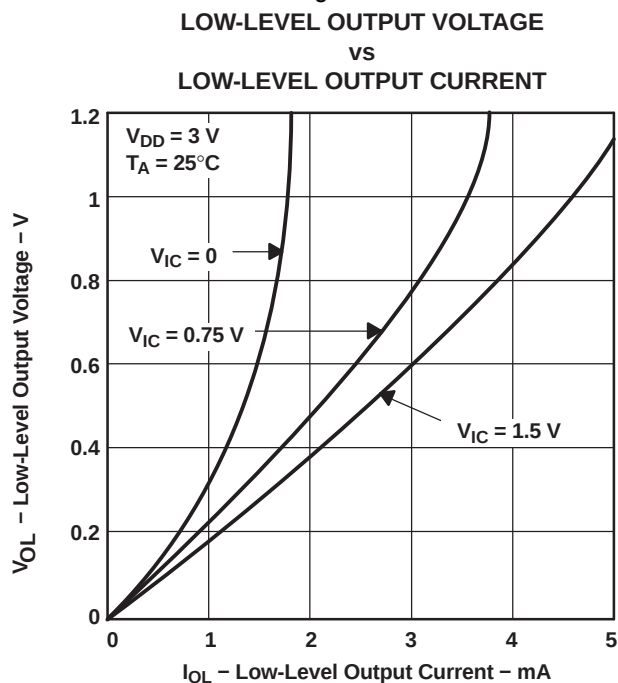


Figure 16.

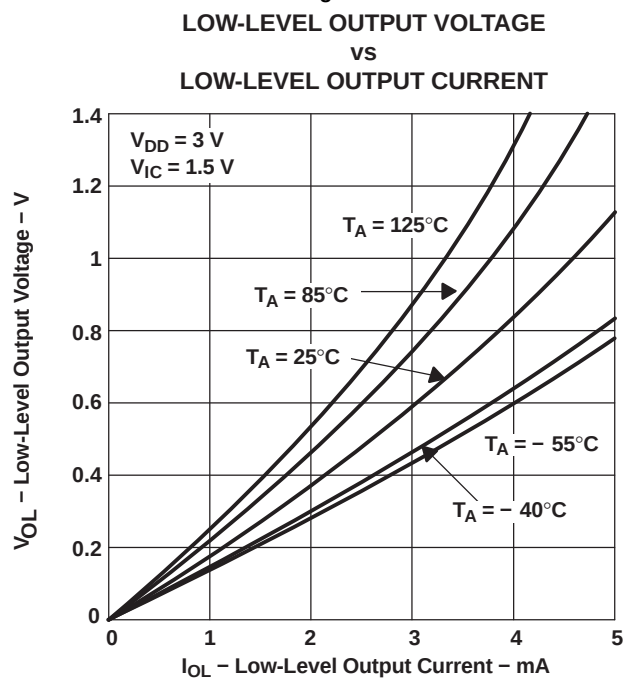


Figure 17.

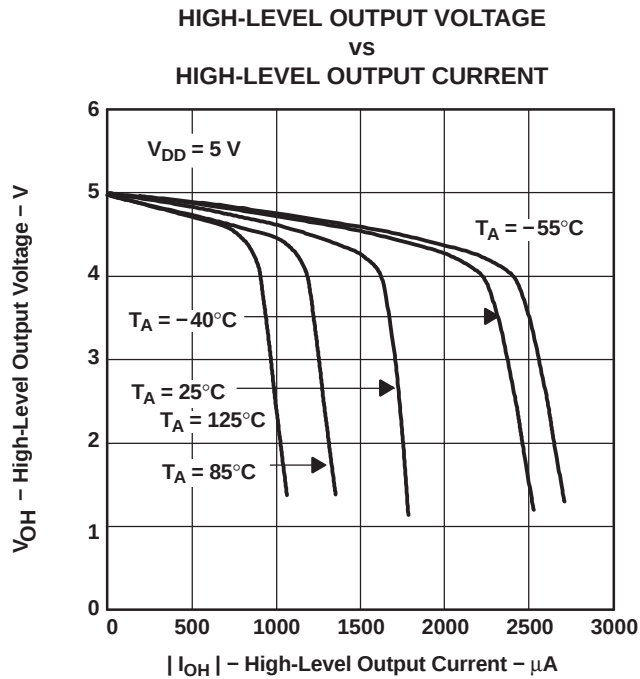


Figure 18.

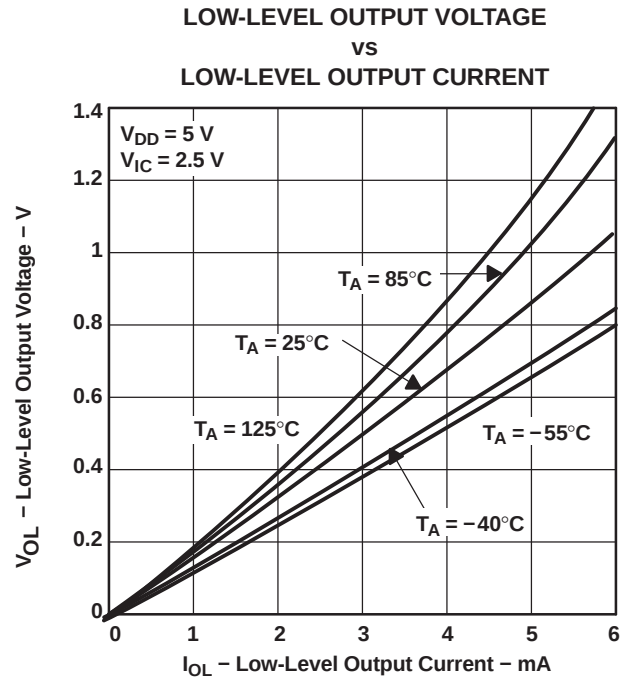


Figure 19.

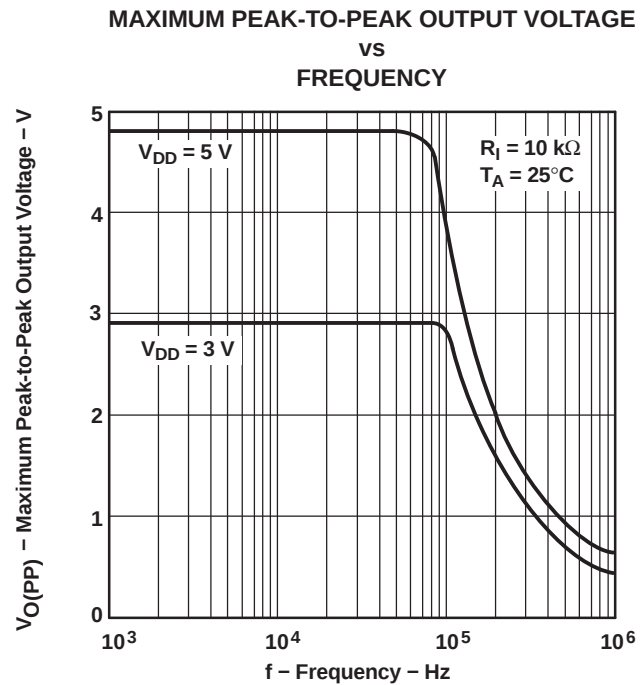


Figure 20.

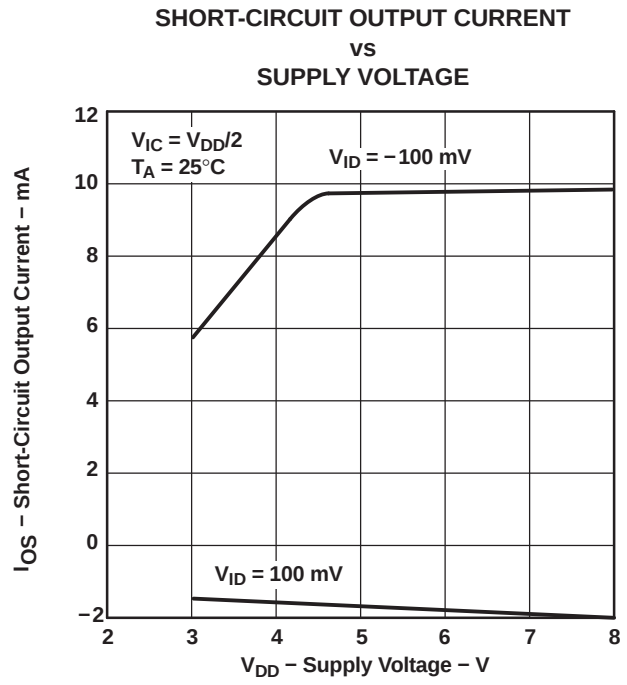
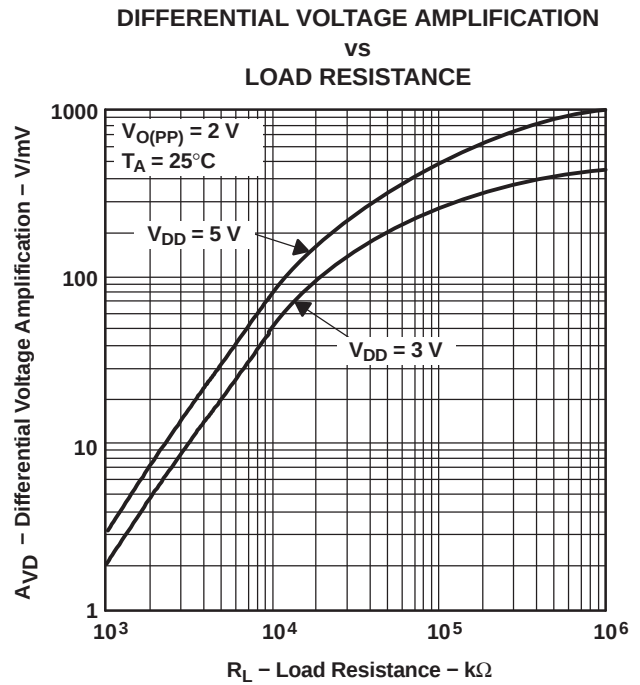
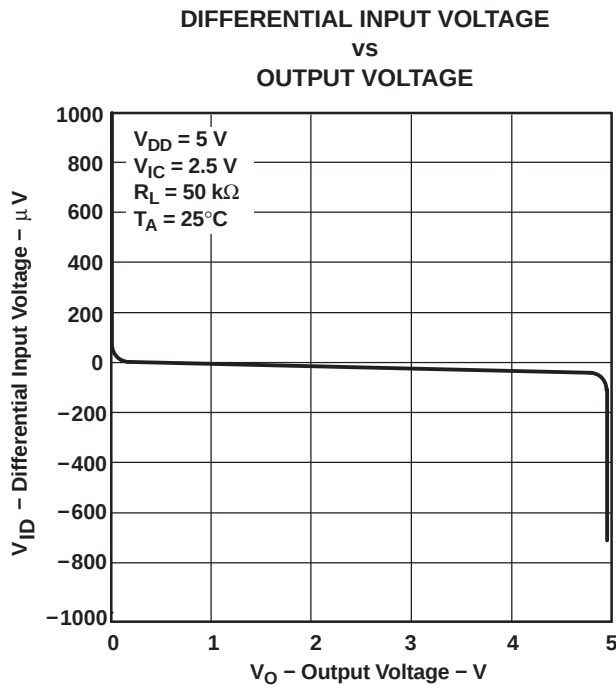
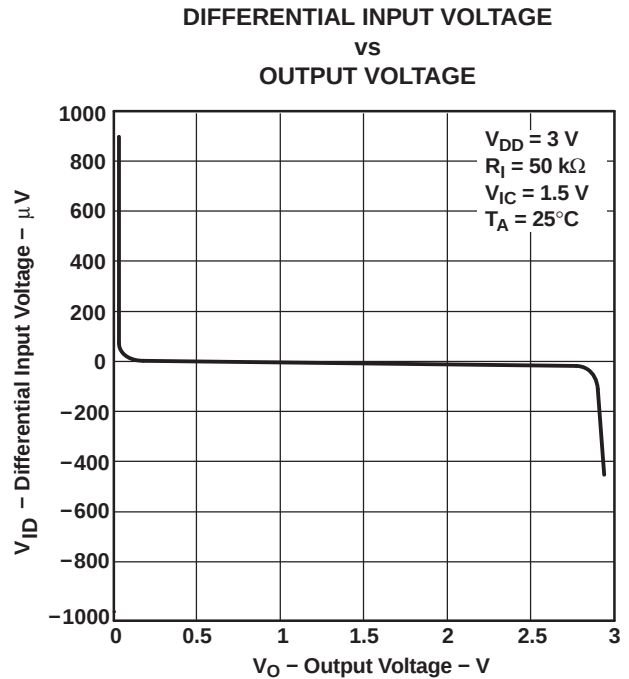
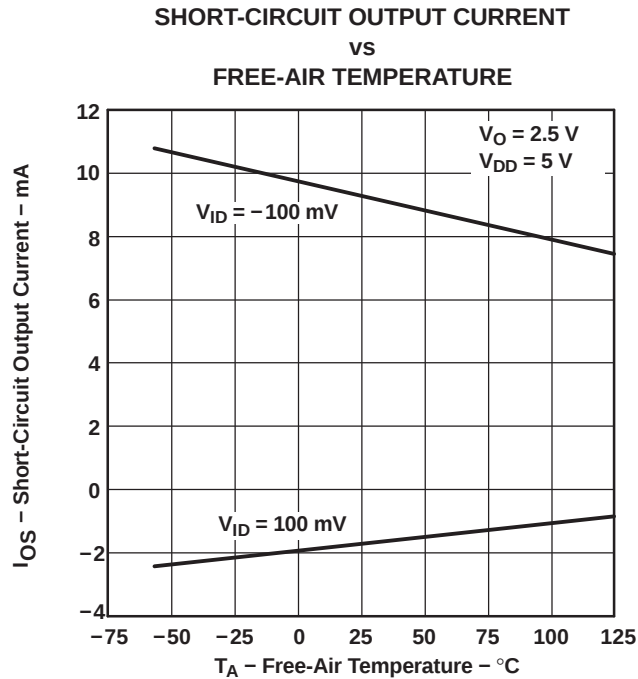


Figure 21.



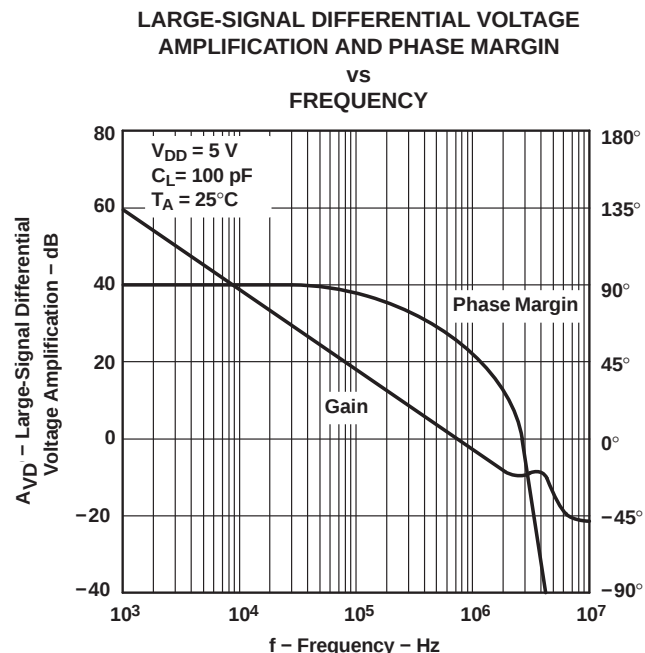


Figure 26.

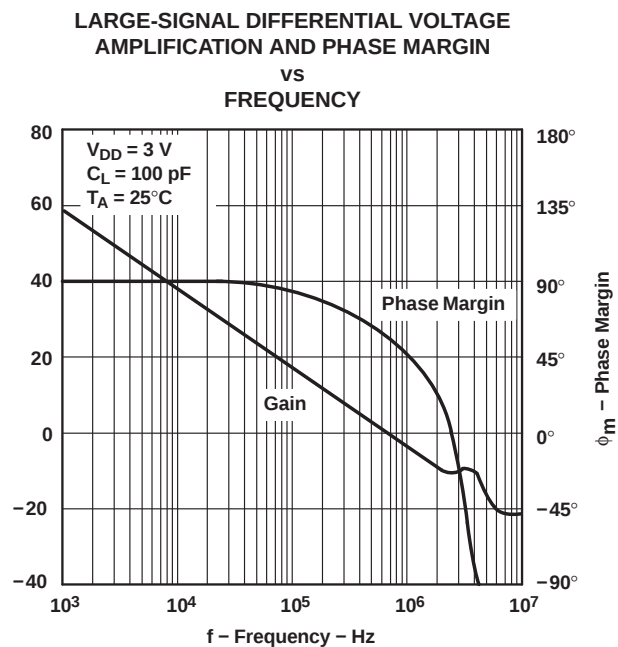


Figure 27.

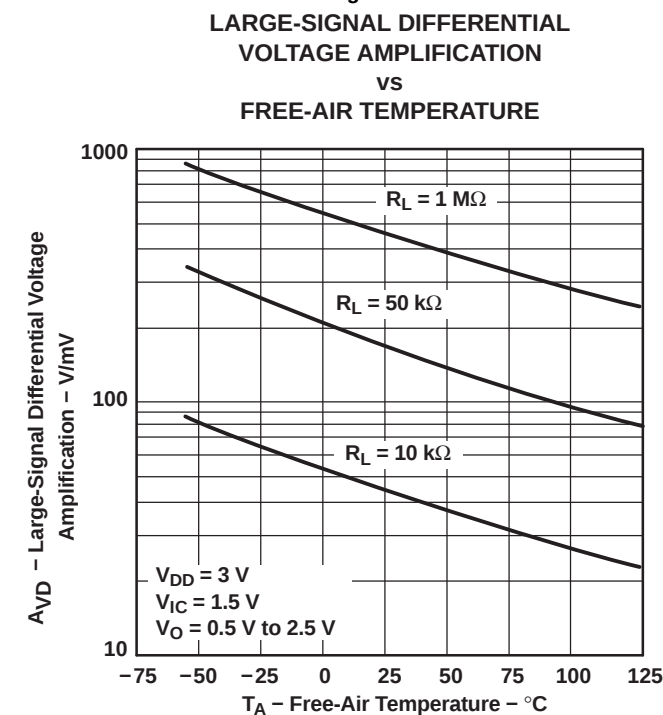


Figure 28.

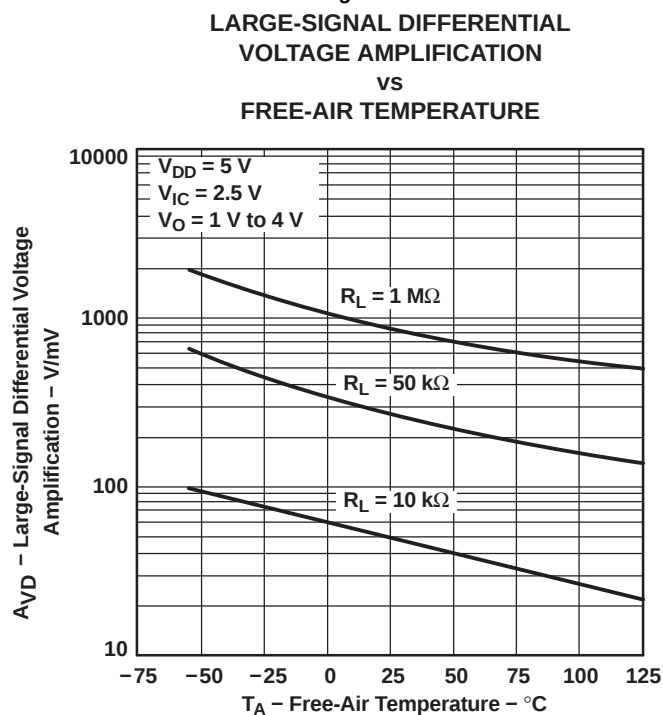


Figure 29.

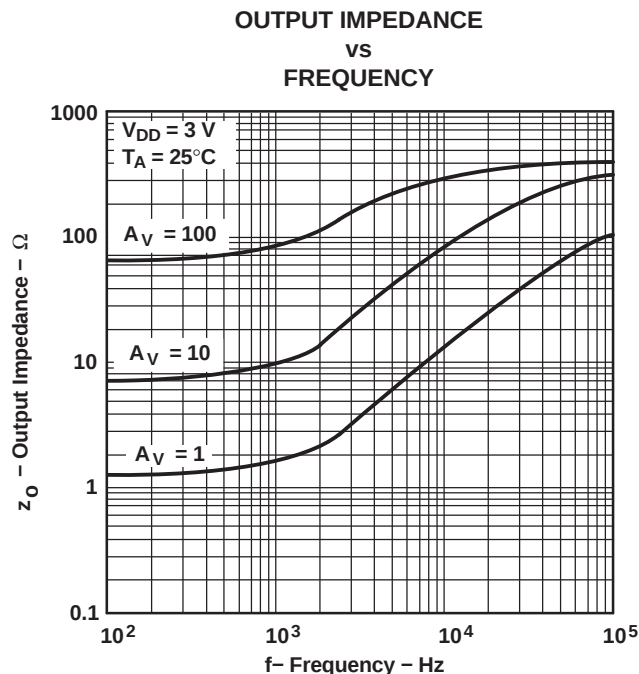


Figure 30.

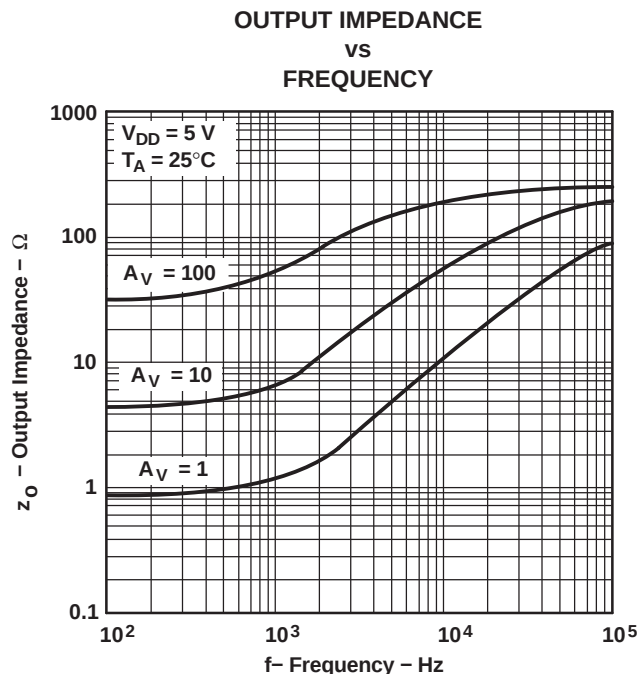


Figure 31.

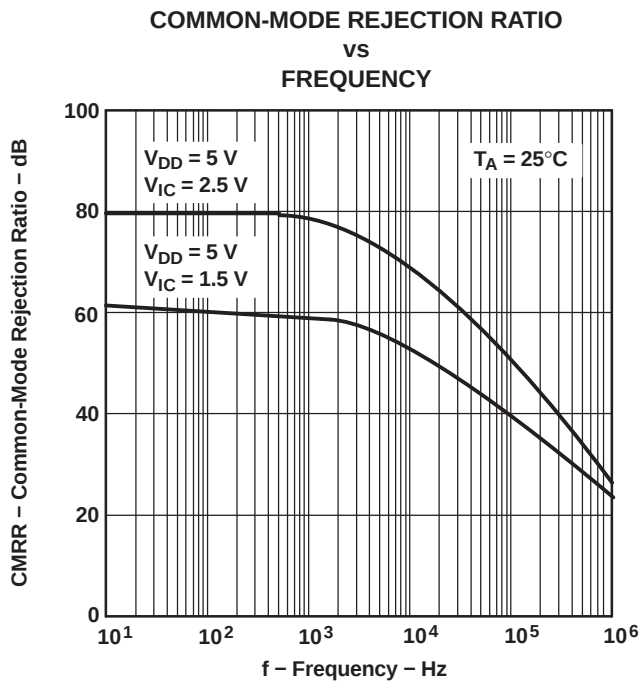


Figure 32.




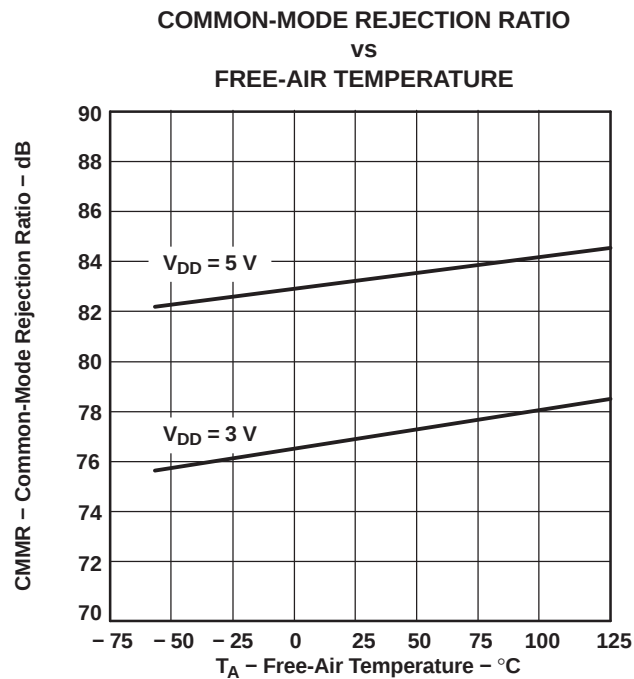



Figure 33.



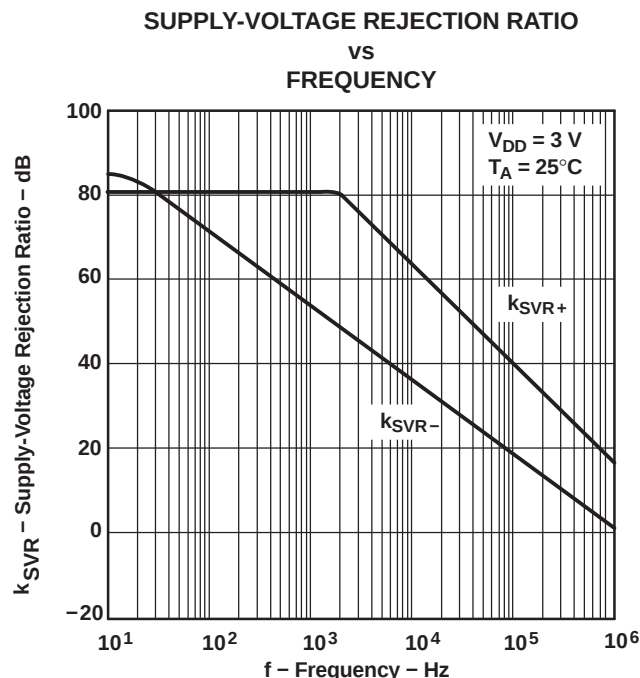
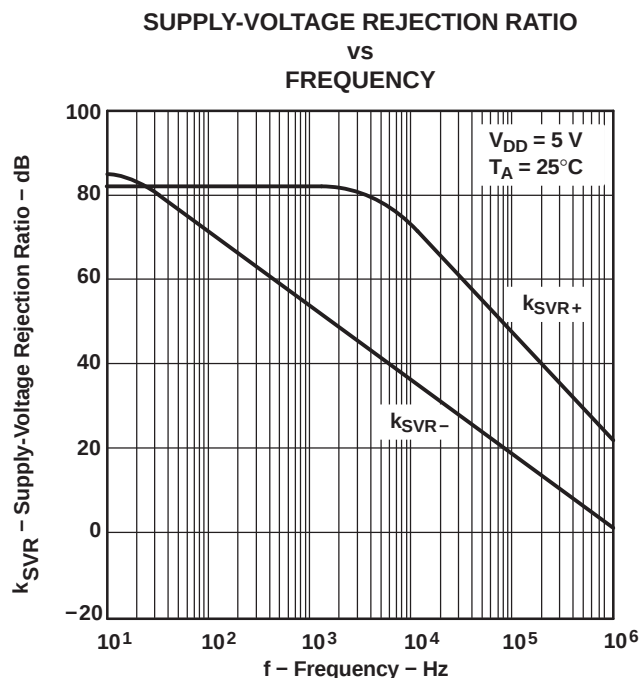


TLV2262

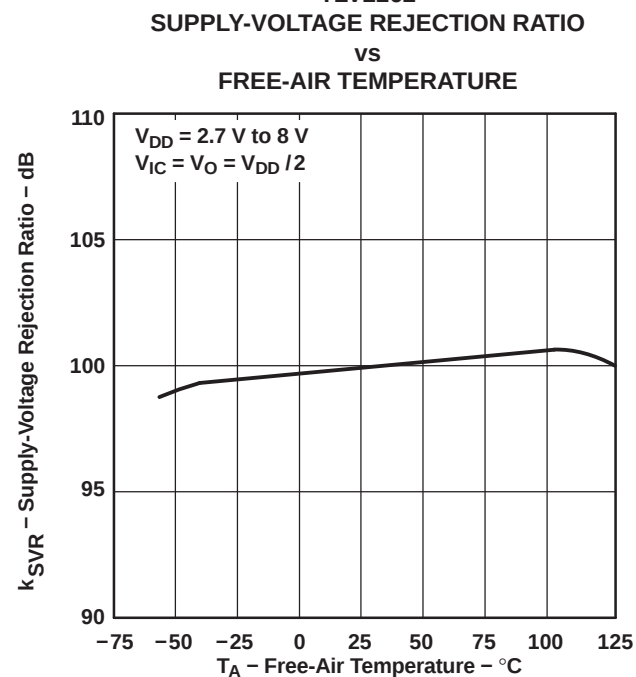

TLV2264

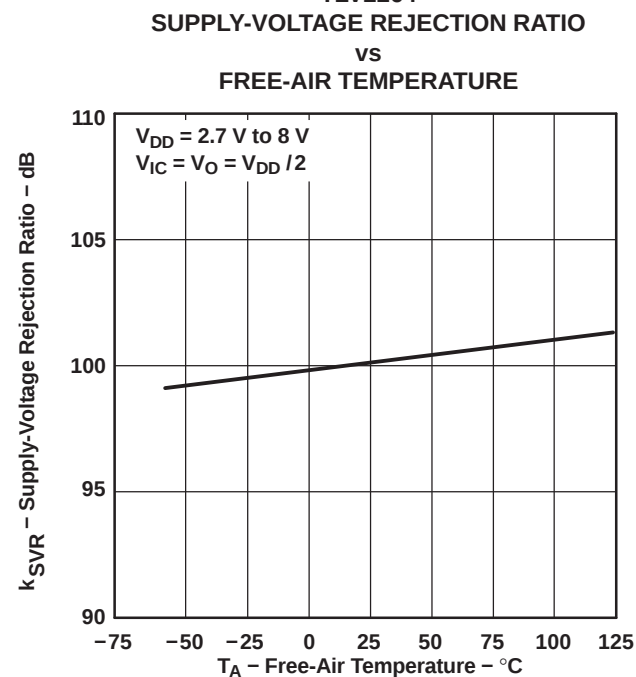

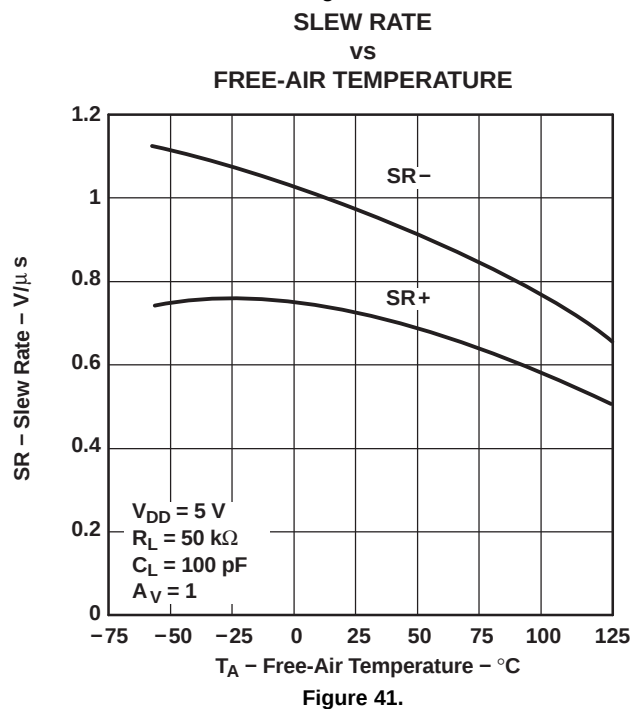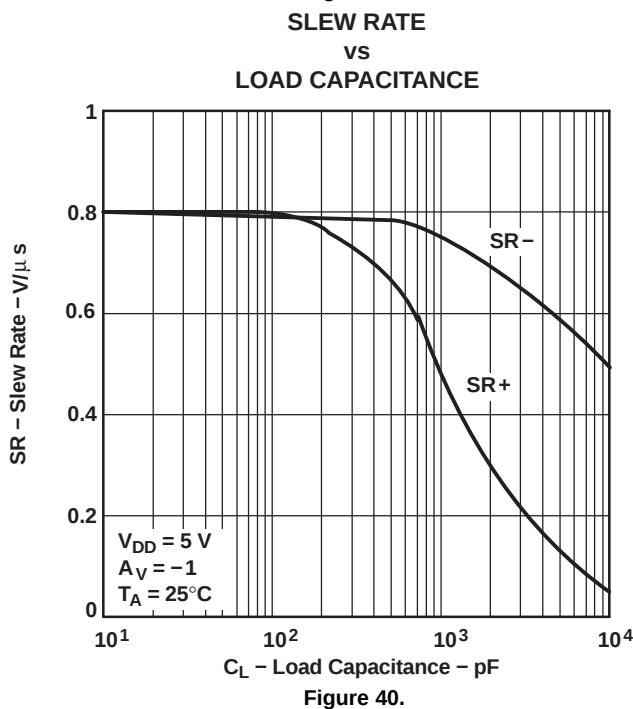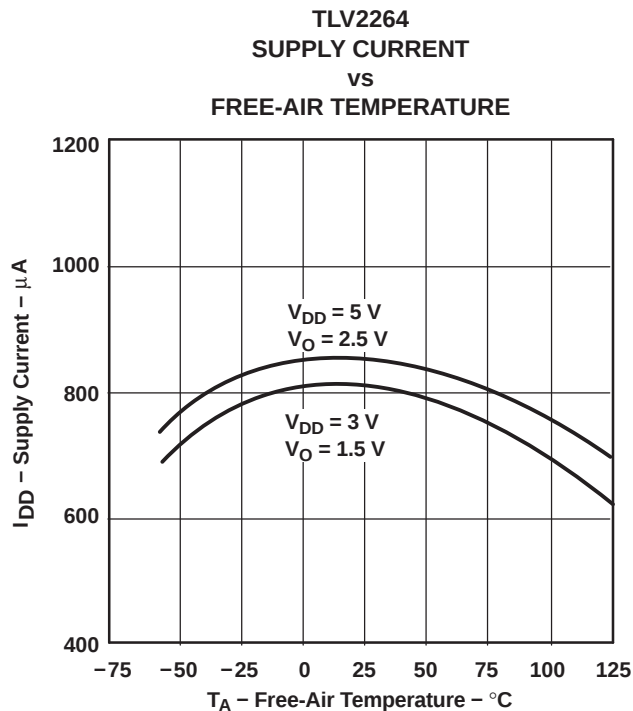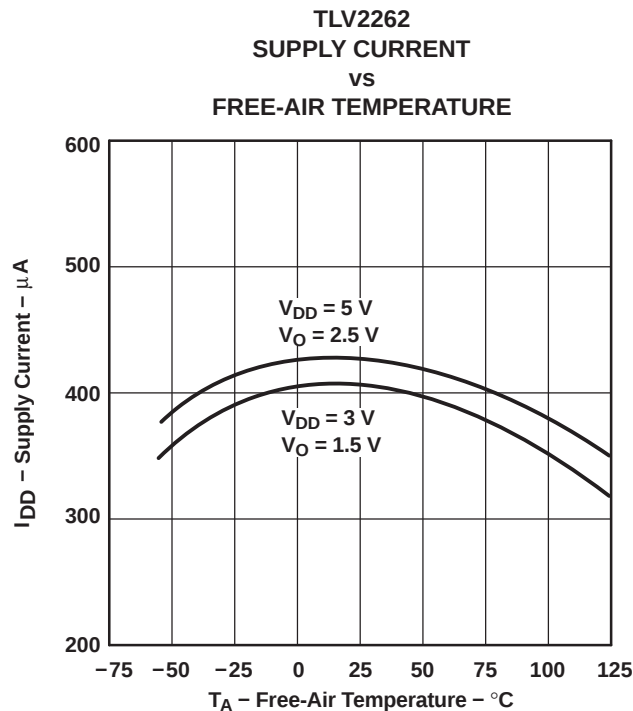

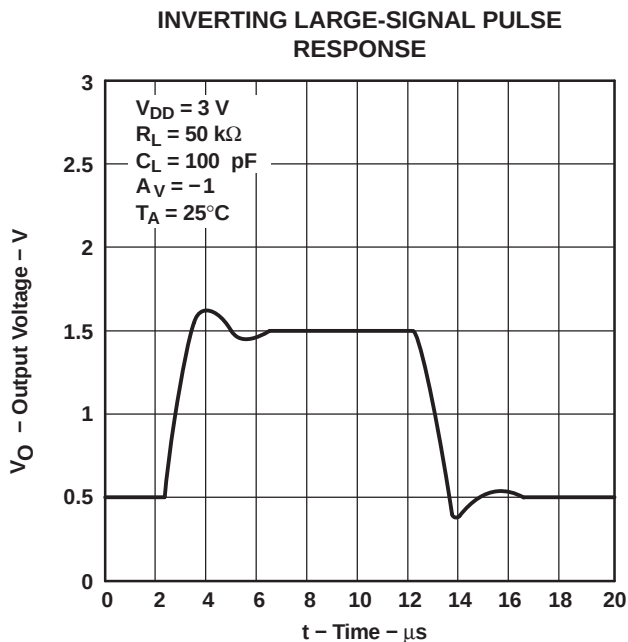


Figure 42.

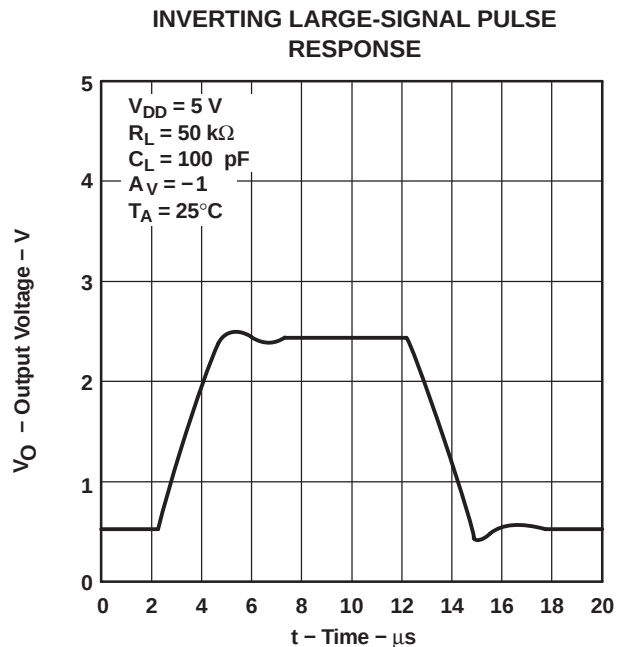


Figure 43.

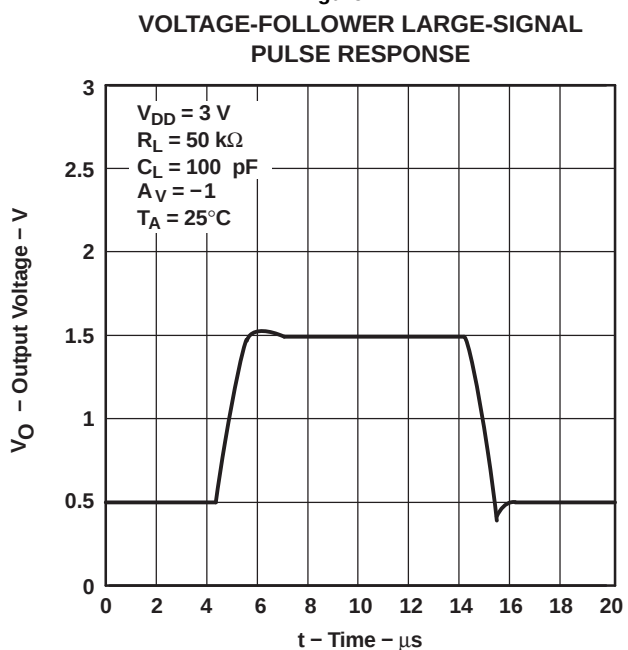


Figure 44.

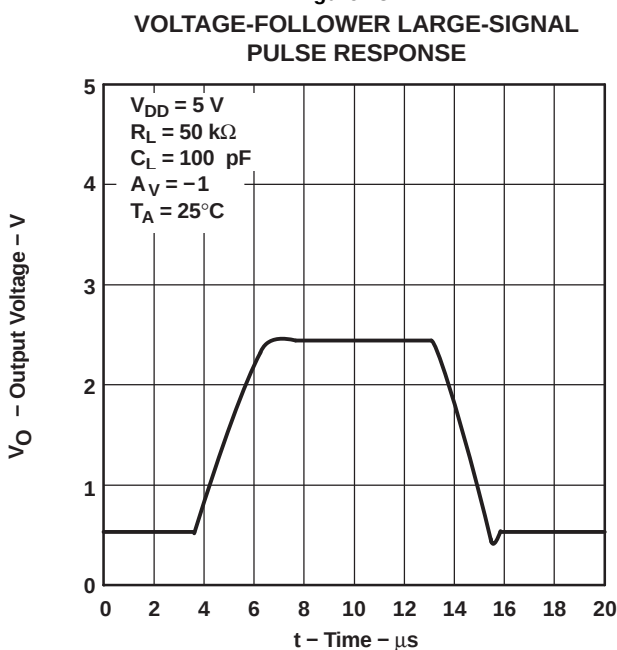


Figure 45.

**INVERTING SMALL-SIGNAL
PULSE RESPONSE**

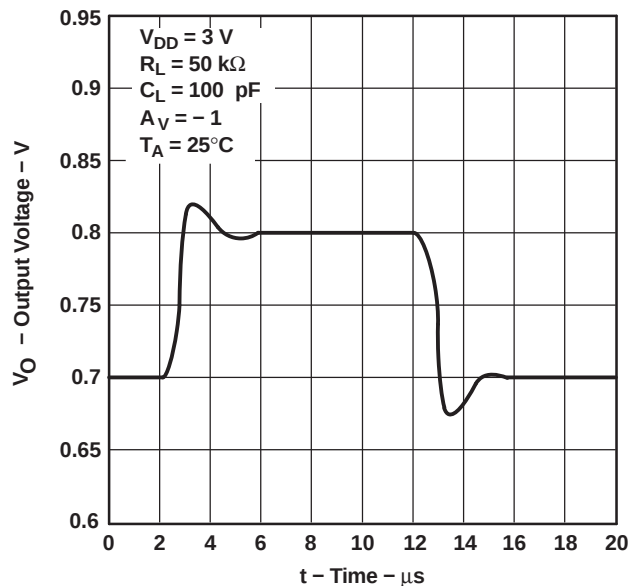


Figure 46.

**INVERTING SMALL-SIGNAL
PULSE RESPONSE**

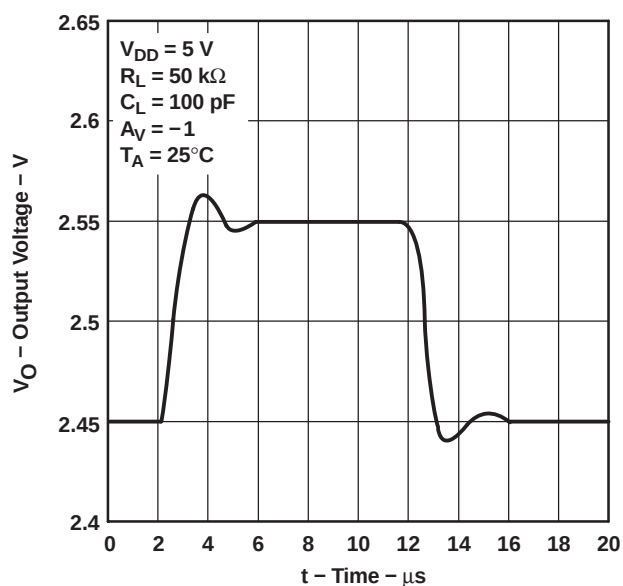


Figure 47.

**VOLTAGE-FOLLOWER SMALL-SIGNAL
PULSE RESPONSE**

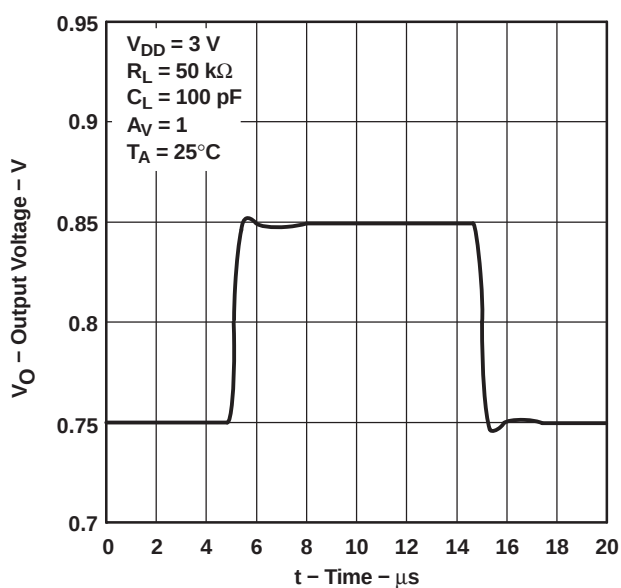


Figure 48.

**VOLTAGE-FOLLOWER SMALL-SIGNAL
PULSE RESPONSE**

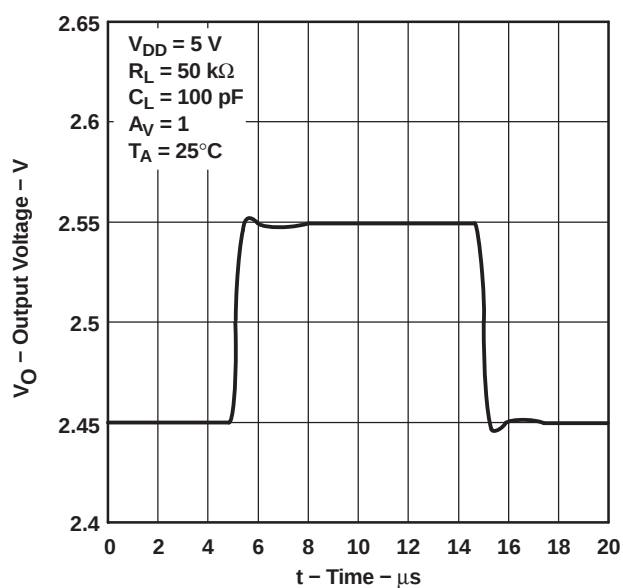


Figure 49.

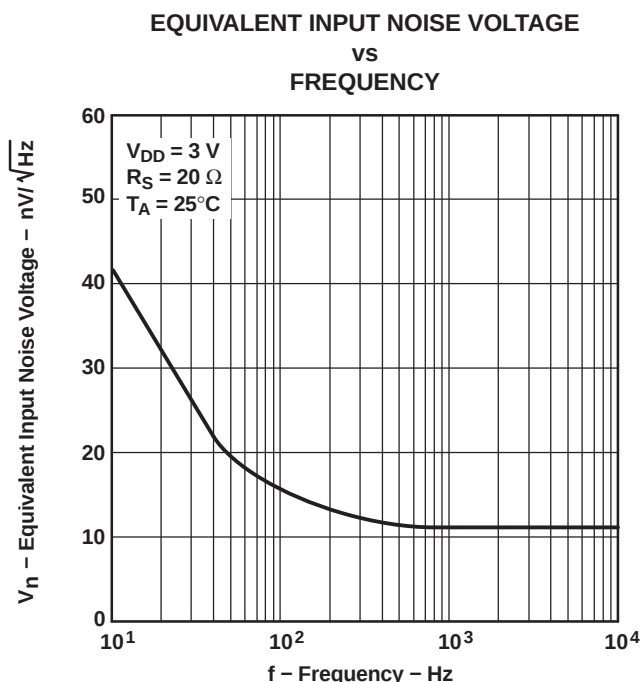


Figure 50.

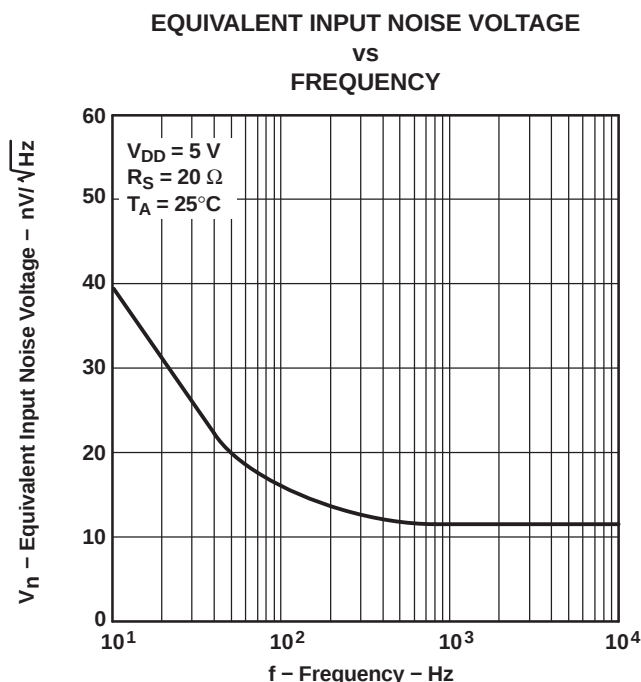


Figure 51.

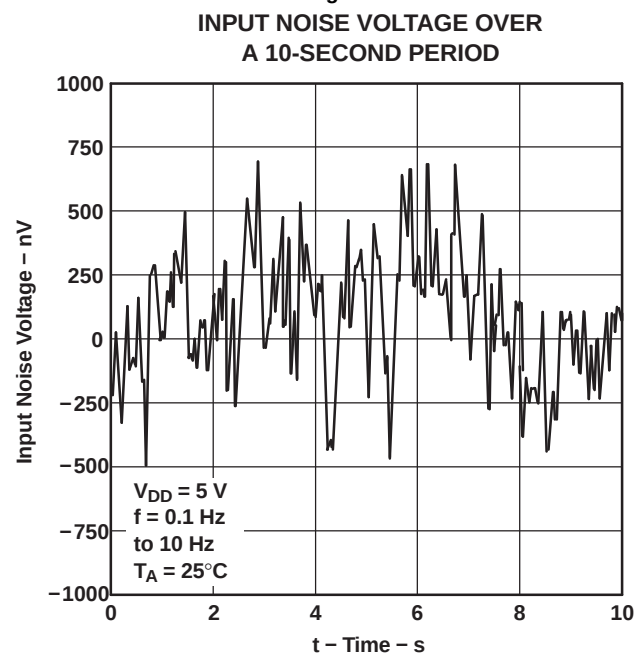


Figure 52.

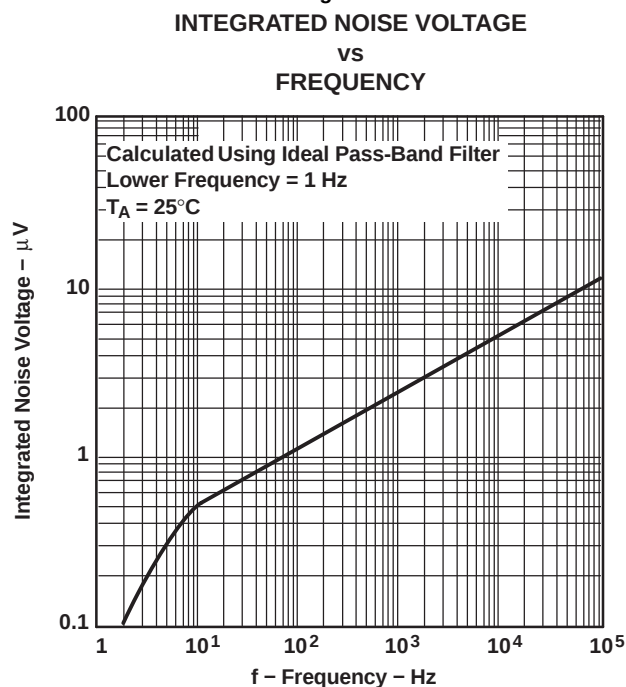


Figure 53.

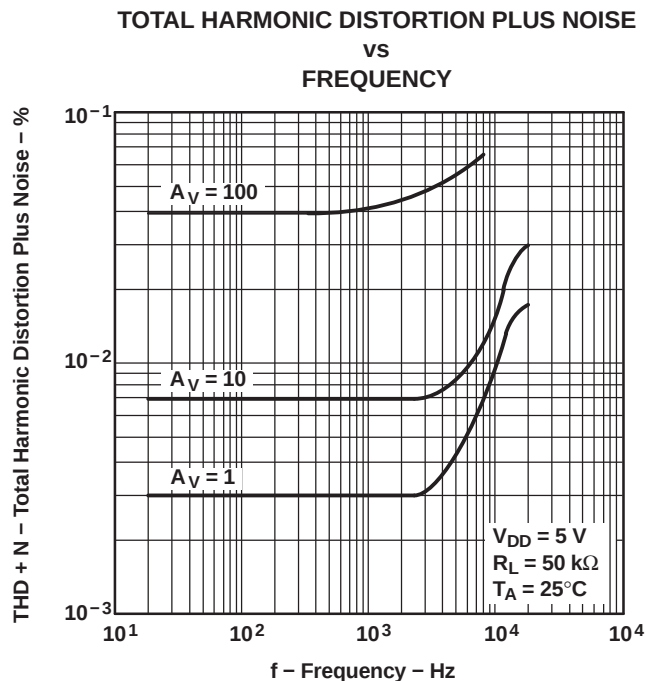


Figure 54.
**GAIN-BANDWIDTH PRODUCT
VS
FREE-AIR TEMPERATURE**

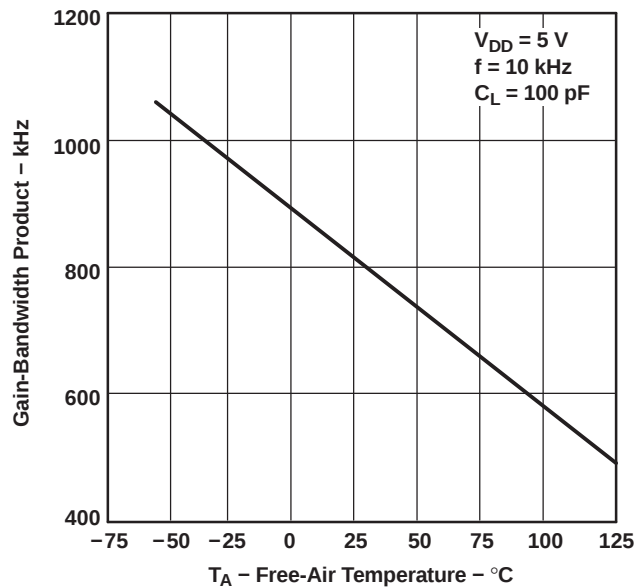


Figure 56.

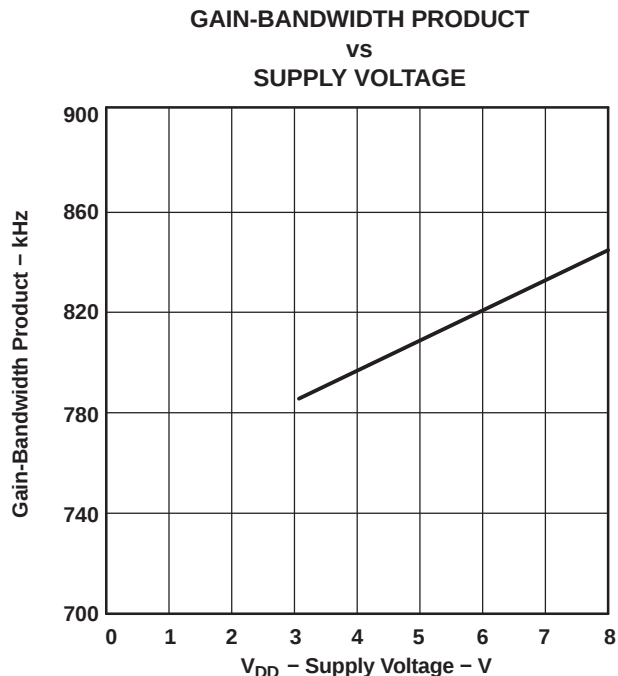


Figure 55.

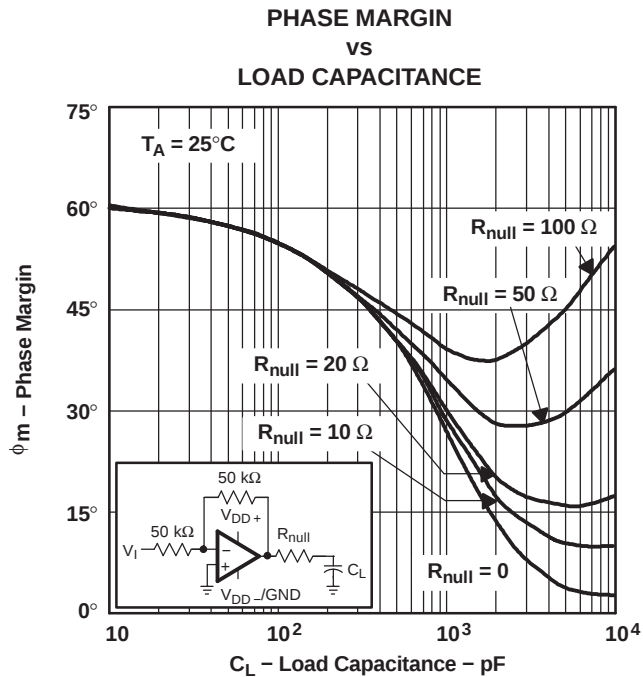


Figure 57.

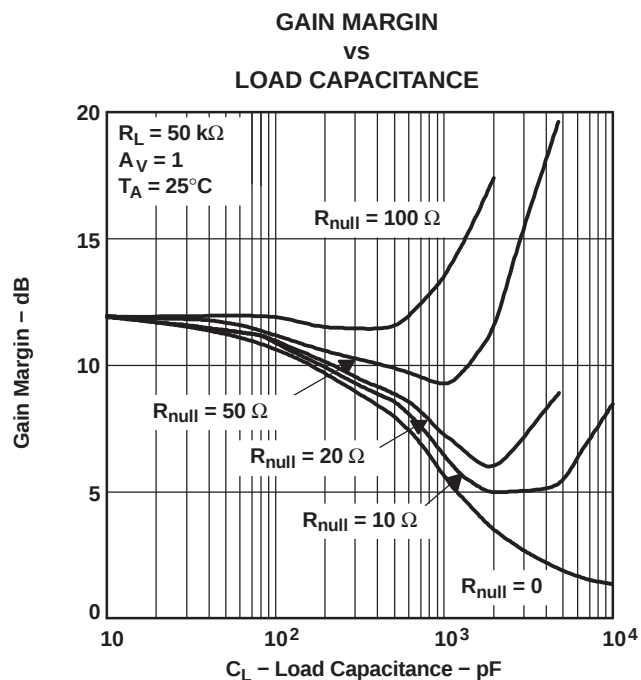


Figure 58.


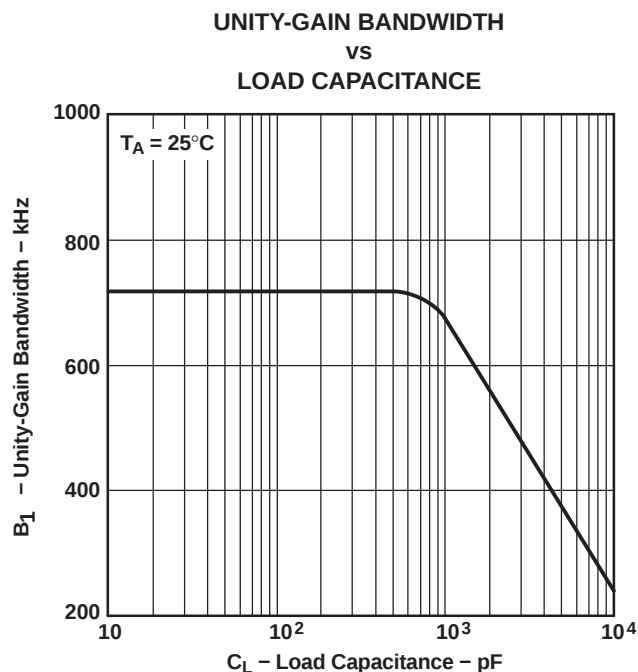


Figure 59.

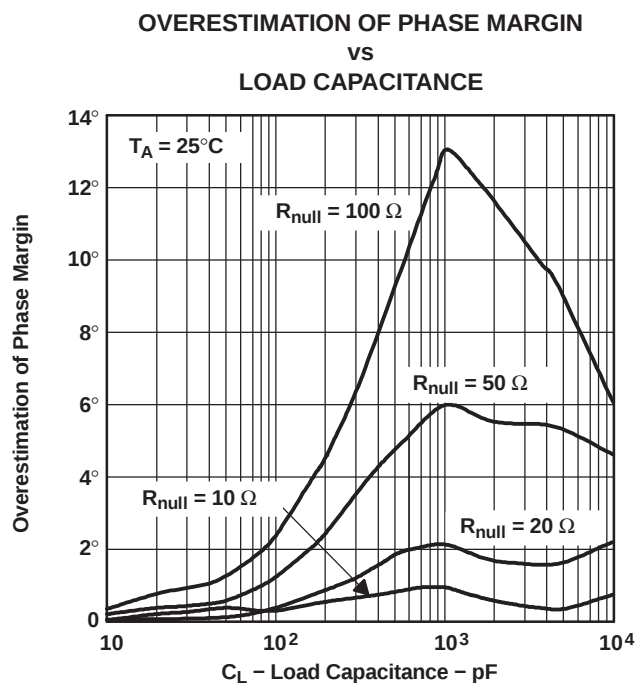

NOTE: See application information.

Figure 60.

APPLICATION INFORMATION

Driving Large Capacitive Loads

The TLV226x is designed to drive larger capacitive loads than most CMOS operational amplifiers. Figure 51 and Figure 52 illustrate its ability to drive loads greater than 400 pF while maintaining good gain and phase margins ($R_{null} = 0$).

A smaller series resistor (R_{null}) at the output of the device (see Figure 61) improves the gain and phase margins when driving large capacitive loads. Figure 51 and Figure 52 show the effects of adding series resistances of 10 Ω , 20 Ω , 50 Ω , and 100 Ω . The addition of this series resistor has two effects: the first is that it adds a zero to the transfer function and the second is that it reduces the frequency of the pole associated with the output load in the transfer function.

The zero introduced to the transfer function is equal to the series resistance times the load capacitance. To calculate the improvement in phase margin, Equation 1 can be used.

$$\Delta\theta_{m1} = \tan^{-1} \left(2 \times \pi \times \text{UGBW} \times R_{null} \times C_L \right)$$

Where :

$\Delta\theta_{m1}$ = improvement in phase margin

UGBW = unity-gain bandwidth frequency

R_{null} = output series resistance

C_L = load capacitance

(1)

The unity-gain bandwidth (UGBW) frequency decreases as the capacitive load increases (see Figure 53). To use Equation 1, UGBW must be approximated from Figure 53.

Using Equation 1 alone overestimates the improvement in phase margin as illustrated in Figure 60. The overestimation is caused by the decrease in the frequency of the pole associated with the load, providing additional phase shift and reducing the overall improvement in phase margin. The pole associated with the load is reduced by the factor calculated in Equation 2.

$$F = \frac{1}{1 + g_m \times R_{null}}$$

Where :

F = factor reducing frequency of pole

g_m = small-signal output transconductance (typically 4.83×10^{-3} mhos)

R_{null} = output series resistance

(2)

For the TLV226x, the pole associated with the load is typically 7 MHz with 100-pF load capacitance. This value varies inversely with C_L : at $C_L = 10$ pF, use 70 MHz, at $C_L = 1000$ pF, use 700 kHz, and so on.

Reducing the pole associated with the load introduces phase shift, thereby reducing phase margin. This results in an error in the increase in phase margin expected by considering the zero alone (see Equation 1). Equation 3 approximates the reduction in phase margin due to the movement of the pole associated with the load. The result of this equation can be subtracted from the result of the Equation 1 to better approximate the improvement in phase margin.

$$\Delta\theta_{m2} = \tan^{-1} \left[\frac{\text{UGBW}}{(F \times P_2)} \right] - \tan^{-1} \left(\frac{\text{UGBW}}{P_2} \right)$$

Where :

$\Delta\theta_{m2}$ = reduction in phase margin

UGBW = unity-gain bandwidth frequency

F = factor from equation (2)

P_2 = unadjusted pole (70 MHz @ 10 pF, 7 MHz @ 100 pF, etc.)

(3)

Using these equations with Figure 60 and Figure 61 enables the designer to choose the appropriate output series resistance to optimize the design of circuits driving large capacitive loads.

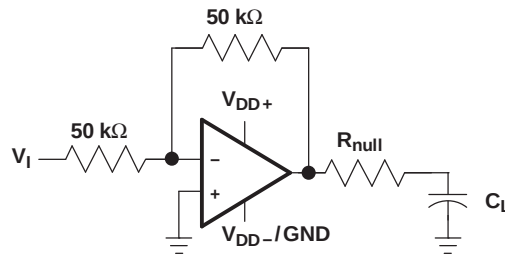


Figure 61. Series-Resistance Circuit

Macromodel Information

Macromodel information provided was derived using Microsim Parts™, the model generation software used with Microsim PSpice™. The Boyle macromodel⁽¹⁾ and subcircuit in [Figure 62](#) are generated using the TLV226x typical electrical and operating characteristics at $T_A = 25^\circ\text{C}$. Using this information, output simulations of the following key parameters can be generated to a tolerance of 20% (in most cases):

- Maximum positive output voltage swing
- Maximum negative output voltage swing
- Slew rate
- Quiescent power dissipation
- Input bias current
- Open-loop voltage amplification
- Unity-gain frequency
- Common-mode rejection ratio
- Phase margin
- DC output resistance
- AC output resistance
- Short-circuit output current limit

(1) G. R. Boyle, B. M. Cohn, D. O. Pederson, and J. E. Solomon, "Macromodeling of Integrated Circuit Operational Amplifiers," *IEEE Journal of Solid-State Circuits*, SC-9, 353 (1974).

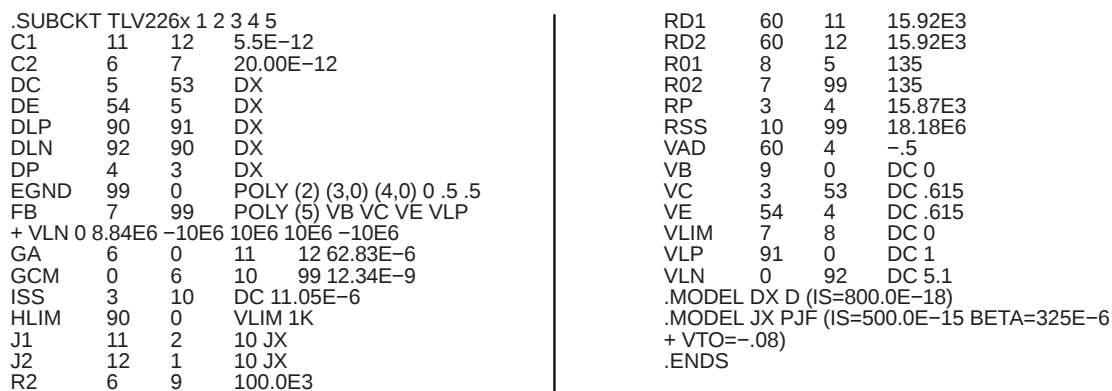


Figure 62. Boyle Macromodel and Subcircuit

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/Ball Finish	MSL Peak Temp ⁽³⁾
TLV2262AQDRQ1	OBSOLETE	SOIC	D	8		TBD	Call TI	Call TI
TLV2262AQPWRQ1	ACTIVE	TSSOP	PW	8	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TLV2262QDRQ1	OBSOLETE	SOIC	D	8		TBD	Call TI	Call TI
TLV2264AQDRQ1	OBSOLETE	SOIC	D	14		TBD	Call TI	Call TI
TLV2264AQPWRQ1	ACTIVE	TSSOP	PW	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TLV2264QDRQ1	OBSOLETE	SOIC	D	14		TBD	Call TI	Call TI

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF TLV2262-Q1, TLV2262A-Q1, TLV2264-Q1, TLV2264A-Q1 :

- Catalog: [TLV2262](#), [TLV2262A](#), [TLV2264](#), [TLV2264A](#)
- Military: [TLV2262M](#), [TLV2262AM](#), [TLV2264M](#), [TLV2264AM](#)


NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Military - QML certified for Military and Defense Applications

PW (R-PDSO-G**)

PLASTIC SMALL-OUTLINE PACKAGE


14 PINS SHOWN

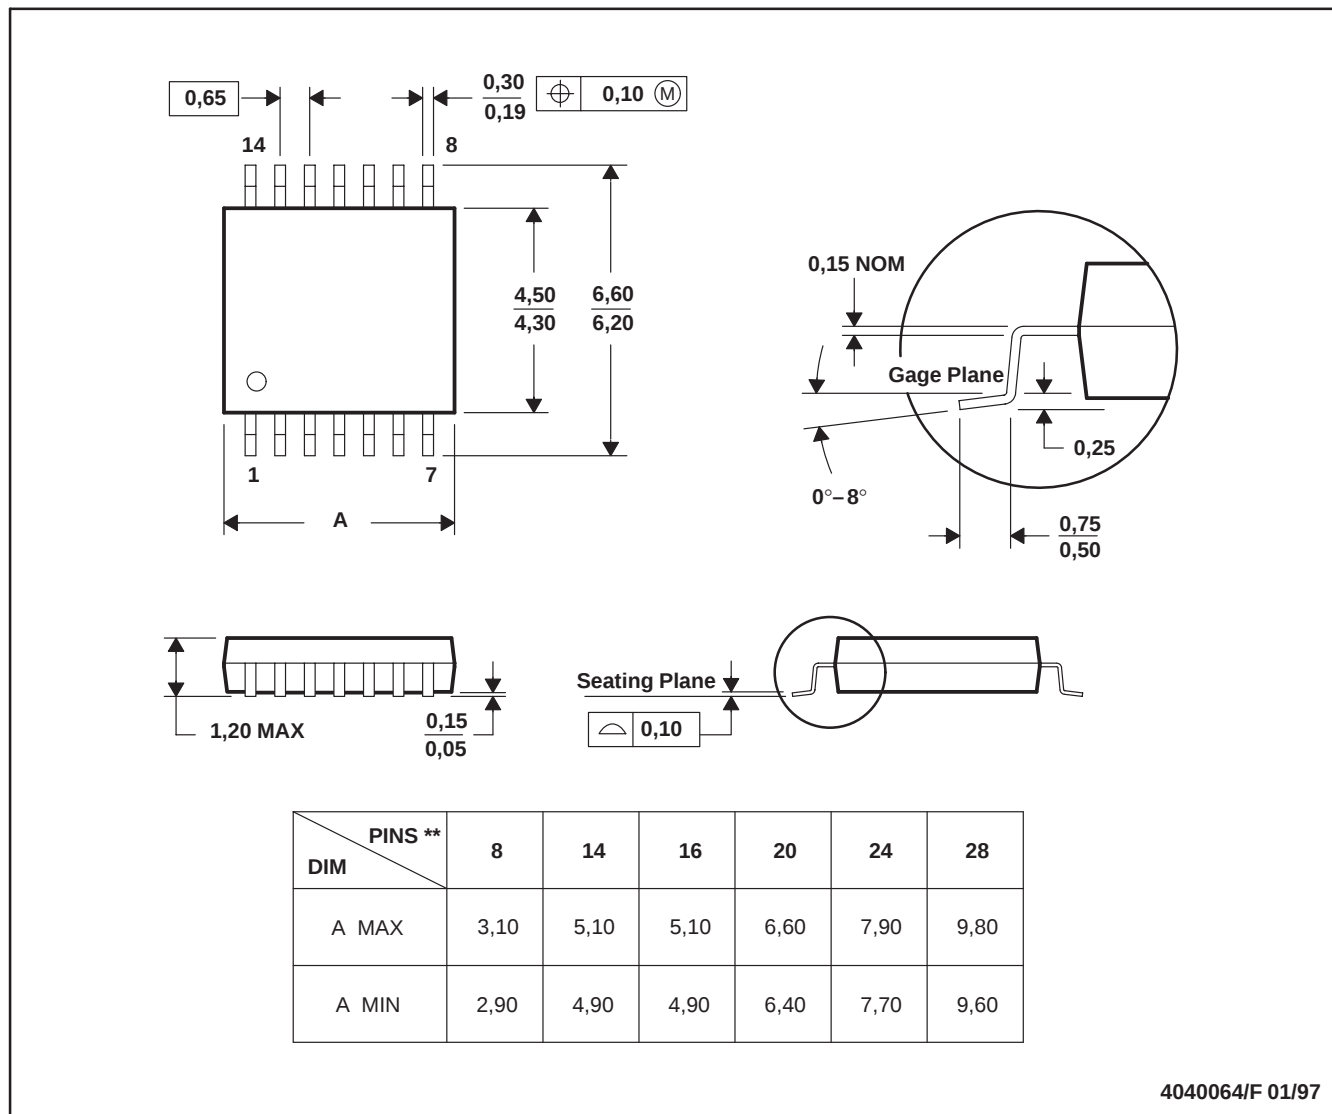

- NOTES: A. All linear dimensions are in millimeters.
 B. This drawing is subject to change without notice.
 C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.
 D. Falls within JEDEC MO-153

D (R-PDSO-G14)

PLASTIC SMALL-OUTLINE PACKAGE

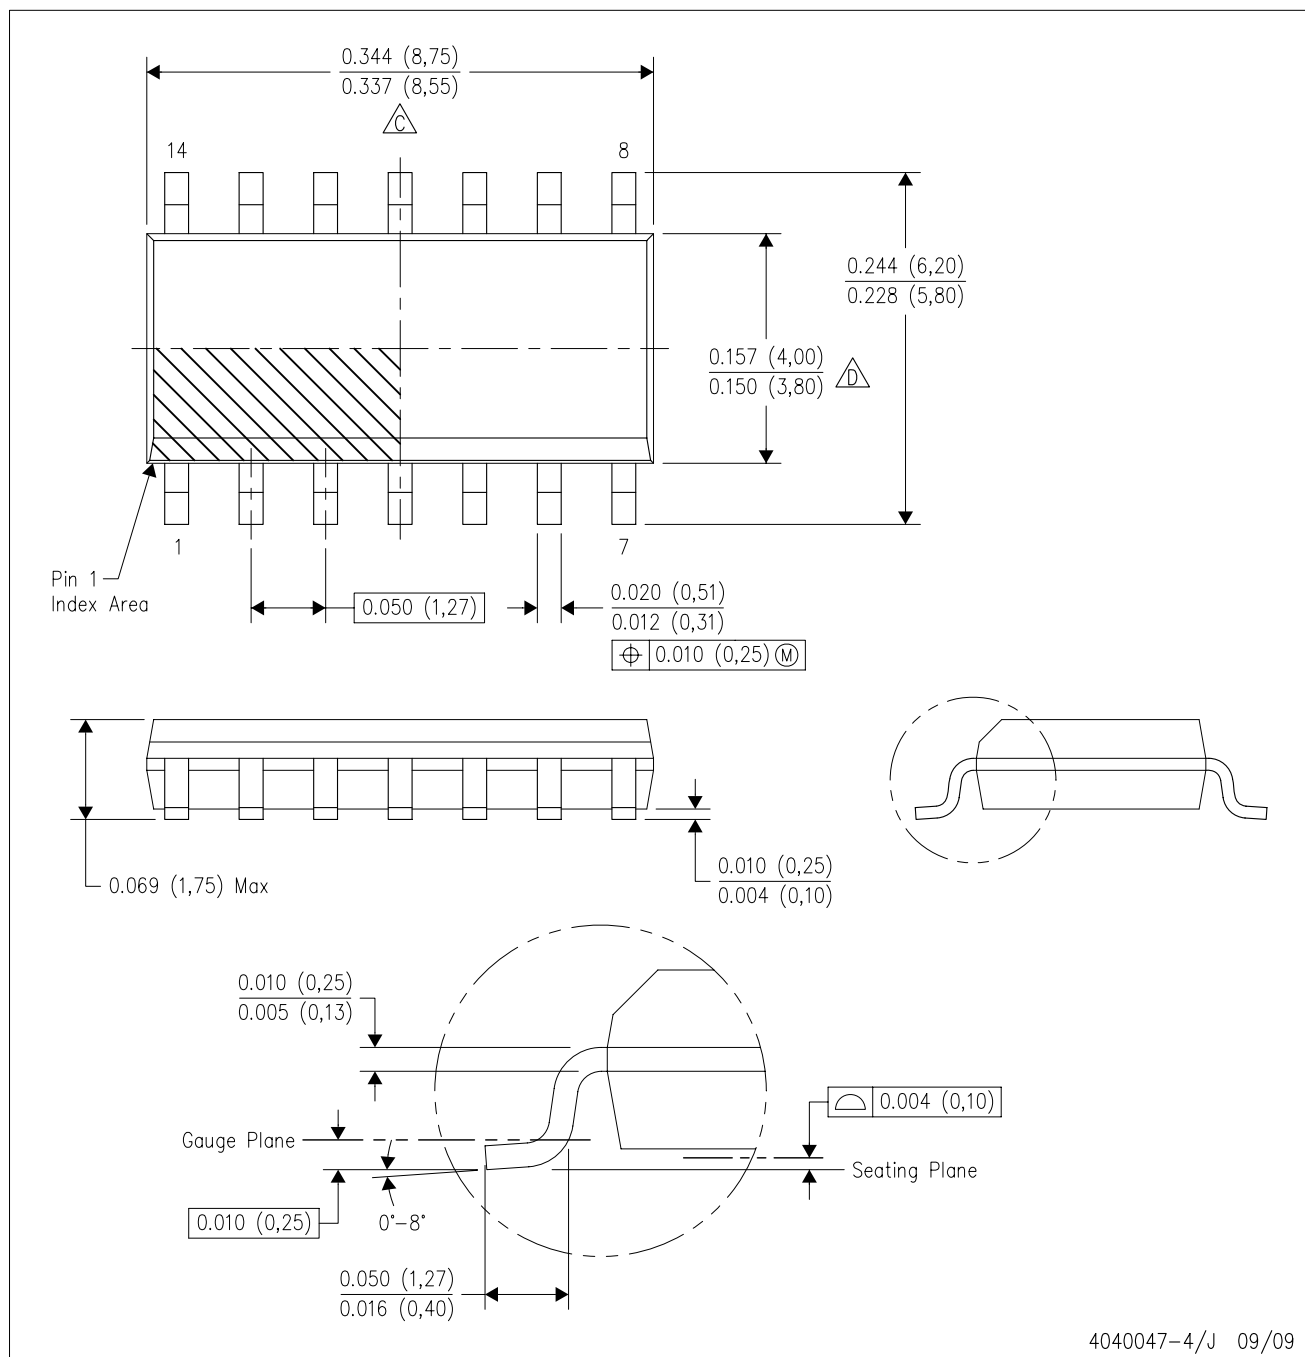


NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 (0,15) per end.
- D. Body width does not include interlead flash. Interlead flash shall not exceed .017 (0,43) per side.
- E. Reference JEDEC MS-012 variation AB.

D (R-PDSO-G8)

PLASTIC SMALL-OUTLINE PACKAGE

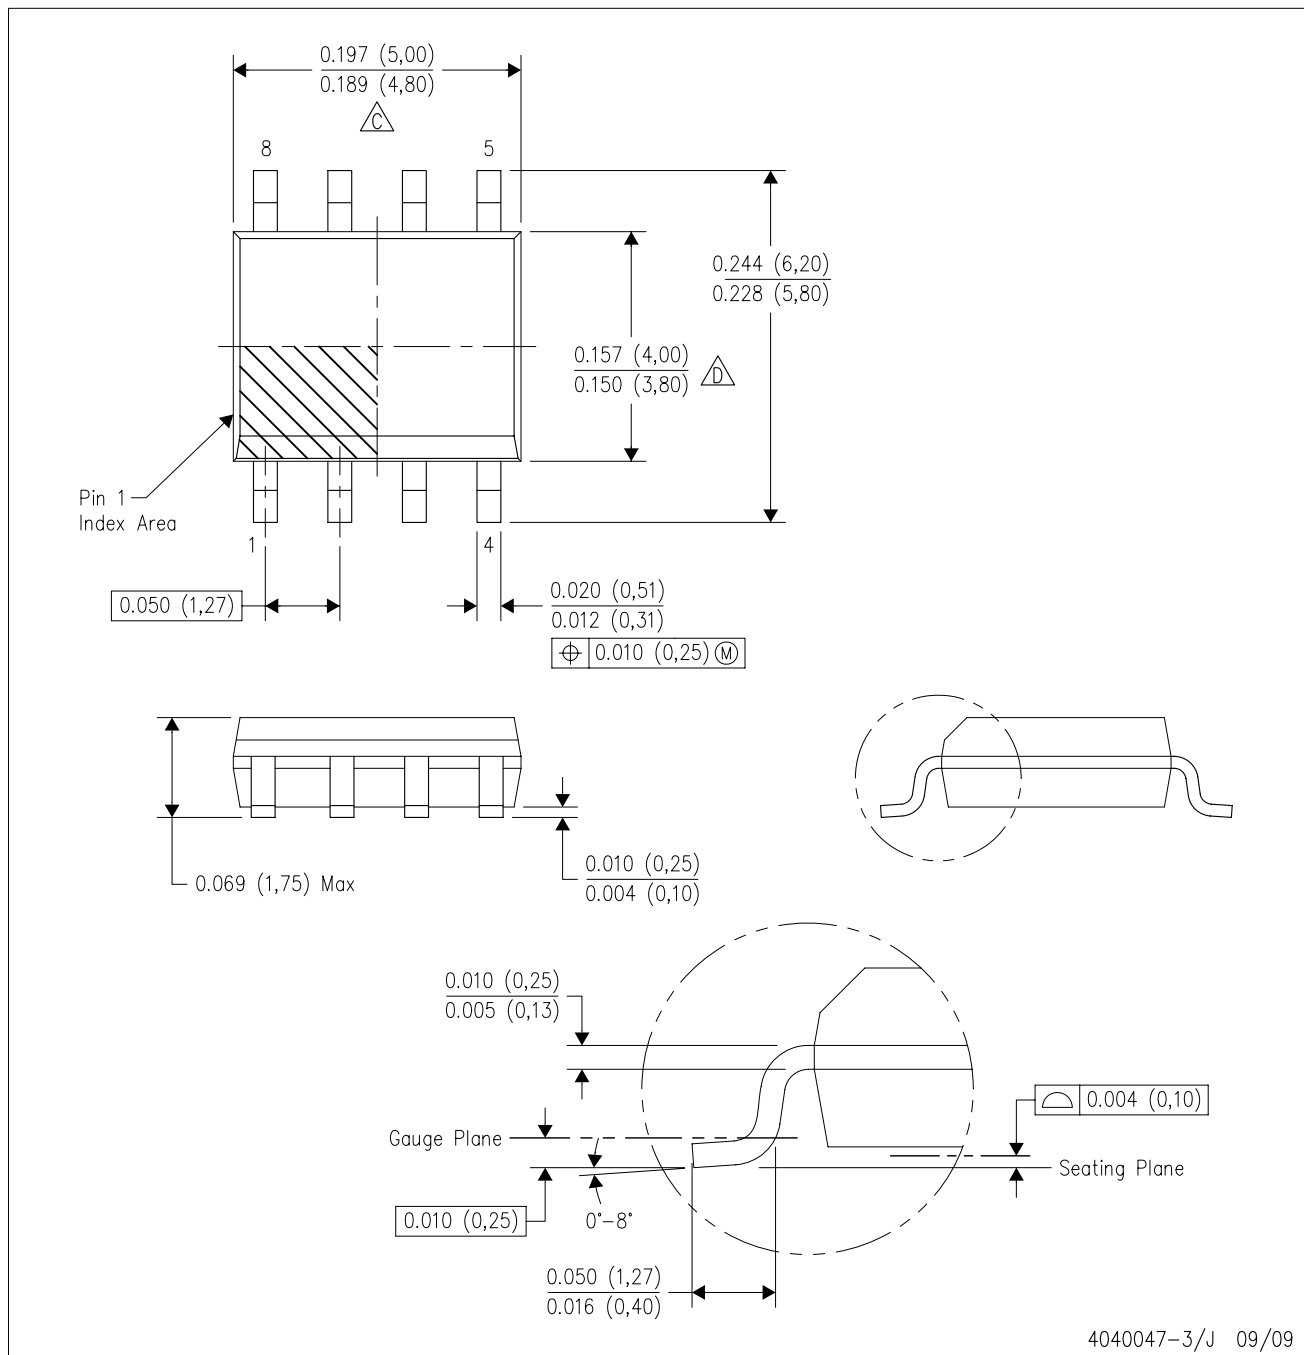

4040047-3/J 09/09

- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 -  C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 (0,15) per end.
 -  D. Body width does not include interlead flash. Interlead flash shall not exceed .017 (0,43) per side.
 - E. Reference JEDEC MS-012 variation AA.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2009, Texas Instruments Incorporated