Ceramic Monoblock Duplex Filter WIRELESS COMPONENTS


Model KFF6567A Technical Data

Features:

- Small Size
- High Performance
- SMD

Description and Applications:

This monoblock Duplexer filter is primarily designed for Cellular Band (CDMA and AMPS) applications at 824-894 MHz.

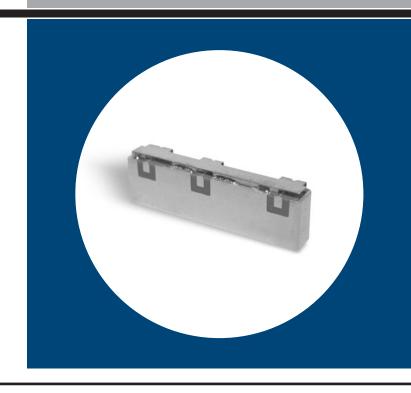

Electrical Specifications

TX to Antenna Response	Frequency	Specifications @ 25° C
Insertion Loss	824 MHz to 849 MHz	2.5 dB max.
Return Loss @ TX		10.0 dB min.
Attenuation	779 MHz to 804 MHz	10.0 dB min.
Attenuation	869 MHz to 894 MHz	45.0 dB min.
Antenna to RX Response	Frequency	Specifications @ 25° C
Insertion Loss	869 MHz to 894 MHz	3.3 dB max.
Return Loss @ RX		8.0 dB min.
Attenuation	824 MHz to 849 MHz	52.0 dB min.
Attenuation	914 MHz to 939 MHz	20.0 dB min.
Attenuation	959 MHz to 984 MHz	45.0 dB min.
Power Rating		3W
Impedance		50Ω

NOTE: Supplier shall test each filter to the critical electrical specifications listed above or better. Any subsequent audits may deviate due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:

Specification Typical Allowance

 Insertion Loss
 0.1dB


 Return Loss
 1.0dB

 Stopbands
 1.0dB




Typical Response Curve

Frequency, MHz

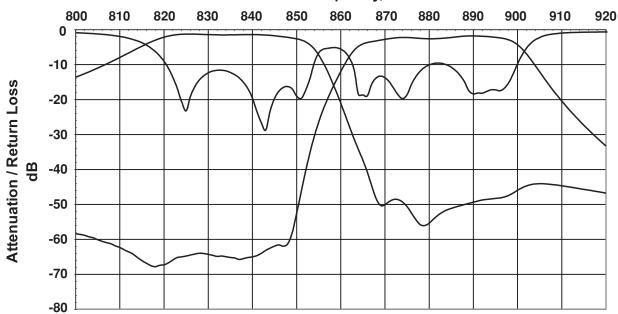

Mechanical Dimensions

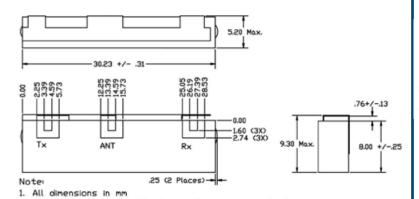


2. Tolerances are +/-.25 unless otherwise specified

Part Marking

Y = LAST DIGIT OF YEAR WW = SEQUENTIAL WEEK NUMBER



PC Board Layout



Notes:


1. All dimensions in mm

2. Tolerances are +/-.13

3. Ground plane under Tx, Rx and Antenna pads and the dielectric area that surrounds them should be at least .63 nm below top surface. There should also be no active traces under these areas.

4. Via ground holes (not shown in drawing) should be .254 mm in diameter with a pitch of 127 mm. There should be a minimum of 2 via holes per ground pad.

Packaging



- 1. Dimension "W" is equal to 44 mm (width of tape).
- 2 Dimension "P" is equal to 20 mm (pitch of tape).

Contact Information:

CTS WIRELESS COMPONENTS, INC. / 171 Covington Drive / Bloomingdale, IL 60108 PHONE: (800) 757-6686 / www.ctscorp.com

Document Control #6287114Y01 Rev. 1

Date of Origin 02/15/02 Date of Revision 02/15/02

THIS DATA SHEET IS NOT AN OFFER FOR SALE AND SHALL NOT OBLIGATE CTS TO SELL THE PRODUCTS DESCRIBED HEREIN OR ANY OTHER PRODUCTS. CTS MAY, IN ITS SOLE DISCRETION, MODIFY OR DISCONTINUE THE SALE OF ITS PRODUCTS AT ANY TIME WITHOUT NOTICE. CTS MAKES NO WARRANTY, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WITH RESPECT TO THE PRODUCTS REFERENCED OR INFORMATION PROVIDED HEREIN.