

ADS548xEVM

User's Guide



Literature Number: SLAU207
August 2008

1	Overview.....	5
1.1	Purpose.....	5
1.2	EVM Quick-Start Procedure	5
1.3	Power Requirements	5
1.4	ADS548xEVM Operational Procedure	6
2	Circuit Description	7
2.1	Schematic Diagram	7
2.2	Circuit Function	7
3	Evaluation	13
3.1	TSW1200 Capture Board.....	13
3.2	Quick-Test Results	13
3.3	Test Result With Onboard VCXO and Clock Through Crystal Filter.....	14
3.4	Test Result With Onboard VCXO and Differential LVPECL Clock.....	15
3.5	Using THS4509	15
4	Physical Description	17
4.1	PCB Schematics.....	18
4.2	PCB Layout.....	22
4.3	Bill of Materials.....	29
	Important Notices	32

List of Figures

1	CDCE72010 EEPROM Configuration Block Diagram	10
2	TSW1200 GUI Introduction	13
3	Quick-Setup Test Result	14
4	ADC Performance With Clock Through Onboard VCXO, CDCE72010, and Crystal Filter	14
5	ADC Performance With Clock Through Onboard VCXO, CDCE72010 Configured for Differential LVPECL Output.....	15
6	Simulated Filter Response	16
7	On-Bench Filter Response	16
8	ADC Performance With THS4509	17
9	EVM Schematics, Sheet 1	18
10	EVM Schematics, Sheet 2	19
11	EVM Schematics, Sheet 3	20
12	EVM Schematics, Sheet 4	21
13	EVM Schematics, Sheet 5	22
14	Component Side.....	23
15	Ground Plane 1.....	24
16	Power Plane 1	25
17	Power Plane 2	26
18	Ground Plane 2.....	27
19	Bottom Side	28

List of Tables

1	Jumper List	6
2	EVM Power Supply Jumper Description.....	7
3	EVM Power Supply Options.....	7
4	Clock Input Jumper Description.....	9
5	EVM Clock Input Options	9
6	Analog Input Jumper description	10
7	EVM Analog Input Options	11

ADS548xEVM

1 Overview

This ADS548x evaluation module (EVM) user's guide gives an overview of the EVM and provides a general description of the features and functions to be considered while using this module.

1.1 Purpose

The ADS548xEVM provides a platform for evaluating the analog-to-digital converter (ADC) under various signal, reference, and supply conditions. Use this document in combination with the EVM schematic diagram supplied.

1.2 EVM Quick-Start Procedure

Power Supply

Power connections to the EVM are supplied by banana jack sockets. Separate banana jack sockets are provided for the ADC supplies and for the differential amplifier power supply.

Clock

The EVM provides an external SMA connector for input of the ADC clock. The single-ended input is converted into a differential signal at the input of the device. The clock also can be provided by onboard VCXO and CDCE72010.

Analog Inputs

The analog input to the ADC is provided by a external SMA connector. The input can be supplied to the ADC through two paths: one input path uses a THS4509 amplifier, whereas the other input is ac-coupled. In both cases, the user supplies a single-ended input or differential input(SMA connector which is not populated in the EVM). If the single-ended configuration is used, the signal is converted into the differential signal before the ADC.

1.3 Power Requirements

The EVM can be powered directly from 5 V for the ADC analog supply, or EVM jumper settings can be modified to use the onboard power solution from Texas Instruments (TI). The input power supply voltage range for the EVM can be 6 V to 36 V, only if the onboard TI power solution is used.

CAUTION

Voltage Limits: Exceeding the maximum input voltages can damage EVM components. Undervoltage may cause improper operation of some or all of the EVM components.

1.4 ADS548xEVM Operational Procedure

The ADS548xEVM provides a flexible means of evaluating the ADS548x in various modes of operation. A quick-setup procedure follows.

1. Verify all jumper settings against the schematic jumper list in [Table 1](#).

Table 1. Jumper List

Jumper	Function	Jumper Setting
Interface Circuit Operational Amplifier THS4509		
SJP1	AMP_OUT+	2-3
SJP2	AMP_OUT–	2-3
JP3	PD	2-3
SJP4	AMPIN–	1-2
ADC Circuit		
JP4	PWRDWN_FAST	2-3
JP5	PWRDWN_SLOW	2-3
JP6	DITHER_ENABLE	2-3
Clock Interface circuit		
SJP6	CLOCKIN	1-2
SJP7	CLOCKIN, Y0, Y1P SELECT	1-2
SJP8	Y1N SELECT	1-2
J14	PWRDWN CDC	1-2
Power Supply		
JP12	3.3VA_IN	1-2
JP13	3.3VD_IN	1-2
JP14	5V_IN	1-2
JP15	TPS79501 INPUT SELECT	1-2
JP16	5V_AUX	2-3
JP17	TPS5420 INPUT SELECT	NO SHUNT

2. Connect the 5-V supply between J5 and J6 (GND). If you are using the TSW1200 for capture, it can also be used to source 5 V for the EVM. On the TSW1200, configure JP8 to short 1-2 and J22 to short 1-2 and jumper over 5 V from the banana jacks on the TSW1200 to J5 on the ADC EVM. Do not connect voltage source greater than 5.5 V.
3. Switch on power supplies.
4. Using a function generator with 50-Ω output impedance, generate a 0-V offset, 1.5-Vpp sine-wave clock into J12. The frequency of the clock must be within the specification for the device speed grade.
5. Use a frequency generator with a 50-Ω output impedance to provide a 0-V offset, –1-dBFS-amplitude sine-wave signal into J1. This provides a transformer-coupled differential input signal to the ADC.
6. Connect the TSW1200 or suitable logic analyzer to J4 to capture the resulting digital data. If you connect a TSW1200 to capture data, follow the additional alphabetically labeled steps. For more information, see [Section 3](#).
 - a. After installing the TSW1200 software and connecting the TSW1200 to the USB port, open the TSW1200 software.
 - b. Depending on the ADC under evaluation, select from the “TI ADC Selection” pulldown.
 - c. Change the “ADC Sample Rate” and “ADC Input Frequency” to match those of the signal generator.
 - d. After selecting a Single Tone FFT test, press the “Capture Data” button.

2 Circuit Description

2.1 Schematic Diagram

The schematic diagram for this EVM is attached at the end of this document. See the schematic before changing any jumpers.

2.2 Circuit Function

The following sections describe the function of individual circuits. See the relevant data sheet for device operating characteristics.

2.2.1 Power

Power is supplied to the EVM through a TI power solution. Although various power options are available on this EVM, care should be taken while applying power on J5 as different options have different voltage ranges specified. [Table 2](#) displays the general jumper setting information; [Table 3](#) displays the various power option settings. Prior to making any jumper settings, see the [Figure 12](#) schematic.

Table 2. EVM Power Supply Jumper Description

EVM Banana Jack	Description	Jumper setting
J5	Input	6-V to 36-V power supply; default - apply just 5 V
JP12	3.3VA_IN	1-2 → Connect 3.3-V AVdd to TPS79633 output; 2-3 → Ground
JP13	3.3VD_IN	1-2 → Connect 3.3-V DVdd to TPS79633 output; 2-3 → Ground
JP14	5V_IN	1-2 → Connect 5-V AVdd to 5V_Aux; 2-3 → Ground
JP15	TPS79501 INPUT SELECT	1-2 → Connects 5.3 V to ip of TPS79501; 2-3 → TPS79501 ip connected to J5
JP16	5V_AUX	1-2 → TPS79501 op as 5v_Aux rails; 2-3 → 5V_aux rail connected to J5
JP17	TS5420 INPUT SELECT	Shunt → J5 connected to TPS5420D

Table 3. EVM Power Supply Options

EVM Option	Evaluation Goal	Jumper Changes Required	Voltage on J5	Comments
1	Evaluate ADC performance using a cascaded switching power supply (TPS5420D) and LDO solution (TPS79501DCQ)	JP12 → 1-2; JP13 → 1-2; JP14 → 1-2; JP15 → 1-2; JP16 → 1-2; JP17 → 1-2;	6-36V	Maximum performance and efficiency.
2	Evaluate ADC performance using a LDO-based solution.	JP12 → 1-2; JP13 → 1-2; JP14 → 1-2; JP15 → 1-2; JP16 → 2-3, JP17 → No shunt;	5.1-5.5V	Max performance.
3	Evaluate ADC performance using an isolated ADC AVDD and DVDD for current consumption measurements	JP12 → connect 3.3V to pin 2 of Jumper; JP13 → connect 3.3V to pin 2 of Jumper; JP14 → connect 5.5V to pin 2 of Jumper and ground to J6; JP15 → No shunt ; JP16 → No shunt ; JP17 → No shunt;	Do not apply power on J5.	Isolated power supply for current consumption measurements

2.2.1.1 Power Supply Option 1

Option 1 supplies the power to the ADC using cascaded topology of the TPS5420D and the TPS79501DCQ. The TPS5420 is a step-down converter which works with the input voltage in the range 6 V to 36 V. The switching supply increases efficiency for higher input voltages but does create noise on the

voltage supplies. To reduce the noise, an ultralow-noise, high-PSSR LDO TPS79501DCQ is used to clean the power supply. The TPS5420D is designed for output of 5.3 V, which acts as input for TPS79501. The TPS79501 is designed to output a 5-V output, which is the AVDD for the ADC. This voltage rail is input to the LDO TPS79633, which outputs 3.3 V, used for DVDD for the ADC. A separate TPS79633 is designed to output 3.3 V for the CDCE72010 power supply rail. This solution adds two features to the EVM: one is to increase the range of the power supply on jumper J5 from 6 V to 36 V, allowing the user to choose any power supply source in the specified range without causing significant power dissipation. The other feature is that the output voltage rail has a much lower ripple, ensuring the better performance of the part even when the power source is fluctuating.

2.2.1.2 Power Supply Option 2

Option 2 supplies power to the ADC using the LDOs TPS79633DCQ and TPS79601DCQ. The LDOs limits the power supply on J5 to be in the range 5.1 V to 5.5 V only. This option again has the output voltage much cleaner as the LDOs chosen have high PSSR and low noise. Care must be taken while powering up the EVM using this option, as higher voltage or reverse polarity may damage the EVM.

2.2.1.3 Power Supply Option 3

Option 3 is used to evaluate ADC performance using an isolated AVDD and DVDD power supply for current consumption measurements. This option must be used with caution as reversing the power supply or connecting to the wrong connector can result in damage to the EVM.

2.2.2 Clock Input

The clock can be supplied to the ADC in two ways: one is from J12 directly, and the other by using the onboard VCXO and CDCE72010. Also, the clock supply to the ADC from CDCE72010 can be configured for a single-output clock from the CDCE72010 with a crystal filter, or one can use the differential LVPECL clock output. For better performance, the clock through a crystal output is recommended. Prior to making any jumper settings, see the [Figure 13](#) schematic. [Table 5](#) displays the various clock option settings.

Table 4. Clock Input Jumper Description

EVM Banana Jack	Description	Jumper setting
J11	ENABLE VCXO1 TC0-2111	1-2 → VCXO enabled 2-3 → VCXO Disabled
J12	Clock supply	
J14	CDCE72010 power down	1-2 → CDCE72010 is power Down; Open → CDCE72010 is On
J15	CDCE72010 Reset	1-2 → Reset , Open → Normal operation. (Default)
SJP6	Clock In or CDC Ref. Jumper	1-2 → J12 supplies clock directly to ADC; 2-3 → Reference clock for CDCE72010
SJP7	Clock input to +ve terminal of T4 for ADC clock	1-2 → Connects J12 to ADC; 3-4 → Connects Y0 output of CDCE72010 (This path has crystal filter) to ADC; 5-6 → Connects Y1P (Differential LVPECL clock output of CDCE72010) to ADC
SJP8	Clock input to -ve terminal of T4 for ADC clock	1-2 → Connects to ground (Default); 2-3 → Connects to Y1N (Differential clock output of CDCE72010) only to be used with Y1P.
SJP9	Mode select pin for CDCE72010	1-2 → High (default), see data sheet of CDCE72010; 2-3 → Ground
SJP10	PLLOCK LED	1-2 → Connects to D1 diode; 2-3 → Ground through 10-nF capacitor
SJP11	Aux_sel pin for CDCE72010	1-2 → High, see data sheet of CDCE72010; 2-3 → Ground (Default)

Table 5. EVM Clock Input Options

EVM Option	Evaluation Goal	Jumper Changes Required	Frequency input on J12	CDC configuration description	Comments
1	Evaluate ADC performance using a sinusoid clock.	J11 → 2-3; SJP6 → 1-2; SJP7 → 1-2; SJP8 → 1-2; J14 → 1-2; J15 → No shunt;	ADC's Sampling Frequency	NA	default
2	Evaluate ADC performance using a crystal filtered LVCMOS clock derived from CDCE72010	J11 → 1-2; SJP6 → 2-3; SJP7 → 3-4; SJP8 → 1-2; J14 → No shunt; J15 → No shunt;	10M for VCXO@491.5 2Mhz	Divide VCXO frequency by 4, output on Y0	Max performance.
3	Evaluate ADC performance using a differential LVPECL clock	J11 → 1-2; SJP6 → 2-3; SJP7 → 5-6; SJP8 → 2-3; J14 → No shunt; J15 → No shunt;	10M for VCXO@491.5 2Mhz	Divide VCXO frequency by 4, differential LVPECL Clock output on Y1P and Y1N	Not recommended for most applications

2.2.2.1 Clock Option 1

The Clock Option 1 provides a clock to ADC directly from an external source. For the direct supply of the clock to the ADC, a single-ended square or sinusoidal clock input must be applied to J12. The clock frequency must be within the maximum frequency specified for the ADC. The clock input is converted to a differential signal by a Mini-Circuits™ ADT4-1WT, which has an impedance ratio of 4, implying that voltage applied on J12 is stepped up by a factor of 2. ADC performance in this case depends on the clock source quality. This option is also the default configuration on the EVM, when it is shipped from the factory. The test result using this option is shown in [Figure 3](#).

2.2.2.2 Clock Option 2

Option 2 uses the onboard VCXO and CDCE72010 to provide a clock to the ADC. The CDCE72010 is used in SPI mode which uses the internal EEPROM to configure the CDCE72010. The EEPROM is programmed in the factory for a divide-by-4 configuration. The EEPROM configuration is shown in [Figure 1](#). The clock at J12 is the reference clock for CDCE72010. The VCXO frequency can be calculated as $F_{vcxo} = F_{out} \times 4$ (F_{out} is the frequency output U0 and U1). The reference clock for CDCE72010 is calculated from Ref Clock = $(F_{vcxo} \times 125)/(48 \times 128)$. (This is the clock-to-M divider.) When VCXO of frequency 491.52 MHz is used, the calculation results in a reference clock of 10 MHz; the clock output on

Table 6. Analog Input Jumper description (continued)

EVM Banana Jack	Description	Jumper setting
J2	Analog input, can be used with J1 for differential input	Not populated
J7	Power supply +	Apply 5V
J9	Power Supply -	Ground.
SJP1	AMP OUT+, +v terminal of T1	1-2 → Amp out+ is selected as the source of input to ADC; 2-3 → Use Analog input from J1 as signal source to ADC (Use with appropriate SJP4 setting)
SJP2	AMP OUT—, –v terminal of T1	1-2 → Amp out+ is selected as the source of input to ADC; 2-3 → Ground, (Default) Also can be used to connect J2 as a differential input along with SJP1 and SJP3 setting.
SJP3	INPUT –ve select	1-2 → J2 supplies the analog signal to ADC; 2-3 → +ve Input to amplifier. DEFAULT is No Shunt
SJP4	INPUT +ve select	1-2 → J1 supplies the analog signal to ADC. 2-3 → –ve Input to amplifier.
JP3	Power down for amplifier THS4509	1-2 → Pulls up the pin (Normal operation or amplifier is ON); 2-3 → Grounds the pin (Low-power mode or amplifier is off)

Table 7. EVM Analog Input Options

EVM Option	Evaluation Goal	Jumper Changes Required	Voltage on J7 and J9	Analog signal to ADC	Comments
1	Evaluate ADC performance using direct input to ADC.	SJP1 → 2-3; SJP2 → 2-3; SJP3 → No shunt; SJP4 → 1-2; JP3 → 2-3;	Do not connect	From J1	default
2	Evaluate ADC performance using input through THS4509	SJP1 → 1-2; SJP2 → 1-2; SJP3 → No shunt; SJP4 → 2-3; JP3 → 1-2;	J7 → 5V, J9 → GND	Signal from J1 is amplified by THS4509	Used if input signal requires amplification.

2.2.3.1 Analog Input Option 1

Option 1 supplies the transformer coupled input from J1 to ADC. This configuration is the default on the EVM. The test result using this option is shown in [Figure 3](#).

2.2.3.2 Analog Input Option 2

Option 2 allows the use of an amplifier to provide input to the ADC. TI has a range of wideband operational amplifiers such as THS4508/09/11/13/20. On this EVM, THS4509 is used as an example to amplify the input from J1. The THS4509 is powered up by applying 5 V to J7 and GND to J9. You can also use a differential power supply to power up the amplifier; see the THS4509 data sheet ([SLOS547](#)). The output of the THS4509 is filtered through a band-pass filter before ADC input. The band-pass filter can be designed depending on the end application. By default, the band-pass filter components are not populated as the filter design depends on the end application. The TI schematic provides an example of a filter that is designed for the frequency band of 10 MHz to 58 MHz. When using the suggested filter, be sure to change the R2 and R6 resistors to 200 Ω. A key point when designing a filter is to design it for proper load termination. Care must be taken when supplying the input to the board, and ensure that the source impedance is 50 Ω. Results may vary due to mismatching of the various source and termination impedances. The evaluation result for the ADC5483 using THS4509 is shown in [Figure 8](#).

2.2.4 Digital Outputs

The LVDS digital outputs can be accessed through the J4 output connector. A parallel 100- Ω termination resistor must be placed at the receiver to properly terminate each LVDS data pair. These resistors are required if the user wants to analyze the signals on an oscilloscope or a logic analyzer. The ADC performance also can be quickly evaluated using the TSW1200 boards as explained in next section.

3 Evaluation

3.1 TSW1200 Capture Board

The TSW1200 board can be used to analyze the performance of the EVM. The TSW1200EVM is a circuit board that assists designers in prototyping and evaluating the performance of high-speed ADCs that feature parallel or serialized LVDS outputs. The TSW1200 has the LVDS 100- Ω termination resistor on the input interface for ADC outputs.

To start the TSW1200 software, note the following points.

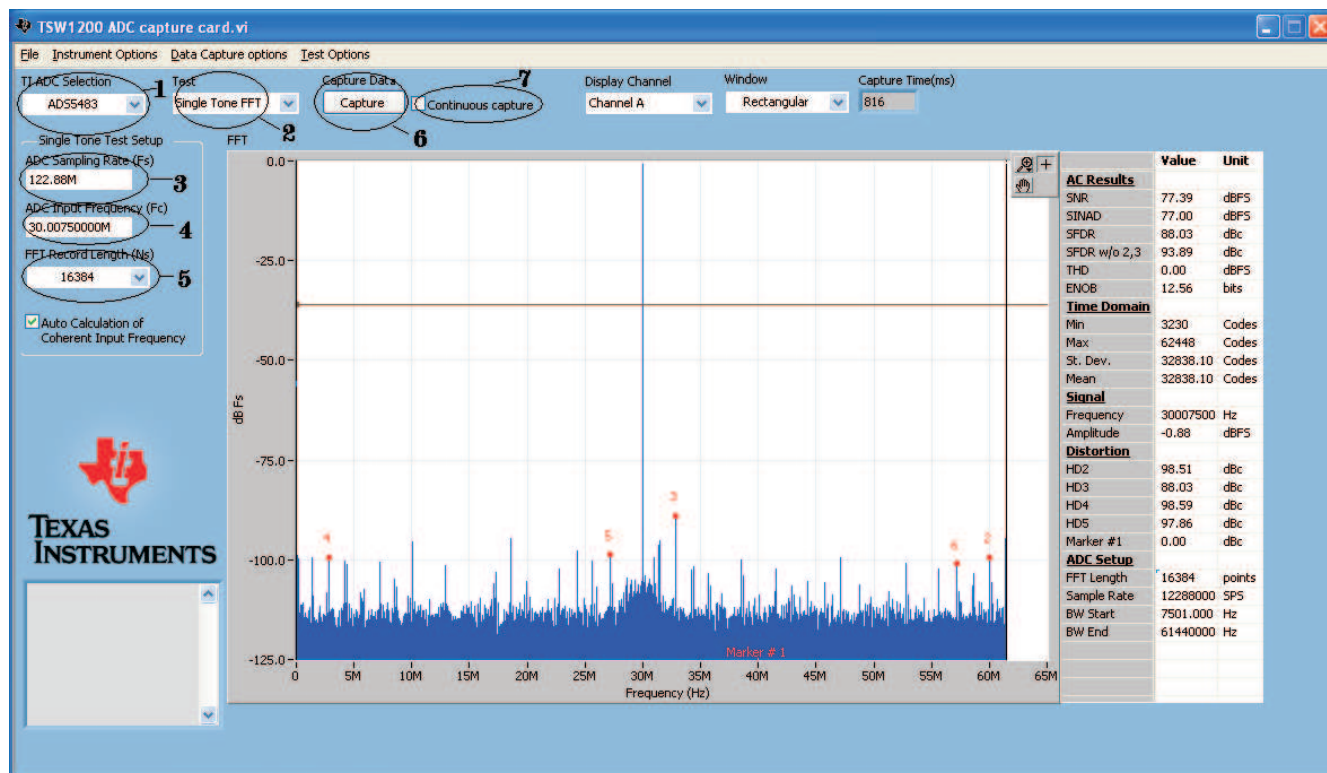


Figure 2. TSW1200 GUI Introduction

1. Select the ADC type to be used before capturing.
2. For test, select Single Tone FFT plot.
3. For the ADC Sampling Rate, type in the value.
4. Type in the ADC Input Frequency. Auto calculation of the input frequency depends on the FFT record length. As soon as the number is entered, the software calculates the coherent input frequency corresponding to that FFT length. This frequency signal must be supplied through the signal generator.
5. Select the FFT Record Length.
6. Select Capture to obtain the plot
7. The Continuous Capture option is used if the user wants to continuously capture the FFT.

Be sure to adjust the input level signal to attain the dBFS of approximately -1.

3.2 Quick-Test Results

The user can make the jumper setting as mentioned in [Table 1](#). In this configuration, the EVM uses an external clock source from J12 and a direct input signal J1 to the ADC. This setup uses Power Option 2 ([Table 3](#)), Clock Option 1 ([Table 5](#)) and Analog Input Option 1 ([Table 7](#)), which is the default on the EVM. [Figure 3](#) shows the ADC performance capture using TSW1200 with the input signal of a 100-MHz frequency and clock frequency of 122.88 MHz with ADS5483.

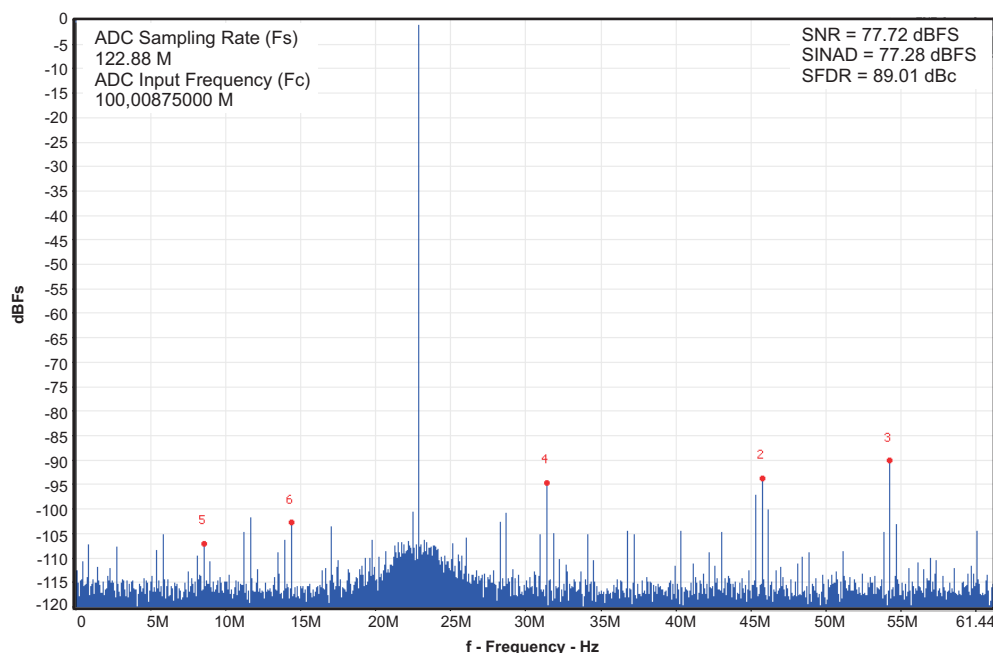


Figure 3. Quick-Setup Test Result.

3.3 Test Result With Onboard VCXO and Clock Through Crystal Filter

This test uses the VCXO of frequency 491.52 MHz. This setup uses the Power Option 2 (Table 3), Clock Option 2 (Table 5) and Analog Input Option 1 (Table 7). For this test, the CDCE72010 crystal filter path was chosen to provide the clock to the ADC. The CDCE72010 provides a single-ended clock through output Y0 (Table 5), which is passed through a crystal filter of center frequency 122.88 MHz. This was the example setup; the VCXO and the crystal filter are not populated on the EVM as the values depend on the end application sampling rate. The capture result for ADS5483 is as shown in Figure 4.

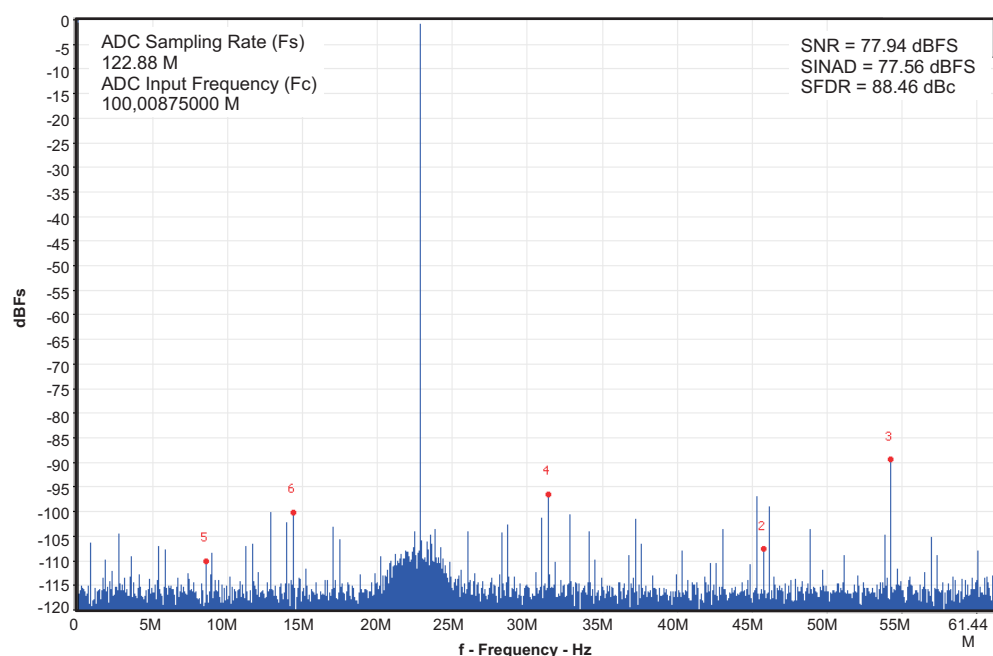


Figure 4. ADC Performance With Clock Through Onboard VCXO, CDCE72010, and Crystal Filter

3.4 Test Result With Onboard VCXO and Differential LVPECL Clock

For the same setup as explained in the previous section, when Clock Option 3 (Table 5) was used, the FFT was captured as shown in Figure 5. The test results with Clock Option 2 are better than with Clock Option 3. That is why Option 2 (clock with crystal filter) is recommended over the differential LVPECL output.

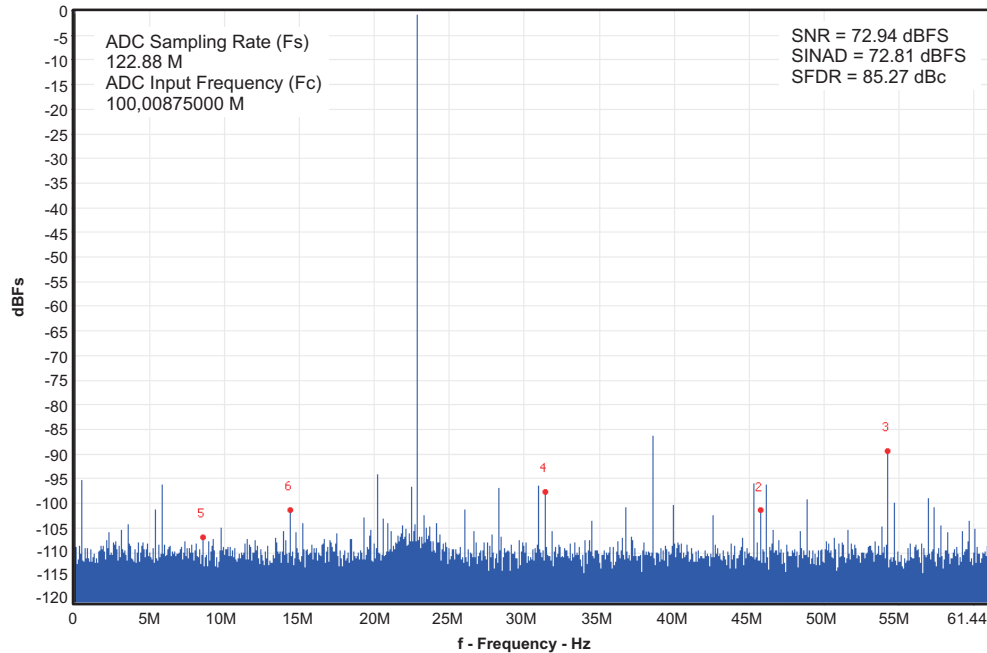


Figure 5. ADC Performance With Clock Through Onboard VCXO, CDCE72010 Configured for Differential LVPECL Output

3.5 Using THS4509

The THS4509 can be used to interface between the input signal on J1 to the input of ADC. In this setup, Power Option 2 (Table 3), Clock Option 1 (Table 5), and Analog Input Option 2 (Table 7) are used. The bandpass filter on the output of the THS4509 can be designed for the range of input frequencies. In this case, it is designed for 10 MHz to 58 MHz; the TI schematic contains the suggested values for the same bandwidth.

The bandpass-filter responses with the THS4509 were simulated using TINA-TI™. Figure 6 shows the simulated filter response.

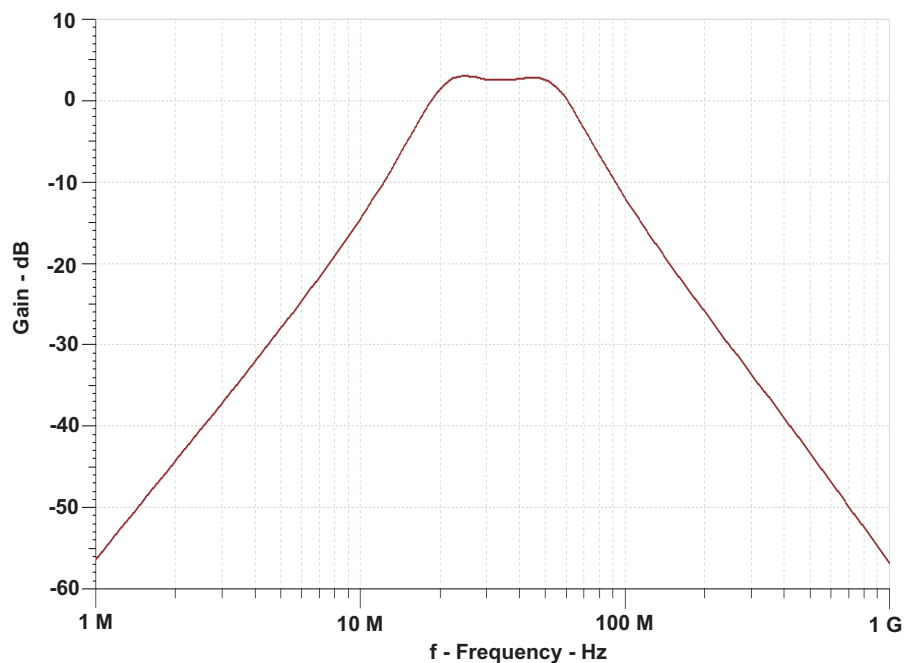


Figure 6. Simulated Filter Response

The same circuit was tested on the bench with ADS5483, for the frequency response as shown in [Figure 7](#).

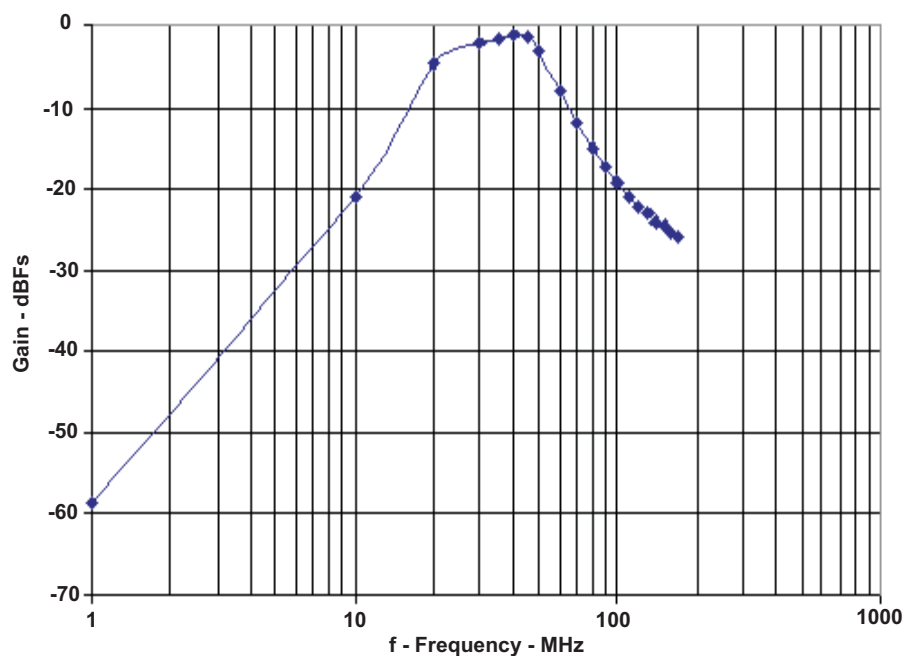


Figure 7. On-Bench Filter Response

The result was captured using the TSW1200 for the input frequency of 57.6 MHz and the sampling frequency of 122.88 MHz.

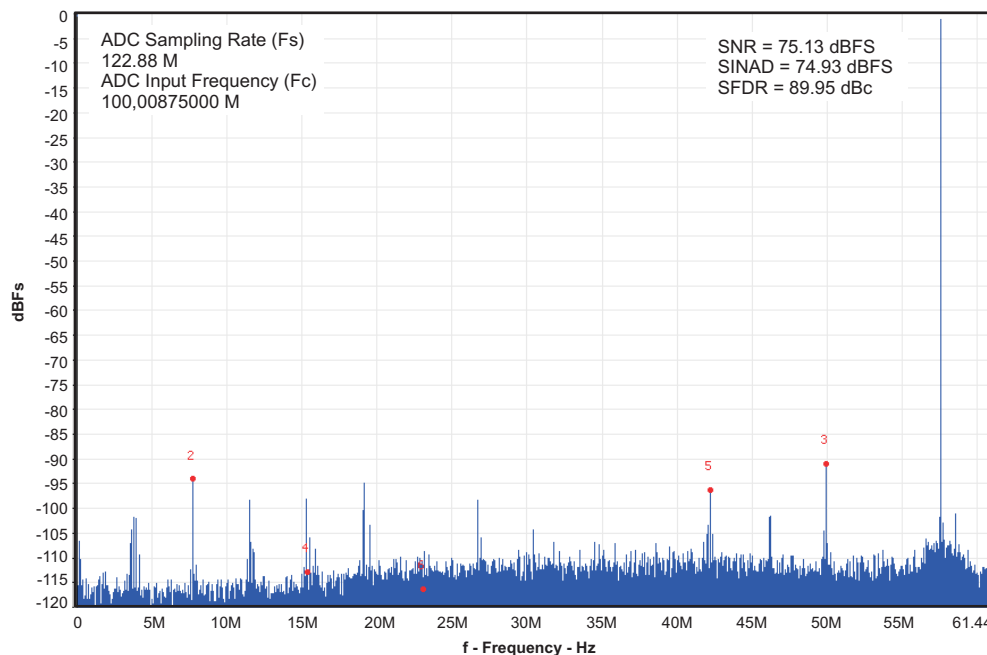


Figure 8. ADC Performance With THS4509

4 Physical Description

This section describes the physical characteristics and printed-circuit board (PCB) layout of the EVM.

4.1 PCB Schematics

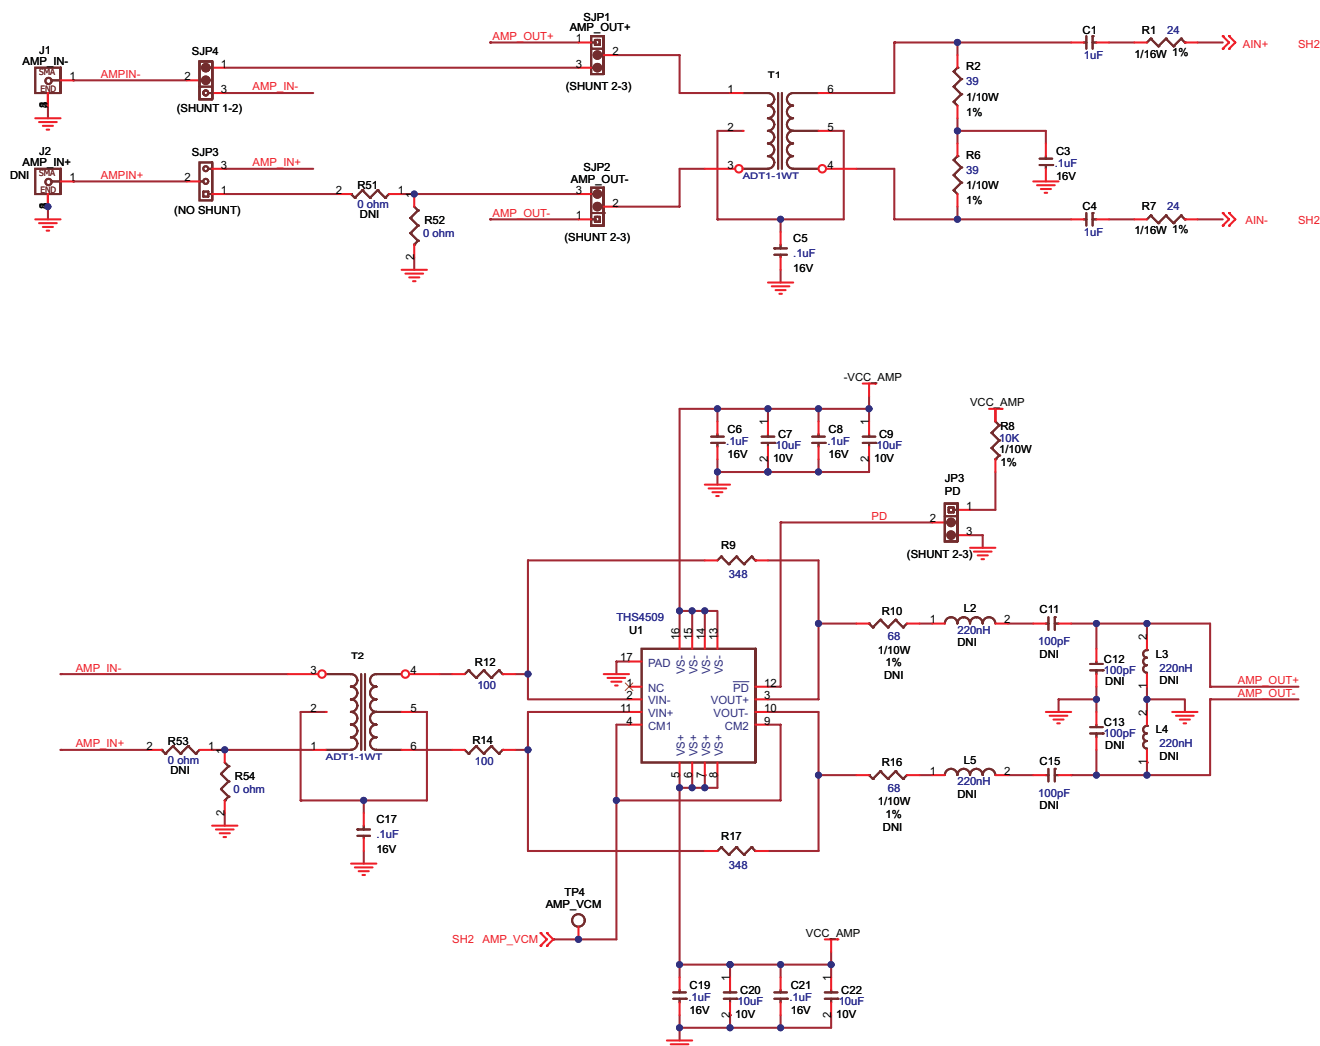


Figure 9. EVM Schematics, Sheet 1

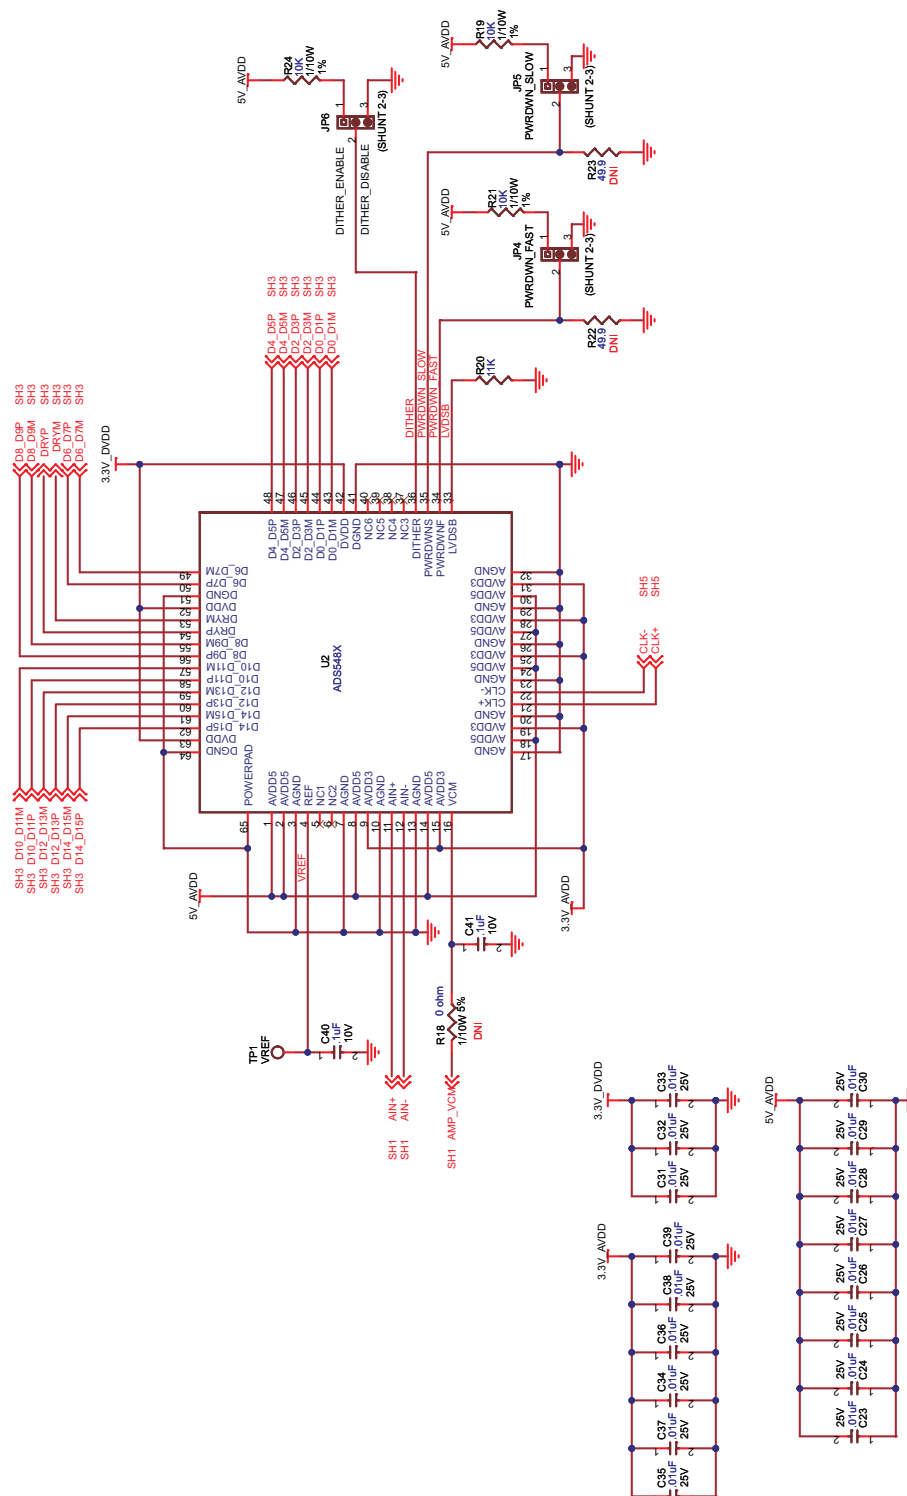


Figure 10. EVM Schematics, Sheet 2

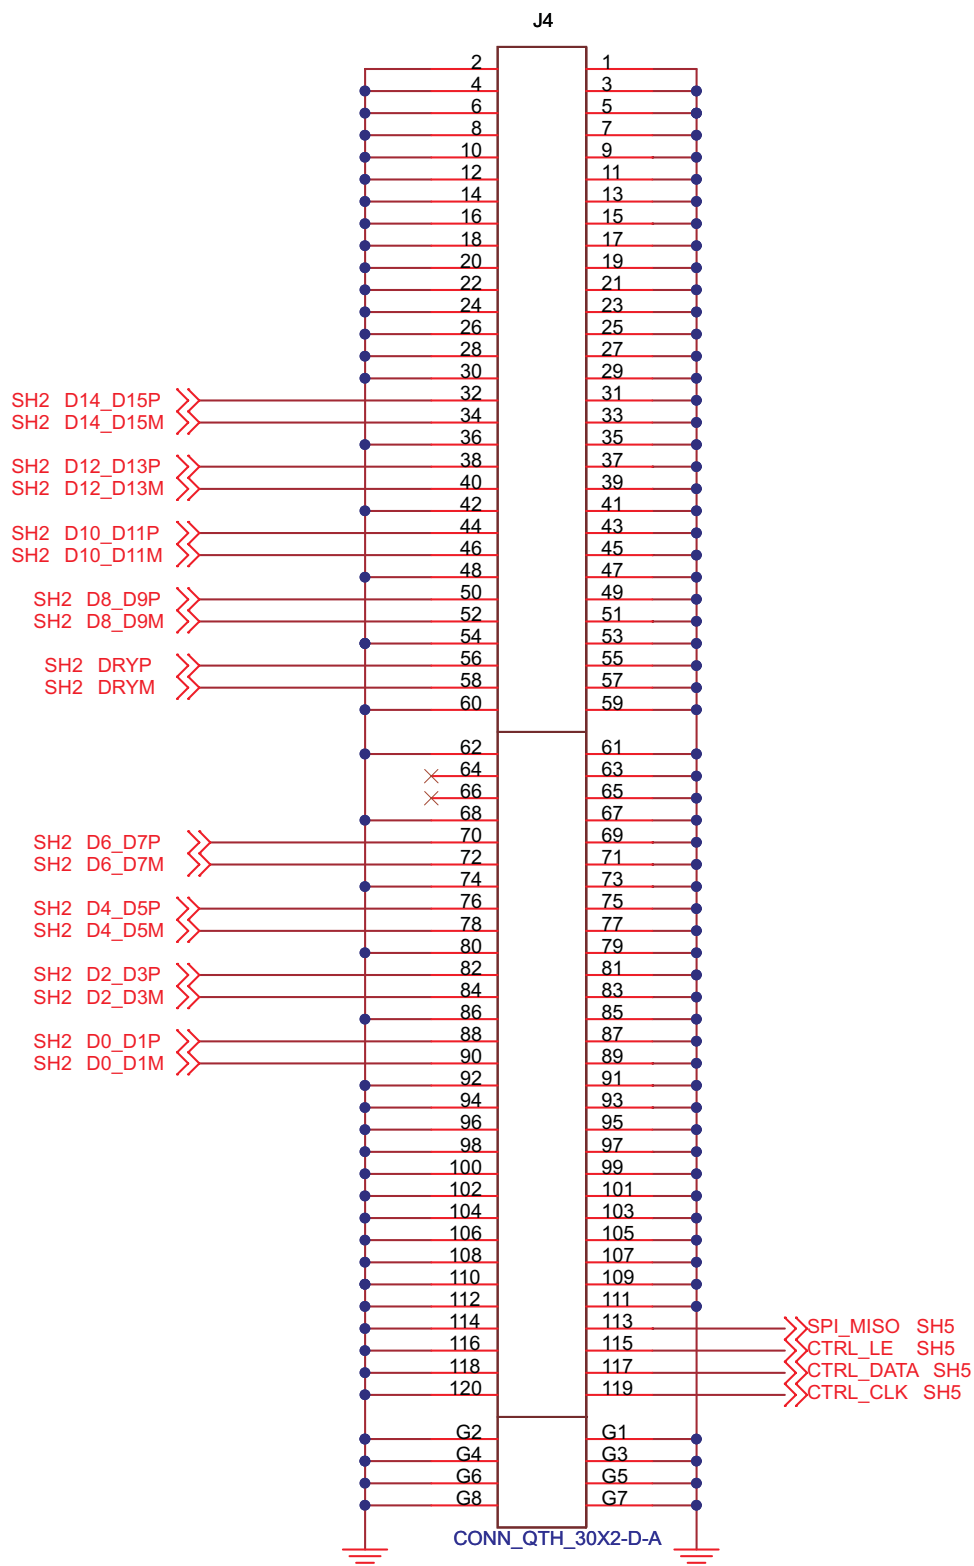


Figure 11. EVM Schematics, Sheet 3

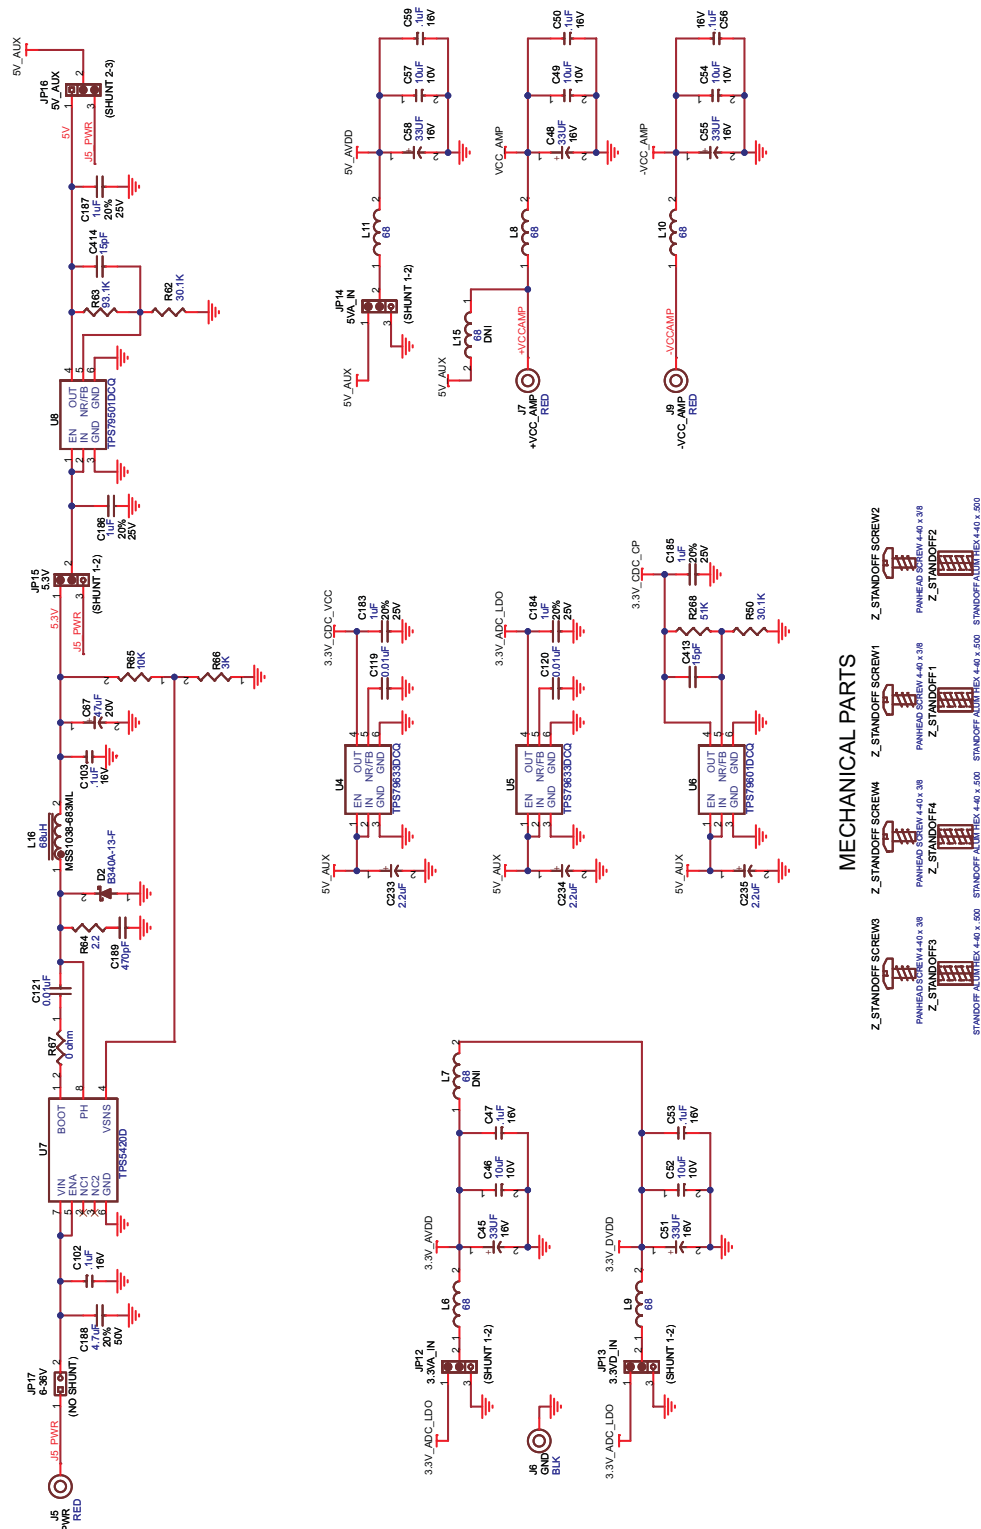


Figure 12. EVM Schematics, Sheet 4

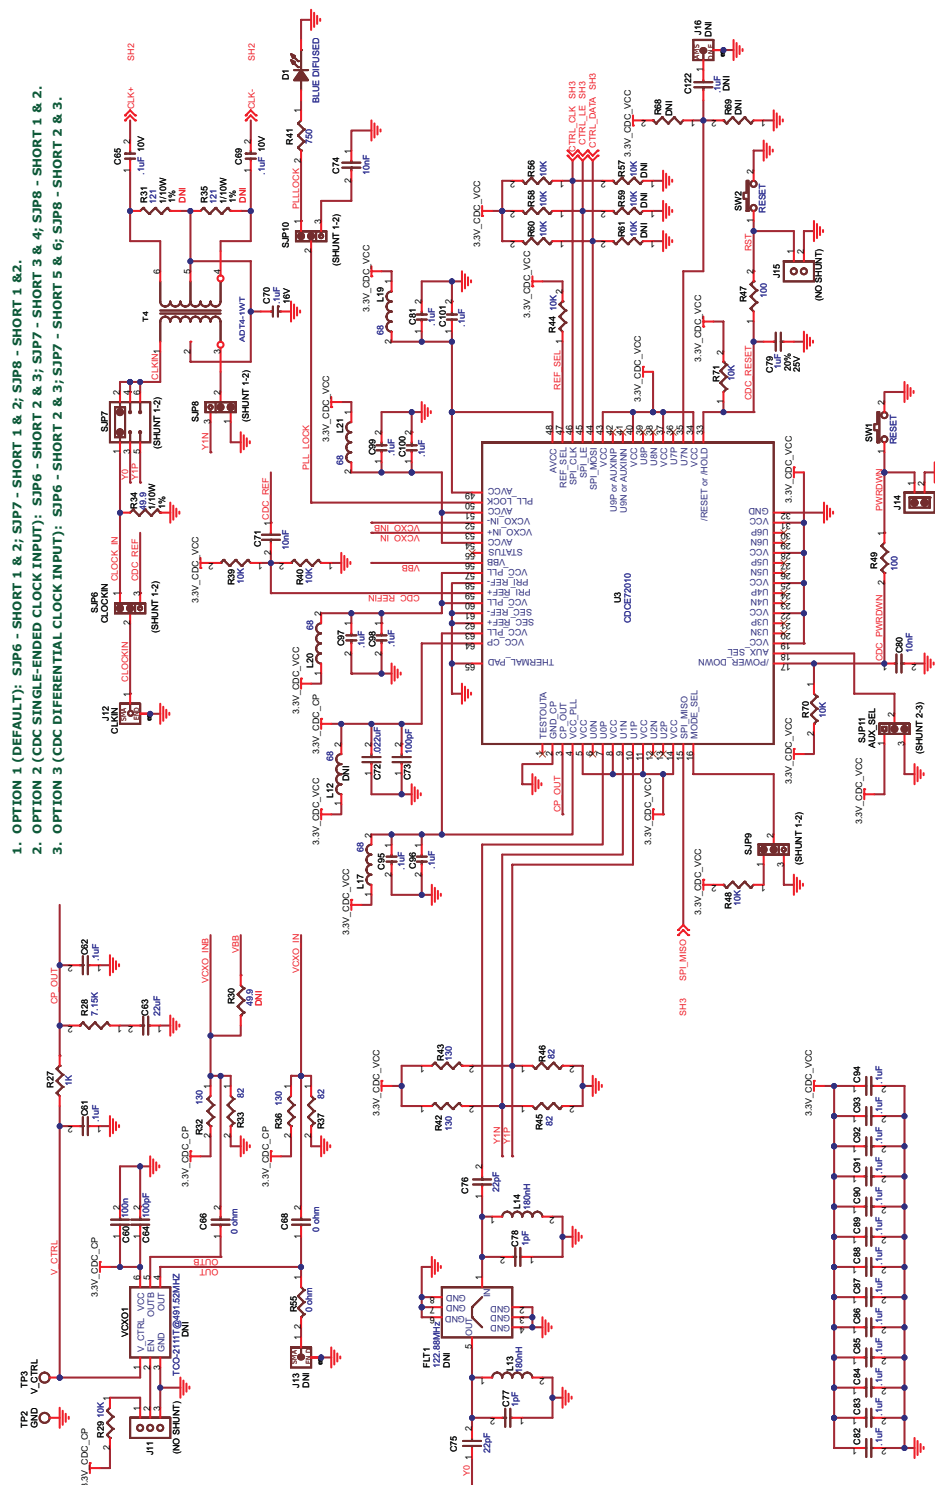


Figure 13. EVM Schematics, Sheet 5

4.2 PCB Layout

The EVM is constructed on a six-layer, 0.062-inch-thick printed-circuit board (PCB) using FR-4 material. The individual layers are shown in [Figure 14](#) through [Figure 19](#). The layout features a common ground plane; however, similar performance can be obtained with careful layout using a split ground plane.

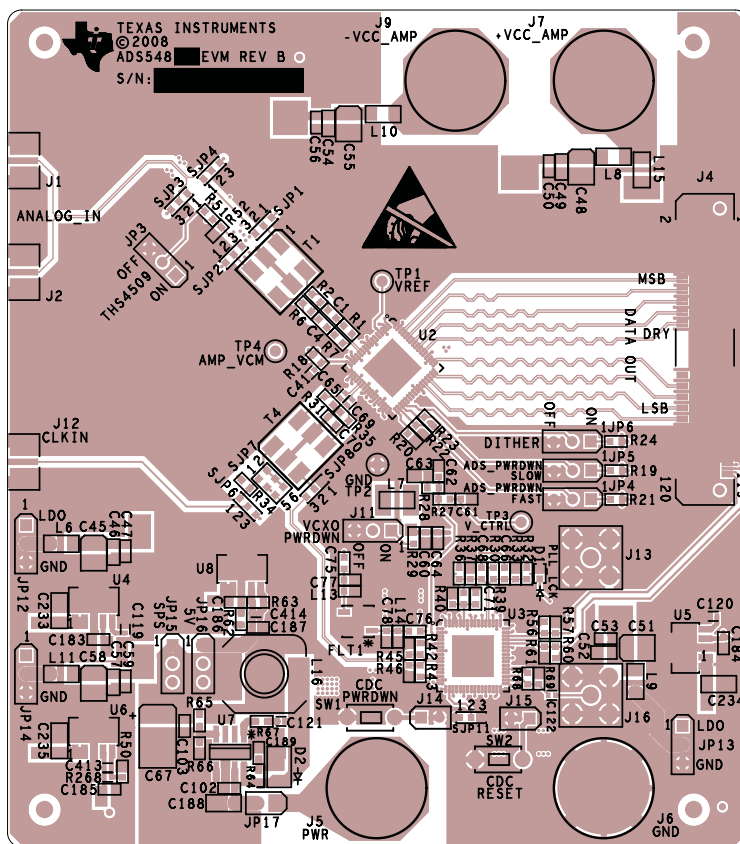


Figure 14. Component Side

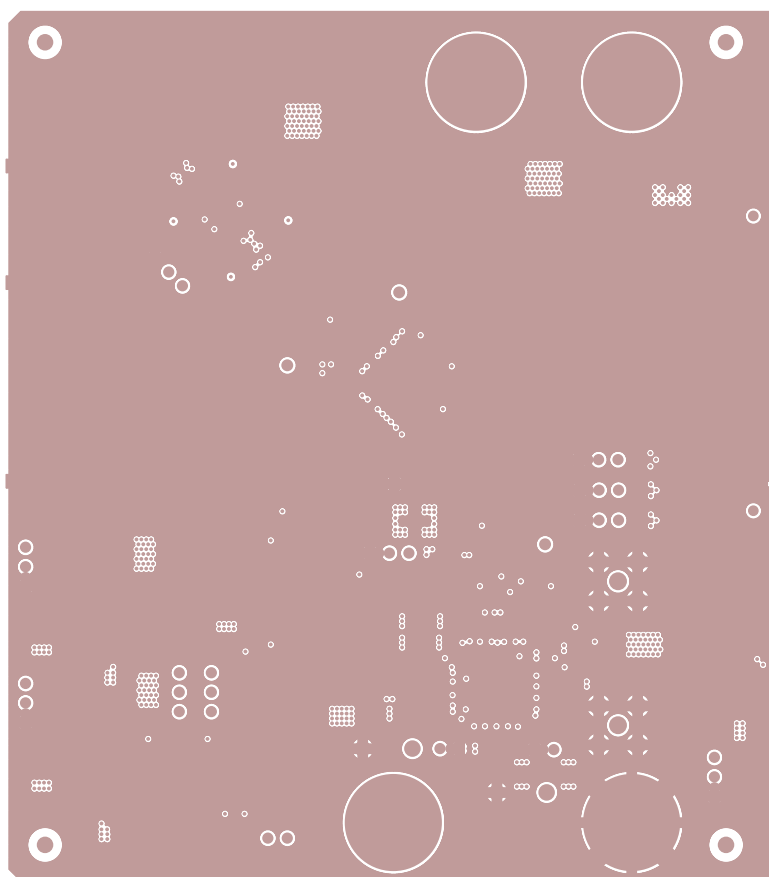


Figure 15. Ground Plane 1

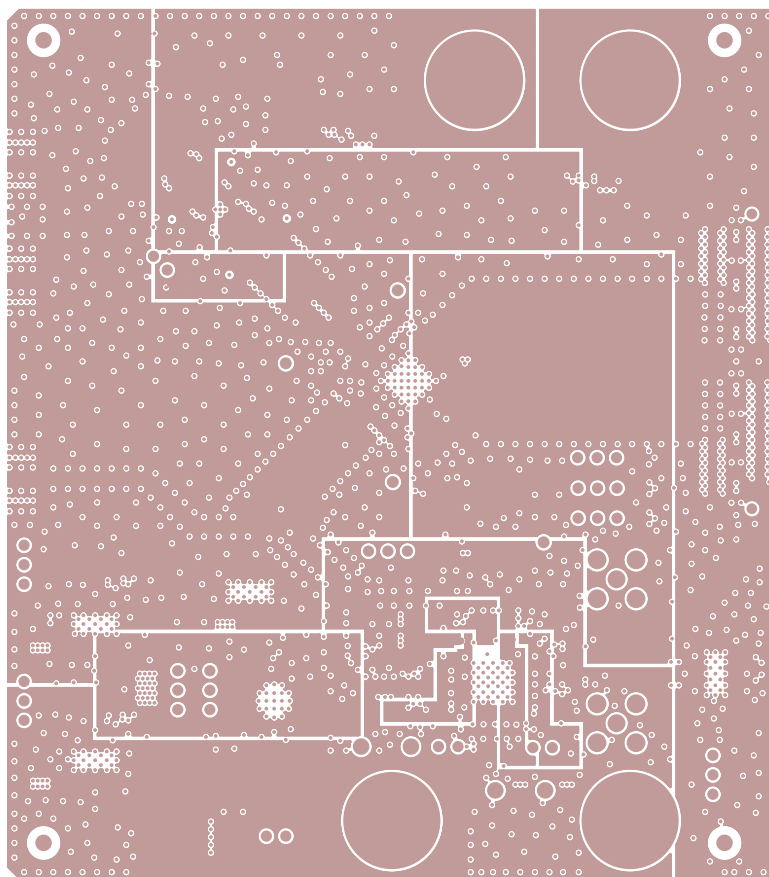


Figure 16. Power Plane 1

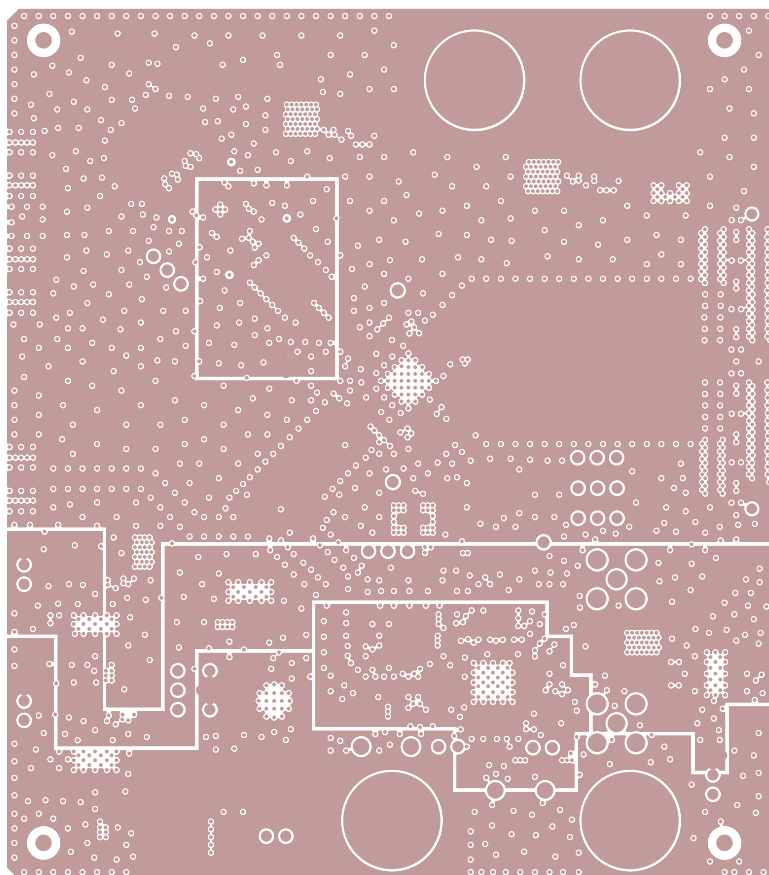


Figure 17. Power Plane 2

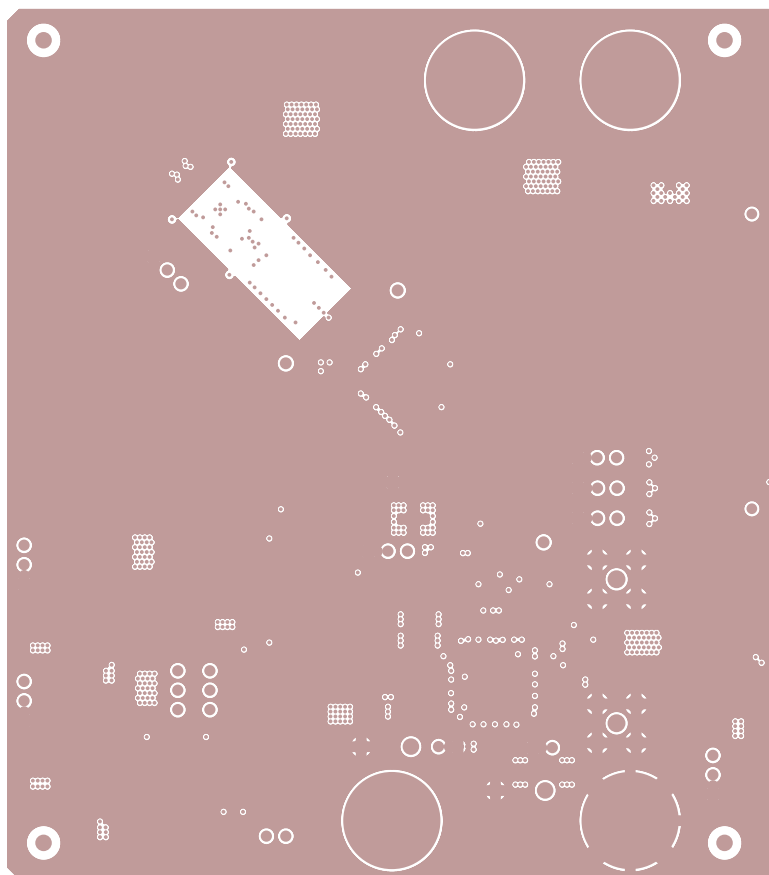


Figure 18. Ground Plane 2

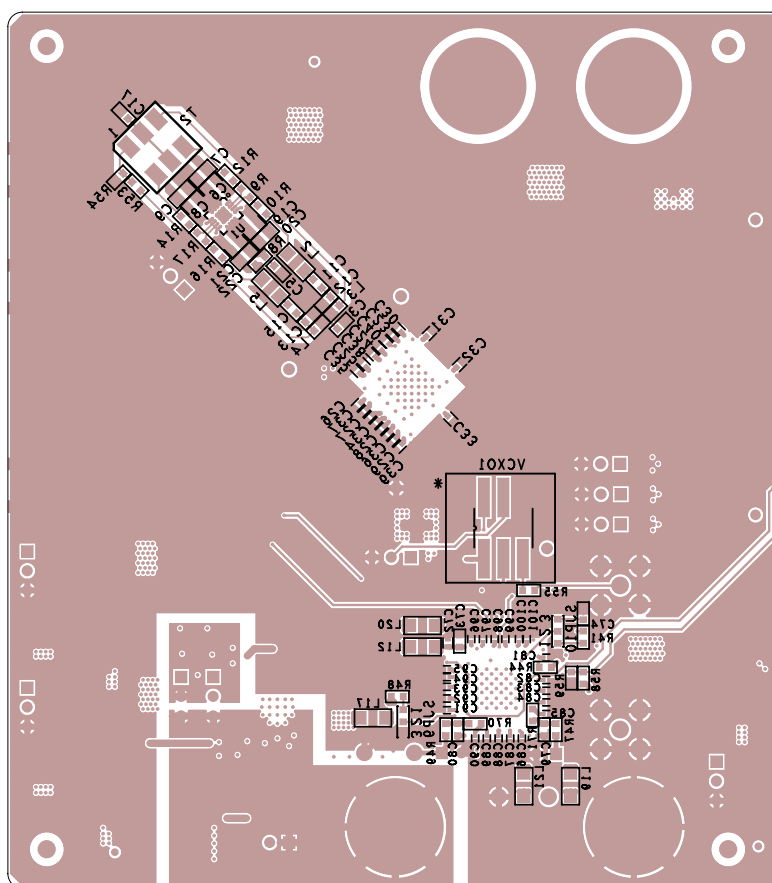


Figure 19. Bottom Side

4.3 Bill of Materials

Qty	Reference	Value	Footprint	MFR.	Part Number	Tol	Volt	Wat	Note
2	C1,C4	1 μ F	603	Panasonic	ECJ-1VB1A105K	10%	10V		
6	C3,C5,C6,C17,C19,C21	0.1 μ F	603	Panasonic	ECJ-1VB1C104K	10%	16V		
9	C7,C9,C20,C22,C46,C49,C52,C54,C57	10 μ F	805	Panasonic	ECJ-2FB1A106K	10%	10V		
1	C8	0.1 μ F	603	Panasonic	ECJ-1VB1C104K	10%	16V	1/10W	
0	C11–C13,C15	100 pF	603	Murata	GQM1885C1H101JB01D_DNI				DNI
15	C23–C37	0.01 μ F	402	Panasonic	ECJ-0EB1E103K	$\pm$ 10%	25V		
2	C38, C39	0.01 μ F	402	Panasonic	ECJ-0EB1E103K	10%	25V		
4	C40, C41, C65, C69	0.1 μ F	402	Panasonic	ECJ-0EB1A104K	10%	10V		
5	C45, C48, C51, C55, C58	33 μ F	TANT_B	AVX	TPSB336K016R0350	10%	16V		
8	C47, C50, C53, C56, C59, C70, C102, C103	0.1 μ F	603	Panasonic	ECJ-1VB1C104K	10%	16V		
1	C60	100 n	603	Panasonic	ECJ-1VB1C104K	10%	16V		
2	C61, C62	0.1 μ F	603	Panasonic	ECJ-1VB1C104K	10%	16V		
1	C63	22 μ F	805	Panasonic	ECJ-2FB0J226M	20%	6.3V		
2	C64, C73	100 pF	603	Panasonic	ECJ-1VC1H101J	5%	50V		
2	C66, C68	0 Ω	603	DALE	CRCW06030000Z0EA	5%		1/10W	
1	C67	47 μ F	TANT_E	AVX	TPSE476M020R0150	10%	20V		
3	C71, C74, C80	10 nF	603	AVX	06035C103KAZ2A	10%	50V		
1	C72	0.022 μ F	402	AVX Corporation	0402YC223KAT2A				
2	C75, C76	22 pF	603	AVX	06033J220GBTTR	2%	25V		
2	C77, C78	1 pF	603	Murata	GQM1885C2A1R0CB01D	0.25pF	100V		
6	C79,C183–C187	1 μ F	603	Panasonic	ECJ-1V41E105M	20%	25V		
21	C81–C101	0.1 μ F	201	Panasonic	ECJ-ZEBFJ104K	5%	50V		
3	C119–C121	0.01 μ F	402	Panasonic	ECJ-0EB1E103K	10%			
0	C122	0.1 μ F	402	Panasonic	ECJ-0EB1C104K_DNI	10%	16V		DNI
1	C188	4.7 μ F	1206	Murata	GRM31CF51H475ZA01L	20%	50V		
1	C189	470 pF	603	Murata	GRM188R71H471MA01D	20%	50V		
3	C233–C235	2.2 μ F	1206	Panasonic	ECJ-HVB1A225K				
2	C413,C414	15 pF	402	Panasonic	ECJ-0EC1H150J	5%	50V		
1	D1	Blue diffused	DIODE_SM_HSMN_C170	AVAGO	HSMN-C170				
1	D2	B340A-13-F	DIODE_SM_DO_214AC	Diodes Inc	B340A-13-F				
0	FLT1	122.88 MHz	FILTER_8_SM_150x150	Toyocom	TF2-C2EC1_DNI				DNI
5	JP3–JP6, JP16	HEADER_1x3_100_430L	HDR_THVT_1x3_100_M	SAMTEC	HMTSW-103-07-G-S-.240				(Shunt 2-3)
4	JP12–JP15	HEADER_1x3_100_430L	HDR_THVT_1x3_100_M	SAMTEC	HMTSW-103-07-G-S-.240				(Shunt 1-2)
1	JP17	HEADER_1x2_100_430L	HDR_THVT_1x2_100_M	SAMTEC	HMTSW-102-07-G-S-.240				(No shunt)
2	J1, J12	SMA_END_JACK_RND	SMA_SMEL_250x215	Johnson Components	142-0711-821				
0	J2	SMA_END_JACK_RND	SMA_SMEL_250x215	Johnson Components	142-0711-821_DNI				DNI
1	J4	CONN_QTH_30X2-D-A	conn_QTH_30X2-D-A	Samtec	QTH-060-02-F-D-A				
3	J5, J7, J9	Red	JACK_THVT_BANANA_500DIA	SPC Technology	845-R				
1	J6	Black	JACK_THVT_BANANA_500DIA	SPC Technology	845-B				
1	J11	HMTSW-103-07-G-S-.240	HDR_THVT_1x3_100_M	SAMTEC	HMTSW-103-07-G-S-.240				(No shunt)
0	J13, J16	TI_SILKTEXT	SMA_THVT_320x320	Johnson Components	142-0701-201_DNI				DNI
1	J14	HMTSW-102-07-G-S-.240	HDR_THVT_1x2_100_M	SAMTEC	HMTSW-102-07-G-S-.240				(Shunt)
1	J15	HMTSW-102-07-G-S-.240	HDR_THVT_1x2_100_M	SAMTEC	HMTSW-102-07-G-S-.240				(No shunt)
0	L2, L5	220nH	1206	Coilcraft	1206CS-221X-LB_DNI				DNI
0	L3, L4	220 nH	603	Coilcraft	0603CS-R22X-LU_DNI	2%			DNI
9	L6,L8–L11, L17, L19–L21	68	1206	Panasonic	EXC-ML32A680U				
0	L7, L12, L15	68	1206	Panasonic	EXC-ML32A680U_DNI				DNI

Physical Description

www.ti.com

Qty	Reference	Value	Footprint	MFR.	Part Number	Tol	Volt	Wat	Note
2	L13, L14	180 nH	603	Panasonic	ELJ-RER18JF3	5%			
1	L16	68 μ H	IND_SM_MSS1038	Coilcraft	MSS1038-683ML				
2	R1, R7	24	603	Panasonic	ERJ-3GEYJ240V	1%		1/16W	
2	R2, R6	39	603	Panasonic	RC0603FR-0739RL	1%		1/10W	
4	R8, R19, R21, R24	10K	603	Panasonic	ERJ-3EKF1002V	1%		1/10W	
2	R9, R17	348	603	Panasonic	ERJ-3EKF3480V	1%		1/10W	
0	R10, R16	68	603	Panasonic	ERA-3AEB680V_DNI	1%		1/10W	DNI
2	R12, R14	100	603	Panasonic	ERJ-3EKF1000V	1%		1/10W	
0	R18	0 Ω	603	Panasonic	ERJ-3GEY0R00V_DNI	5%		1/10W	DNI
1	R20	11K	603	Panasonic	ERJ-3EKF1102V	1%		1/10W	
0	R22, R23, R30	49.9	603	Panasonic	ERJ-3EKF49R9V_DNI	1%		1/10W	DNI
1	R27	1K	603	Panasonic	ERJ-3EKF1001V				
1	R28	7.15K	603	Yageo	RT0603DRD077K15L	0.50%		1/10W	
11	R29, R39, R40, R44, R48, R56, R58, R60, R65, R70, R71	10K	603	DALE	CRCW060310K0FKEA	1%		1/10W	
0	R31, R35	121	603	Panasonic	ERJ-3EKF1210V_DNI	1%		1/10W	DNI
4	R32, R36, R42, R43	130	603	DALE	CRCW0603130RFKEA	1%		1/10W	
4	R33, R37, R45, R46	82	603	DALE	CRCW060382R0FKEA	1%		1/10W	
1	R34	49.9	603	Panasonic	ERJ-3EKF49R9V	1%		1/10W	
1	R41	750	603	DALE	CRCW0603750RFKEA				
2	R47, R49	100	603	DALE	CRCW0603100RFKEA	1%		1/10W	
2	R50, R62	30.1K	603	Panasonic	ERJ-3EKF3012V	1%	1/10 W		
0	R51, R53	0 Ω	603	DALE	CRCW06030000Z0EA_DNI	5%		1/10W	DNI
4	R52, R54, R55, R67	0 Ω	603	DALE	CRCW06030000Z0EA	5%		1/10W	
0	R57, R59, R61	10K	603	DALE	CRCW060310K0FKEA_DNI	1%		1/10W	DNI
1	R63	93.1K	603	Panasonic	ERJ-3EKF9312V	1%	1/10 W		
1	R64	2.2	603	Panasonic	ERJ-3RQF2R2V	1%	1/10 W		
1	R66	3K	603	Yageo	RC0603FR-073KL	1%		1/10W	
0	R68, R69	10K	603	DALE	CRCW060310K0FKEA_DNI	1%		1/10W	DNI
1	R268	51K	402	Panasonic	ERJ-S02F5102X	1%			
3	SJP1, SJP2, SJP11	JUMPER_1x3_SMT	SMD_BRIDGE_1x3_0603	DNI	DNI				(Shunt 2-3)
1	SJP3	JUMPER_1x3_SMT	SMD_BRIDGE_1x3_0603	DNI	DNI				(No shunt)
5	SJP4, SJP6, SJP8-JP10	JUMPER_1x3_SMT	SMD_BRIDGE_1x3_0603	DNI	DNI				(Shunt 1-2)
1	SJP7	JUMPER_3x2_SMT	SMD_BRIDGE_2x3_0603	DNI	DNI				(Shunt 1-2)
2	SW1, SW2	RESET	SW_THVT_SPST_PTS635SL43	ITT Industries/ C&K Div	PTS635SL43				
3	TP1-TP3	TP_THVT_060_RND-WHT	TP_THVT_060_RND	Components Corporation	TP-105-01-09				
1	TP4	Test Point Black	TP_THVT_060_RND	Keystone	5001				
2	T1, T2	ADT1-1WT	TRANS_SMVT_CD542_6	Mini Circuits	ADT1-1WT				
1	T4	ADT4-1WT	TRANS_SMVT_CD542_6	Mini Circuits	ADT4-1WT				
1	U1	THS4509	QFN_16_124x124_pwrpad	Texas Instruments	THS4509RGTT				Ti Supplied
1	U2	ADS548X	QFN64	Texas Instruments	ADS548X				Ti Supplied
1	U3	CDCE72010	QFN64	Texas Instruments	CDCE72010				Ti Supplied
2	U4, U5	TPS79633DCQ	SOT_223_6_TG	Texas Instruments	TPS79633DCQ				Ti Supplied
1	U6	TPS79601DCQ	SOT_223_6_TG	Texas Instruments	TPS79601DCQ				Ti Supplied
1	U7	TPS5420D	SOIC_8_197x157_50	Texas Instruments	TPS5420D				Ti Supplied
1	U8	TPS79501DCQ	SOT_223_6_TG	Texas Instruments	TPS79501DCQ				Ti Supplied
0	VCXO1	TCO-2111T at 491.52MHz	VCXO_6_Custom2	TOYOCOM	TCO-2111T at 491.52MHz_DNI				DNI
10	Z_SH-H1-Z_SH-H10	Shunt-header		Keltron	MJ-5.97-G or equivalent				Shunt for header

Qty	Reference	Value	Footprint	MFR.	Part Number	Tol	Volt	Wat	Note
9	Z_SH-J1, Z_SH-J2, Z_SH-J4,– Z_SH-J10	Shunt-jumper-0603		Panasonic	ERJ-3GE0R00X				Shunt for jumper
4	Z_STANDOFF SCREW1– Z_STANDOFF SCREW4	Panhead Screw 4-40 x 3/8		Building Fasteners	PMS 440 0038 PH				Screw for standoff
4	Z_STANDOFF1– Z_STANDOFF4	Standoff Alum Hex 4-40 x .500		Keystone	2203				Standoff

EVALUATION BOARD/KIT IMPORTANT NOTICE

Texas Instruments (TI) provides the enclosed product(s) under the following conditions:

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. Persons handling the product(s) must have electronics training and observe good engineering practice standards. As such, the goods being provided are not intended to be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including product safety and environmental measures typically found in end products that incorporate such semiconductor components or circuit boards. This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and therefore may not meet the technical requirements of these directives or other related directives.

Should this evaluation board/kit not meet the specifications indicated in the User's Guide, the board/kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user indemnifies TI from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge.

EXCEPT TO THE EXTENT OF THE INDEMNITY SET FORTH ABOVE, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

TI currently deals with a variety of customers for products, and therefore our arrangement with the user **is not exclusive**.

TI assumes **no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein.**

Please read the User's Guide and, specifically, the Warnings and Restrictions notice in the User's Guide prior to handling the product. This notice contains important safety information about temperatures and voltages. For additional information on TI's environmental and/or safety programs, please contact the TI application engineer or visit www.ti.com/esh.

No license is granted under any patent right or other intellectual property right of TI covering or relating to any machine, process, or combination in which such TI products or services might be or are used.

FCC Warning

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. It generates, uses, and can radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment in other environments may cause interference with radio communications, in which case the user at his own expense will be required to take whatever measures may be required to correct this interference.

EVM WARNINGS AND RESTRICTIONS

It is important to operate this EVM within the input voltage range of -0.3 V to 5.3 V and the output voltage range of -0.3 V to 3.3 V.

Exceeding the specified input range may cause unexpected operation and/or irreversible damage to the EVM. If there are questions concerning the input range, please contact a TI field representative prior to connecting the input power.

Applying loads outside of the specified output range may result in unintended operation and/or possible permanent damage to the EVM. Please consult the EVM User's Guide prior to connecting any load to the EVM output. If there is uncertainty as to the load specification, please contact a TI field representative.

During normal operation, some circuit components may have case temperatures greater than 50°C. The EVM is designed to operate properly with certain components above 25°C as long as the input and output ranges are maintained. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors. These types of devices can be identified using the EVM schematic located in the EVM User's Guide. When placing measurement probes near these devices during operation, please be aware that these devices may be very warm to the touch.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2008, Texas Instruments Incorporated

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2008, Texas Instruments Incorporated