

W005G - W10G

PRV : 50 - 1000 Volts
Io : 1.5 Ampere


FEATURES :

- * Glass passivated chip
- * High case dielectric strength
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Ideal for printed circuit board
- * **Pb / RoHS Free**

MECHANICAL DATA :

- * Case : Reliable low cost construction utilizing molded plastic technique
- * Epoxy : UL94V-O rate flame retardant
- * Terminals : Plated leads solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Polarity symbols marked on case
- * Mounting position : Any
- * Weight : 1.29 grams

GLASS PASSIVATED SINGLE-PHASE SILICON BRIDGE RECTIFIERS

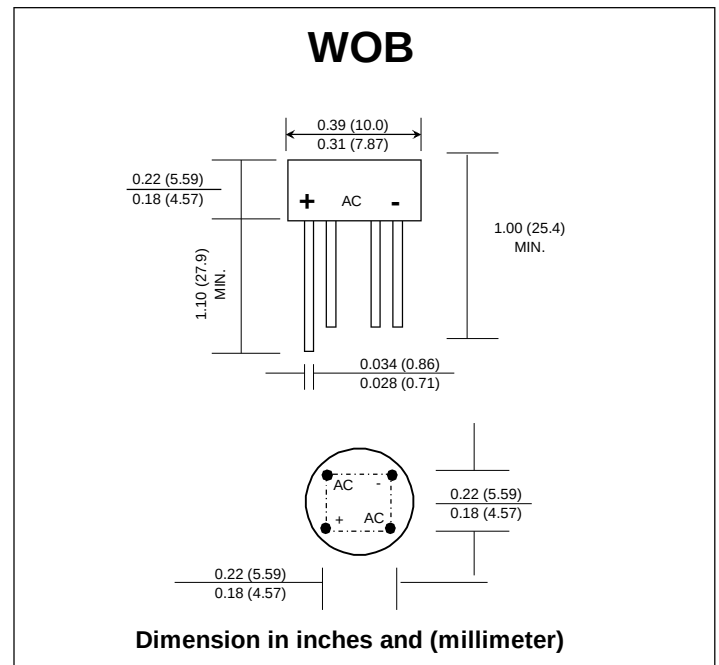

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

RATING	SYMBOL	W005G	W01G	W02G	W04G	W06G	W08G	W10G	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Current 0.375" (9.5 mm) lead length	$I_{F(AV)}$	1.5							A
Peak Forward Surge Current Single half sine wave Superimposed on rated load (JEDEC Method)	I_{FSM}	50							A
Rating for fusing (t < 8.3 ms.)	I^2t	10							A ² S
Maximum Forward Voltage per Diode at $I_F = 1.0$ A	V_F	1.0							V
Maximum DC Reverse Current $T_a = 25$ °C	I_R	5							μA
at Rated DC Blocking Voltage $T_a = 125$ °C	$I_{R(H)}$	0.5							mA
Typical Junction Capacitance per Diode (Note 1)	C_J	14							pf
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	36							°C/W
Operating Junction Temperature Range	T_J	- 50 to + 150							°C
Storage Temperature Range	T_{STG}	- 50 to + 150							°C

Notes :

- 1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.
- 2) Thermal resistance from Junction to Ambient at 0.375" (9.5 mm) lead length P.C. Board mounting.

RATING AND CHARACTERISTIC CURVES (W005G - W10G)

FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

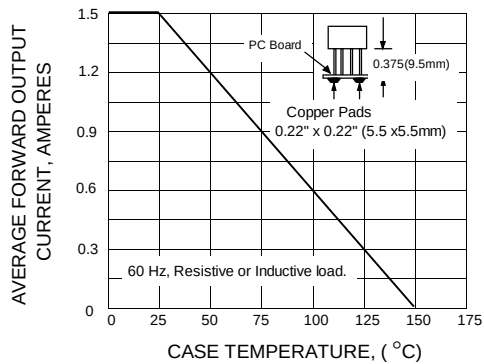


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

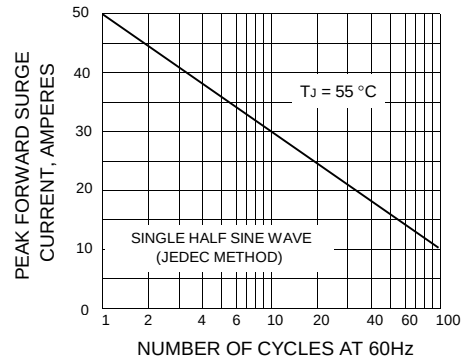


FIG.3 - TYPICAL FORWARD CHARACTERISTICS

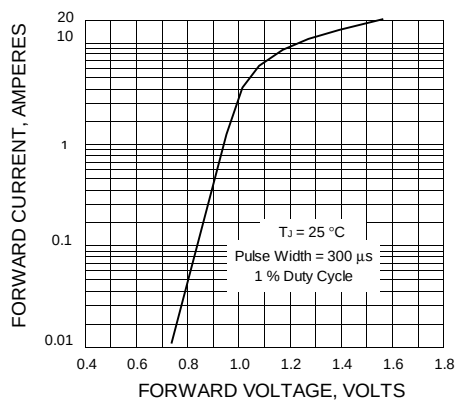


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

