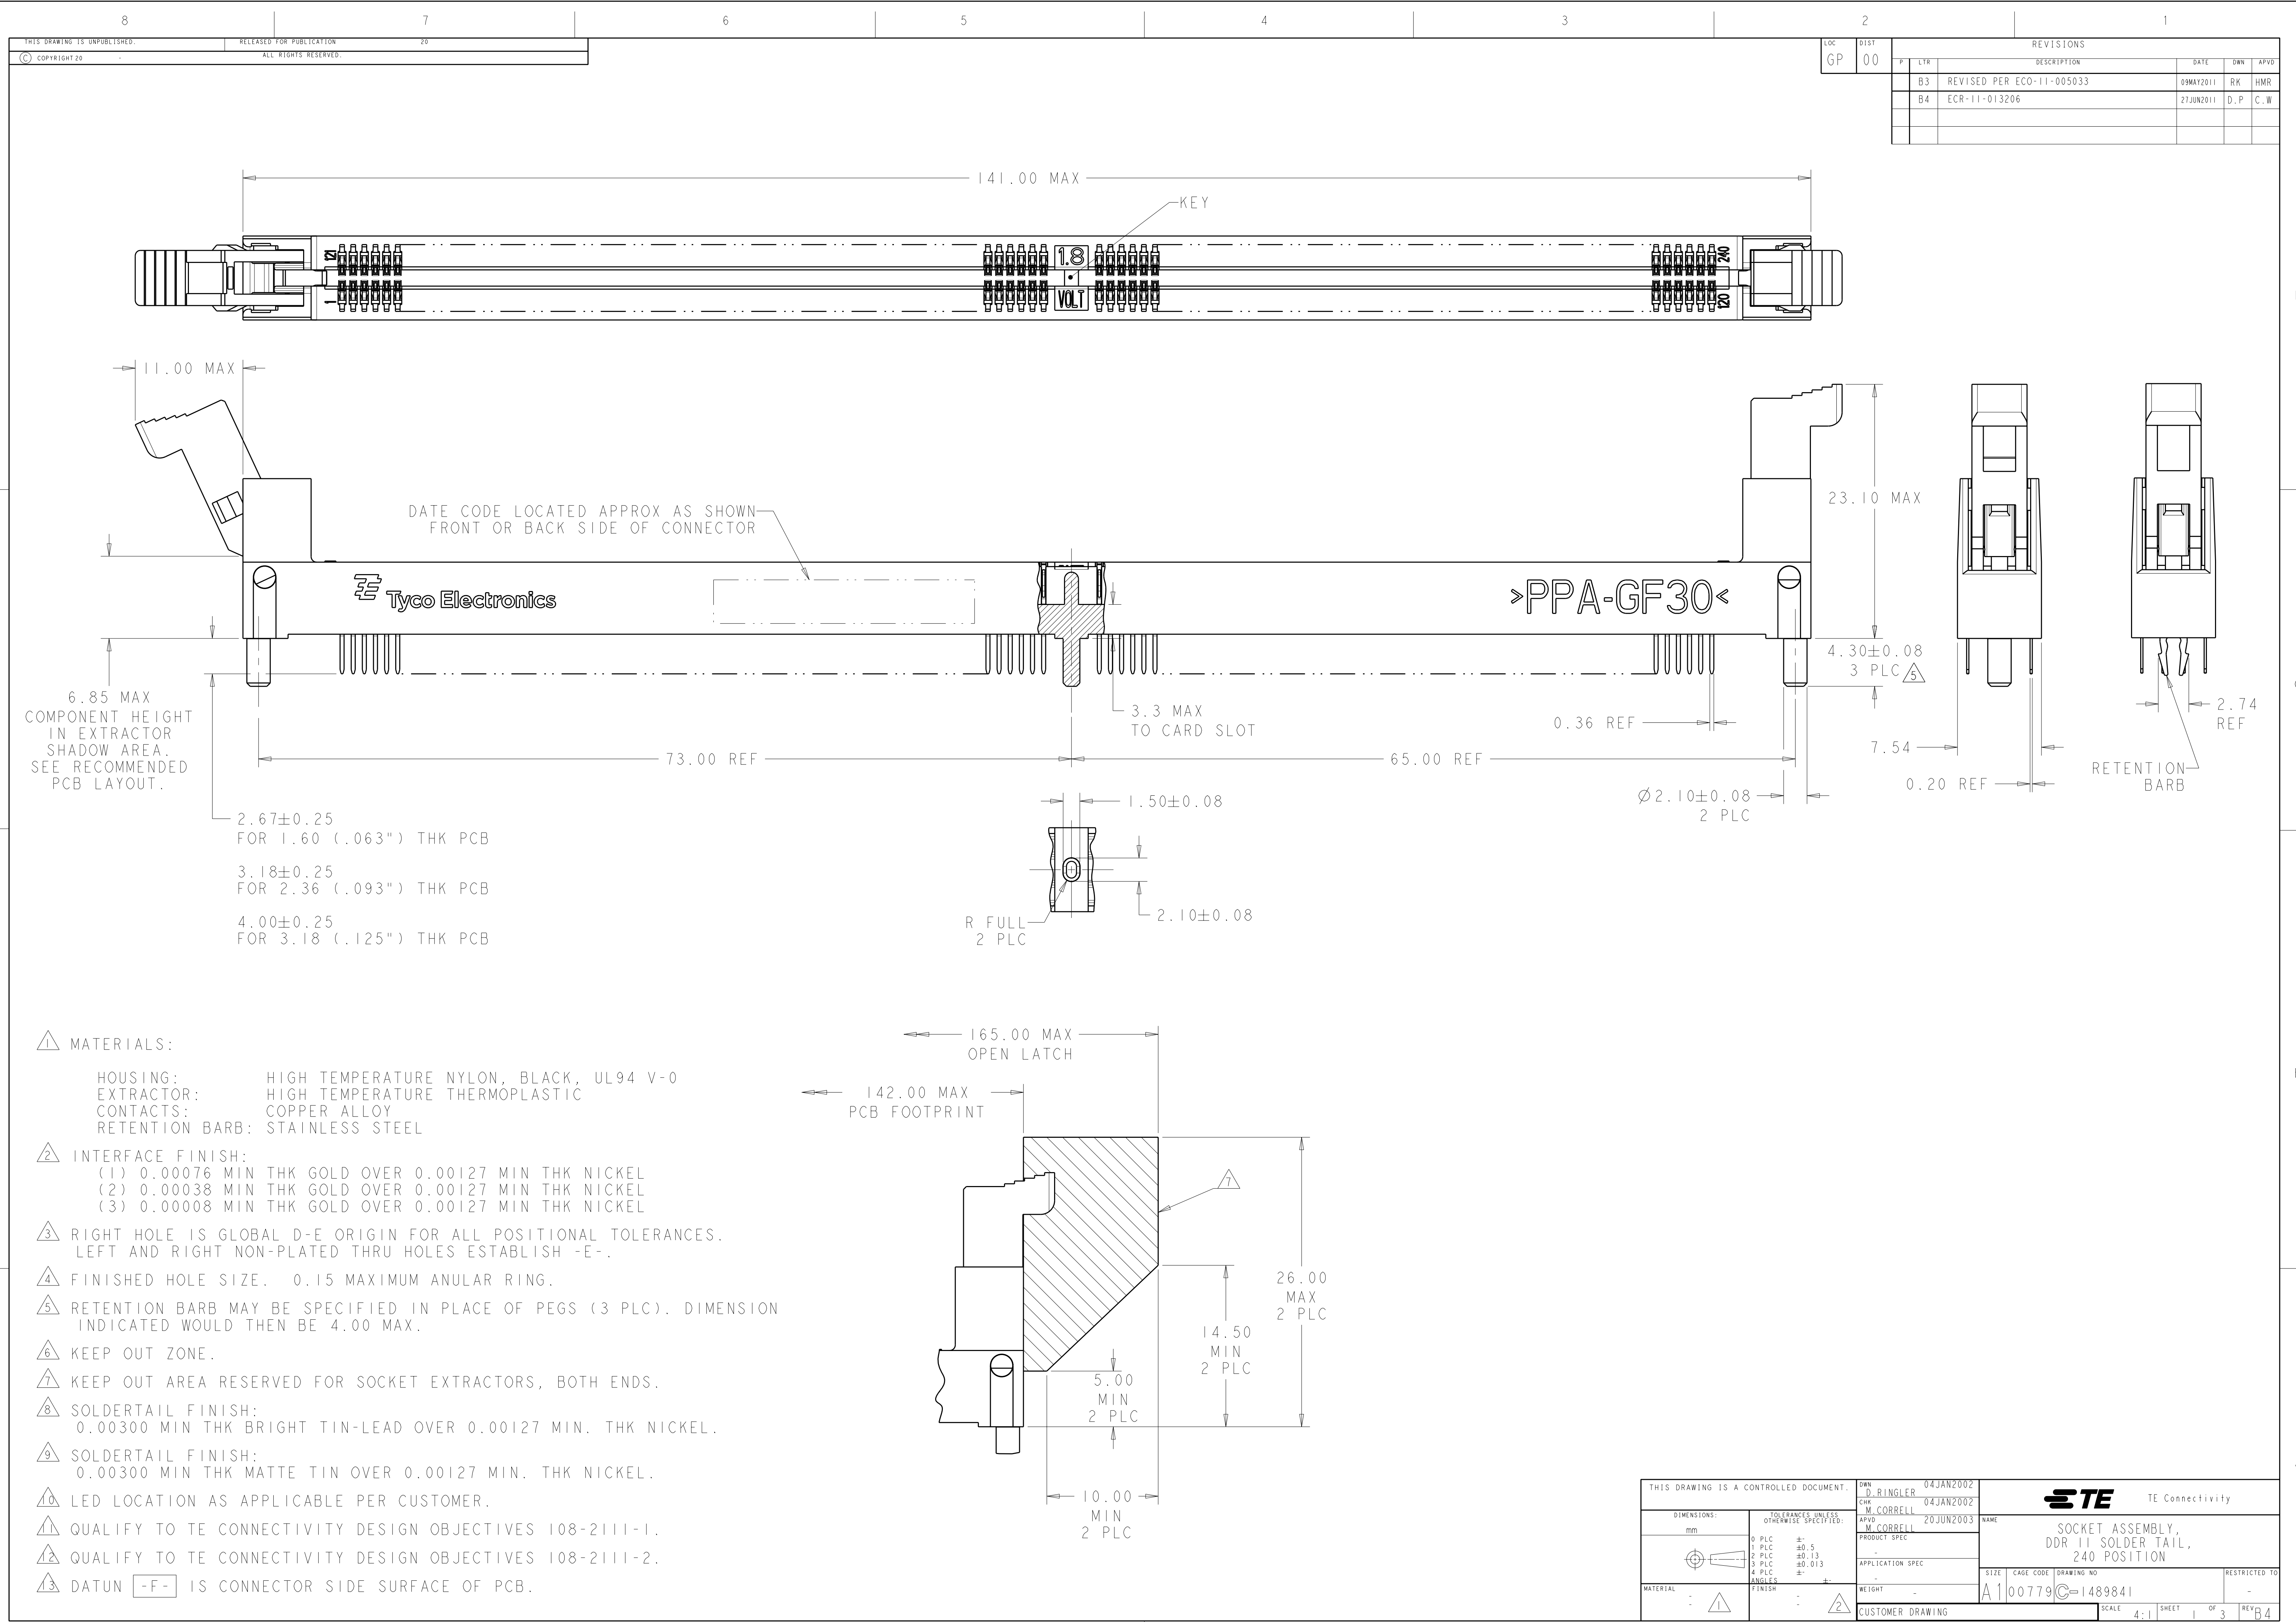




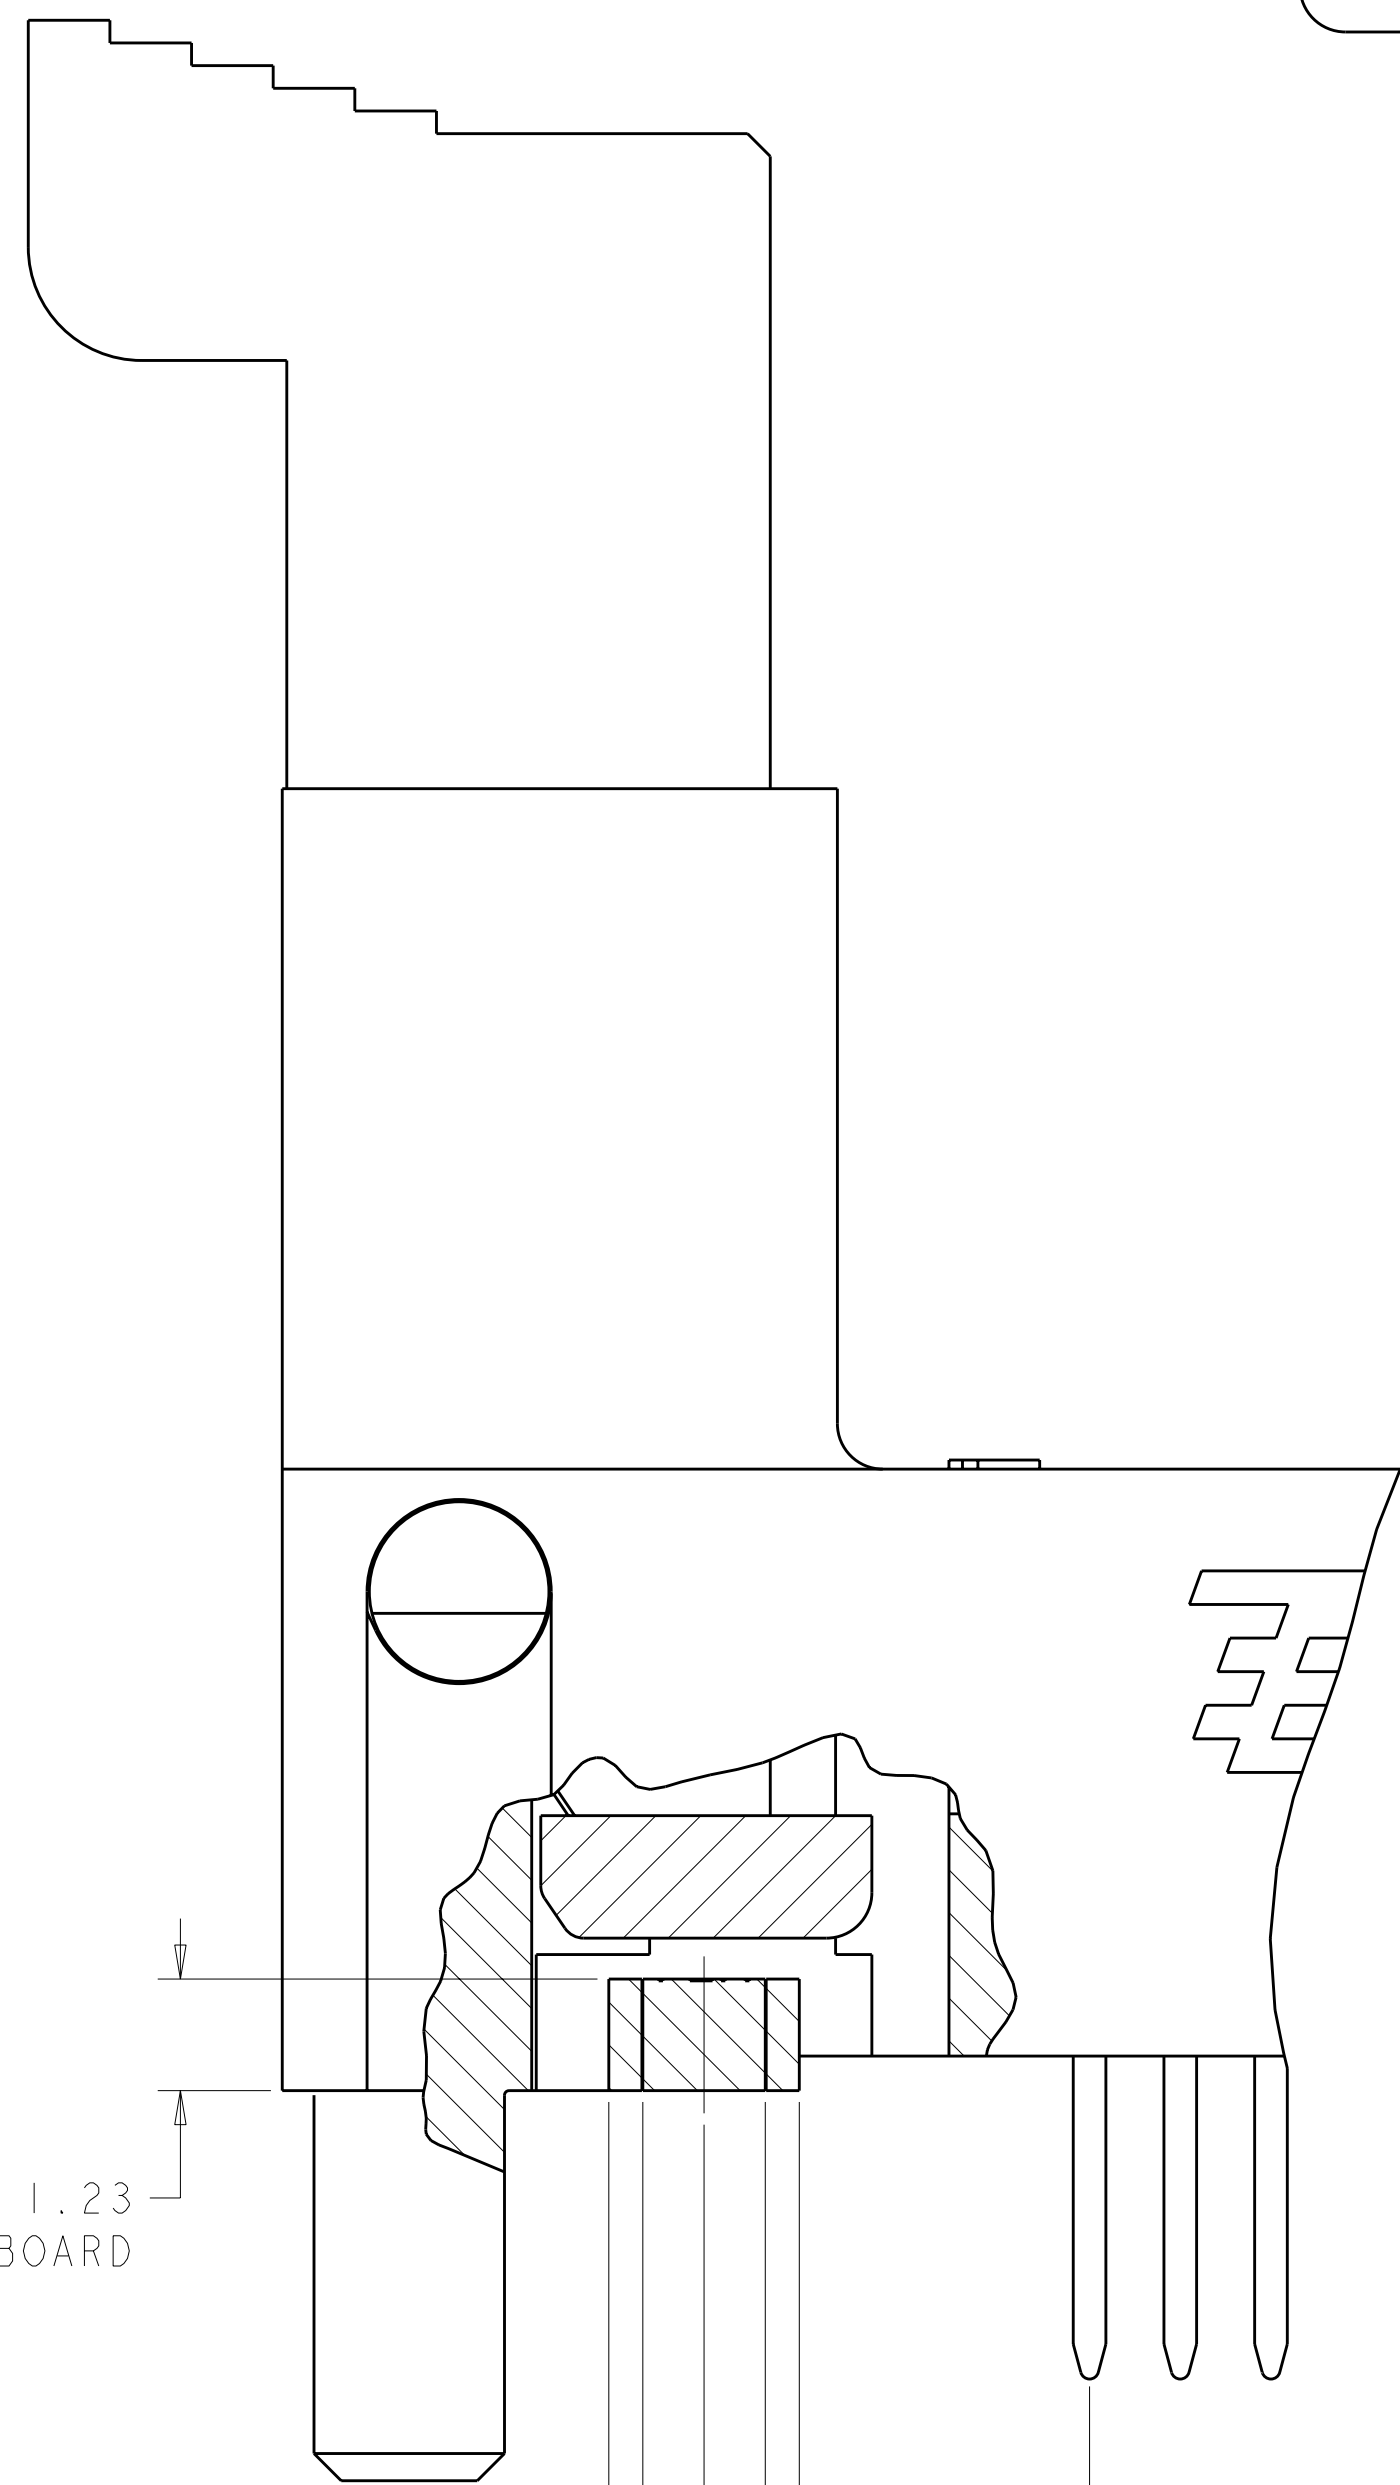


Diagram illustrating LED placement dimensions:

- LED PLACED IN "X" DIRECTION: 2.10
- LED PLACED IN "Y" DIRECTION: 1.35
- LED CENTER IN "X" OR "Y" DIRECTIONS: 4.25

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 04JAN2002 REV 1 RINGLER		 TE Connectivity	
		CHK 04JAN2002 M. CORRELL			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm		FRACTIONAL DECIMAL		SOCKET ASSEMBLY, DDR II SOLDER TAIL, 240 POSITION	
		0 PLC ±0		PRODUCT SPEC - APPLICATION SPEC -	
		2 PLC ±0.5			
		2 PLC ±0.13			
		2 PLC ±0.013			
ANGLES		° ±		SIZE CAGE CODE DRAWING NO	
FINISH		WEIGHT		A100779C-1489841	
MATERIAL		CUSTOMER DRAWING		RESTRICTED TO	
-		-		-	
				SCALE 4:1 SHEET 2 of 3 REV B	

4805 (3/11)

