

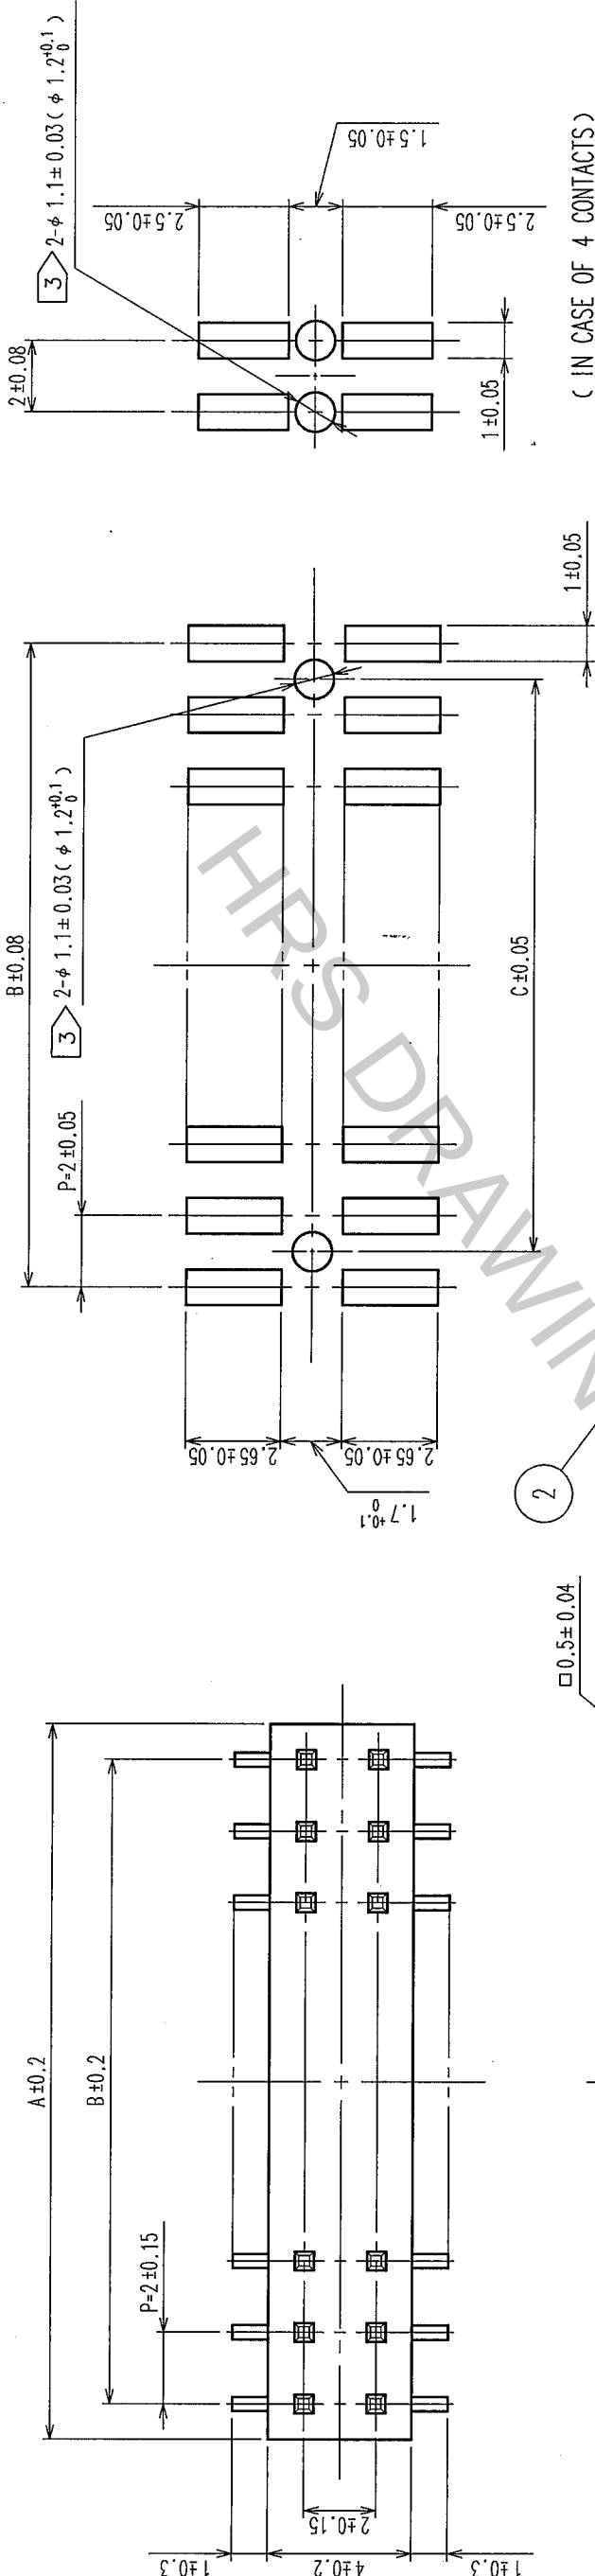


RECOMMENDED PC BOARD LAYOUT

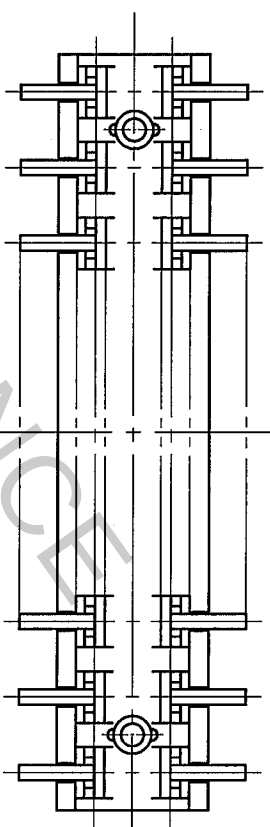

PART No.	CODE No.	A	B	C
A3A-4PA-2SV(71)	CL621-1040-0-71	4	2	2
A3A-6PA-2SV(71)	CL621-1041-3-71	6	4	2
A3A-8PA-2SV(71)	CL621-1042-6-71	8	6	4
A3A-10PA-2SV(71)	CL621-1043-9-71	10	8	6
A3A-12PA-2SV(71)	CL621-1044-1-71	12	10	8
A3A-14PA-2SV(71)	CL621-1045-4-71	14	12	10
A3A-16PA-2SV(71)	CL621-1046-7-71	16	14	12
A3A-20PA-2SV(71)	CL621-1048-2-71	20	18	16
A3A-24PA-2SV(71)	CL621-1050-4-71	24	22	20
A3A-28PA-2SV(71)	CL621-1052-0-71	28	26	24
A3A-32PA-2SV(71)	CL621-1054-5-71	32	30	28
A3A-44PA-2SV(71)	CL621-1055-8-71	44	44	40
A3A-50PA-2SV(71)	CL621-1056-0-71	50	50	46

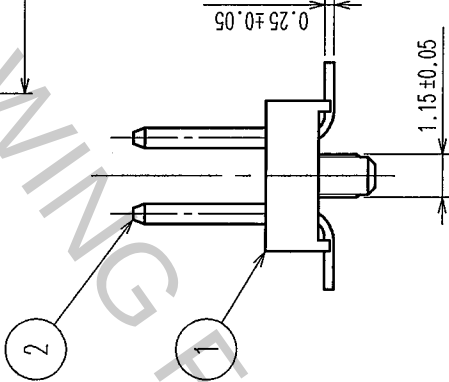

1	POLYPHENYLENE SULFIDE	LIGHT BROWN / UL94 V-0	2	BRASS	CONTACT AREA: GOLD 0.2μm min. MOUNTING AREA: GOLD FLASH UNDER PLATING: NICKEL 2μm min.
---	-----------------------	------------------------	---	-------	--

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)			DESIGNED	CHECKED	APPROVED
			T. NODA	K. Doi	H. Okawa
			05.03.30	05.03.30	05.03.30

DRAWING NO.	PART NO.	CODE NO.
EDC3-082601-21	A3A-*PA-2SV(71)	
SCALE		
FREE		
UNITS		
mm		

注 1 LEAD CO-PLANARITY SHALL BE 0.15 MAX.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
3 IN CASE OF THE AUTOMATED MOUNTING, RECOMMENDED HOLE DIAMETER OF BOSS SHALL BE 1.2^{+0.1}₀.
4 NUMBER OF CONTACT.

TO
PCK

CL621

HIROSE ELECTRIC CO., LTD

HRS

FREE

mm

UNITS

SCALE

DRAWING NO.

PART NO.

CODE NO.

CL621

HIROSE ELECTRIC CO., LTD

HRS

FREE

mm

UNITS

SCALE

DRAWING NO.

PART NO.

CODE NO.

CL621

HIROSE ELECTRIC CO., LTD

HRS

FREE

mm

UNITS

SCALE

DRAWING NO.

PART NO.

CODE NO.

CL621

HIROSE ELECTRIC CO., LTD

HRS