



Ordering number CA11353_LAURA-RS

Family	Laura	FWHM	(simulated) 8
Type	Assembly	Efficiency	(simulated) 0 %
LED	Z5	cd/lm	-
Color	Black	Gerber File	Available
Diameter	21.6 mm		
Height	13.1 mm		
Style	Square		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Tape		
Status	Ready		

Ordering number CA11355_LAURA-M

Family	Laura	FWHM	(simulated) 15
Type	Assembly	Efficiency	(simulated) 0 %
LED	Z5	cd/lm	-
Color	Black	Gerber File	Available
Diameter	21.6 mm		
Height	13.1 mm		
Style	Square		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Tape		
Status	Ready		

Ordering number CA11365_LAURA-O

Family	Laura	FWHM	(simulated) 12+36
Type	Assembly	Efficiency	(simulated) 0 %
LED	Z5	cd/lm	-
Color	Black	Gerber File	Available
Diameter	21.6 mm		
Height	13.1 mm		
Style	Square		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Tape		
Status	Ready		

Ordering number CA11643_LAURA-SS

Family	Laura	FWHM	(simulated) 10
Type	Assembly	Efficiency	(simulated) 0 %
LED	Z5	cd/lm	-
Color	Black	Gerber File	Available
Diameter	21.6 mm		
Height	13.1 mm		
Style	Square		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Tape		
Status	Ready		



Ordering number CA11360_LAURA-D

Family	Laura	FWHM	14 degrees
Type	Assembly	Efficiency	(simulated) 0 %
LED	Z5	cd/lm	-
Color	Black	Gerber File	Available
Diameter	21.6 mm		
Height	13.1 mm		
Style	Square		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Tape		
Status	Ready		



Ordering number CA11766_LAURA-WW

Family	Laura	FWHM	62 degrees
Type	Assembly	Efficiency	(simulated) 0 %
LED	Z5	cd/lm	-
Color	Black	Gerber File	Available
Diameter	21.6 mm		
Height	13.1 mm		
Style	Square		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Tape		
Status	Ready		



Ordering number CA11525_LAURA-R-W

Family	Laura	FWHM	71 degrees
Type	Assembly	Efficiency	(simulated) 0 %
LED	Z5	cd/lm	-
Color	Black	Gerber File	Available
Diameter	21.6 mm		
Height	13.1 mm		
Style	Square		
Optic Material	PC		
Holder Material	PC		
Fastening	Tape		
Status	Ready		

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

GENERAL INFORMATION

- Product series especially designed & optimized for Z5 series of LEDs.
- Special care taken to make light distribution as uniform as possible.
- Lens material optical grade PMMA with high UV and temperature resistance. Allows use of high current and temperature conditions.

Please find more information about used material from below:

http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%208N%20UL94_Yellow%20Card.pdf
<http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%208N%20PLEXIGLAS-Datasheet.pdf>

- Lens material optical grade PC with high UV and temperature resistance (120 degrees of Celcius / 248 degrees of Fahrenheit). Allows use of high current and temperature conditions.

Please find more information about used materials from below:

http://ledil.fi/sites/default/files/Documents/Technical/Material/PC%20Makrolon%202400_2407_2456_2458-UL.pdf

- Reflector is made of aluminium coated PC (120 degrees of Celcius / 248 degrees of Fahrenheit) with protective lacquer (110 degrees of Celcius / 230 degrees of Fahrenheit).
- Optic holder molded by high quality PC material (120 dergees of Celcius / 248 degrees of Fahrenheit).

- Fastening to heat sink with a PU foam adhesive tape of automotive grade. Please find fastening details by clicking link: http://www.ledil.com/datasheets/DataSheet_TAPE.pdf


NOTE 1: We advise customer to ensure the suitability and sufficiency of the bond in the end product. For example, mechanical stress, vibration and holes on the surface of the circuit board weaken the strength of the tape.


NOTE 2: Assembly to the surface must be made straight, so the tape bonds constant and balanced with fastening surface. Slanted assembly might cause unbalanced bond to the surface. All surfaces where tape is applied must be clean, dry and free from grease and dirt.

If cleaning of PCB surfaces is needed, please follow strictly the cleaning instructions of your LED manufacturer - this is important as cleaning shall under no circumstances damage LEDs or other electronics components on the PCB.


Further note that optical components shall not be cleaned with any chemicals - only micro fiber cloth may be used to remove fingerprints or other traces from handling.

Relative intensity of CA11525_Laura-Refl-W-Z5-tape

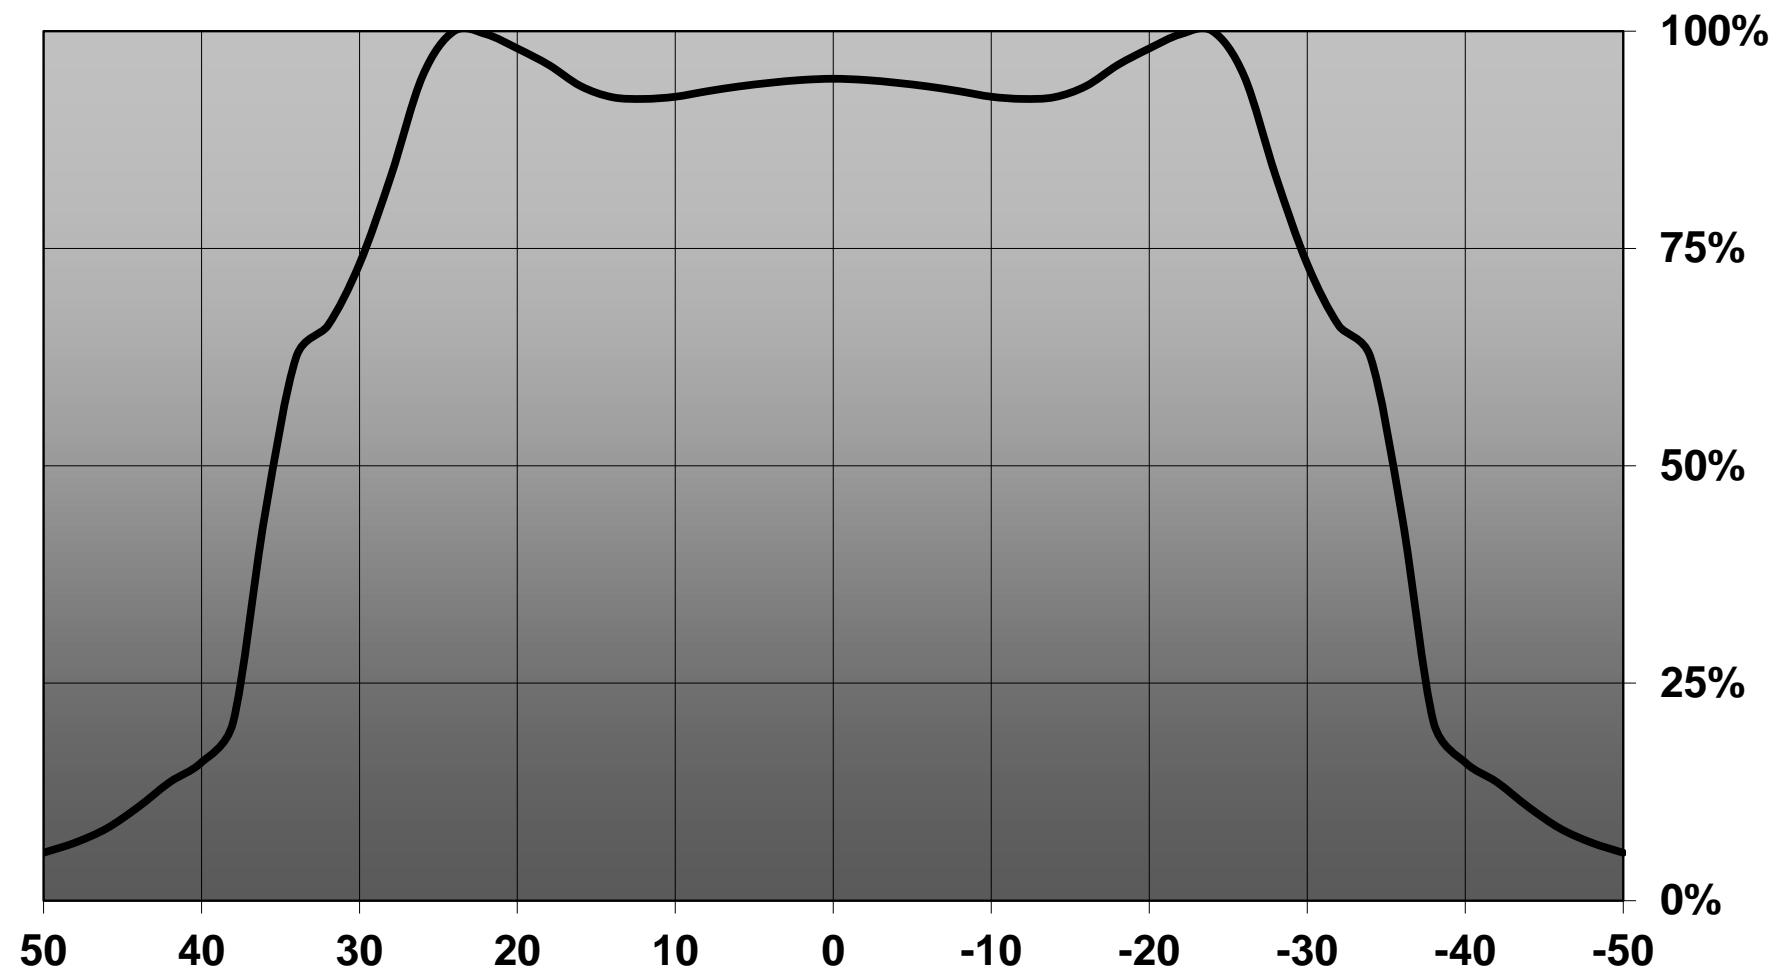




Isometric view
Scale: 1:1

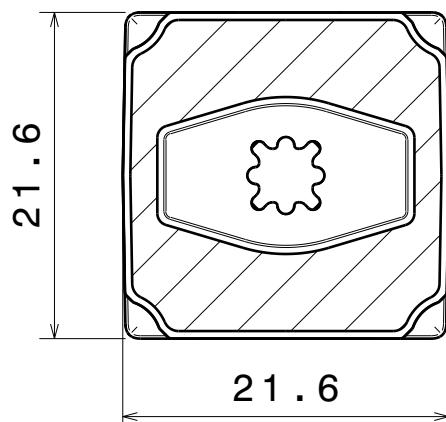

Bottom view

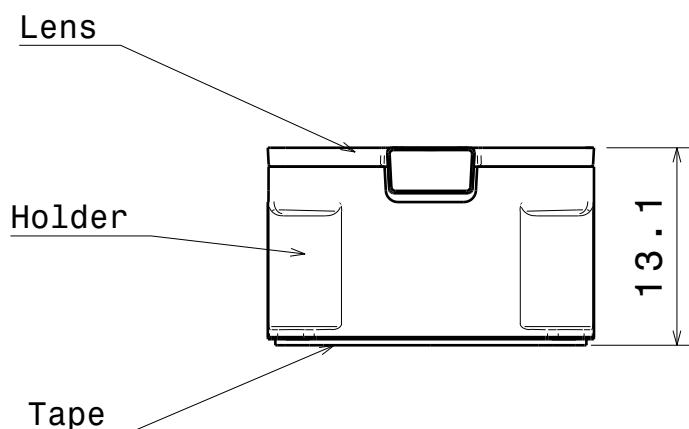

Front view

Materials
lens: PMMA
holder: PC, black
Tape: PU Foam

This drawing is our property.
It can't be reproduced
or communicated without
our written agreement.

LEDIL
DRAWING TITLE

L T F F e i n

DRAWN BY p DATE 11.06.2010

DRAWING NUMBER

Datasheet Laura-tape series assy

REV
1

CHECKED BY h DATE 25.01.2010

SIZE

A4

DRAWING NUMBER

CA11353

DESIGNED BY hh DATE 21.01.2010

SCALE

2:1

WEIGHT(g)

SHEET 1/1